


# **SERVICE MANUAL**

## **DL3103DC**

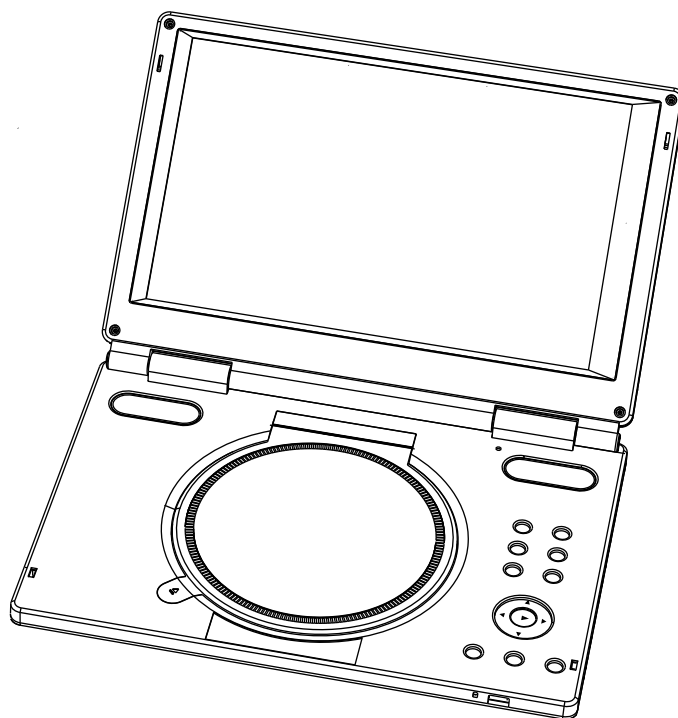

# CONTENTS

---

1.	SAFETY PRECAUTIONS .....	1
2.	PREVENTION OF ELECTRO STATIC DISCHARGE(ESD)TO ELECTROSTATICALLY SENSITIVE(ES)DEVICES .....	1
3.	CONTROL BUTTON LOCATIONS AND EXPLANATIONS .....	2
4.	PREVERTION OF STATIC ELECTRICITY DISCHARGE .....	4
5.	ELECTRICAL CONFIRMATION .....	5
5.1	VIDEO OUTPUT (LUMINANCE SIGNAL) CONFIRMATION .....	5
5.2	VIDEO OUTPUT(CHROMINANCE SIGNAL) CONFIRMATION .....	6
6.	MPEG BOARD CHECK WAVEFORM .....	7
7.2	MT1389 .....	8
7.3	HY29LV160 .....	11
7.4	HY57V641620HG .....	14
8.	SCHEMATIC & PCB WIRING DIAGRAM .....	17
9.	SPARE PARTS LIST .....	33

# 1. SAFETY PREAUTIONS

## 1.1 GENERAL GUIDELINES

1. When servicing, observe the original lead dress. if a short circuit is found, replace all parts which have been overheated or damaged by the short circuit.
2. After servicing, see to it that all the protective devices such as insulation barrier, insulation papers shields are properly installed.
3. After servicing, make the following leakage current checks to prevent the customer from being exposed to shock hazards.

## 2.PREVENTION OF ELECTRO STATIC DISCHARGE(ESD)TO ELECTROSTATICALLY SENSITIVE(ES)DEVICES

Some semiconductor(solid state)devices can be damaged easily by static electricity. Such components commonly are called Electrostatically Sensitive(ES)Devices. Examples of typical ES devices are integrated circuits and some field-effect transistors and semiconductor chip components. The following techniques should be used to help reduce the incidence of component damage caused by electro static discharge(ESD).

1. Immediately before handling any semiconductor component or semiconductor-equipped assembly, drain off any ESD on your body by touching a known earth ground. Alternatively, obtain and wear a commercially availabel discharging ESD wrist strap, which should be removed for potential shock reasons prior to applying power to the unit under test.
2. After removing an electrical assembly equipped with ES devices,place the assembly on a conductive surface such as alminum foil, to prevent electrostatic charge buildup or exposure of the assembly.
3. Use only a grounded-tip soldering iron to solder or unsolder ES devices.
4. Use only an anti-static solder removal device. Some solder removal devices not classified as anti-static (ESD protected)can generate electrical charge sufficient to damage ES devices.
5. Do not use freon-propelled chemicals. These can generate electrical charges sufficient to damage ES devices.
6. Do not remove a replacement ES device from its protective package until immediately before you are ready to install it. (Most replacement ES devices are packaged with leads electrically shorted together by conductive foam, alminum foil or comparable conductive material).
7. Immediately before removing the protective material from the leads of a replacement ES device, touch the protective material to the chassis or circuit assembly into which the device will be installed.

### Caution

Be sure no power is applied to the chassis or circuit, and observe all other safety precautions.


8. Minimize bodily motions when handling unpackaged replacement ES devices. (Otherwise harmless motion such as the brushing together of your clothes fabric or the lifting of your foot from a carpeted floor can generate static electricity(ESD).

notice (1885x323x2 tiff)

### IMPORTANT SAFETY NOTICE


There are special components used in this equipment which are imporant for safety. These parts are marked by  $\Delta$  in the schematic diagrams, Exploded Views and replacement parts list. It is essential that these critical parts should be replaced with manufacturer's specified parts to prevent shock, fire, or other hazards. Do not modify the original design without permission of manufacturer.

# Control Button Locations and Explanations

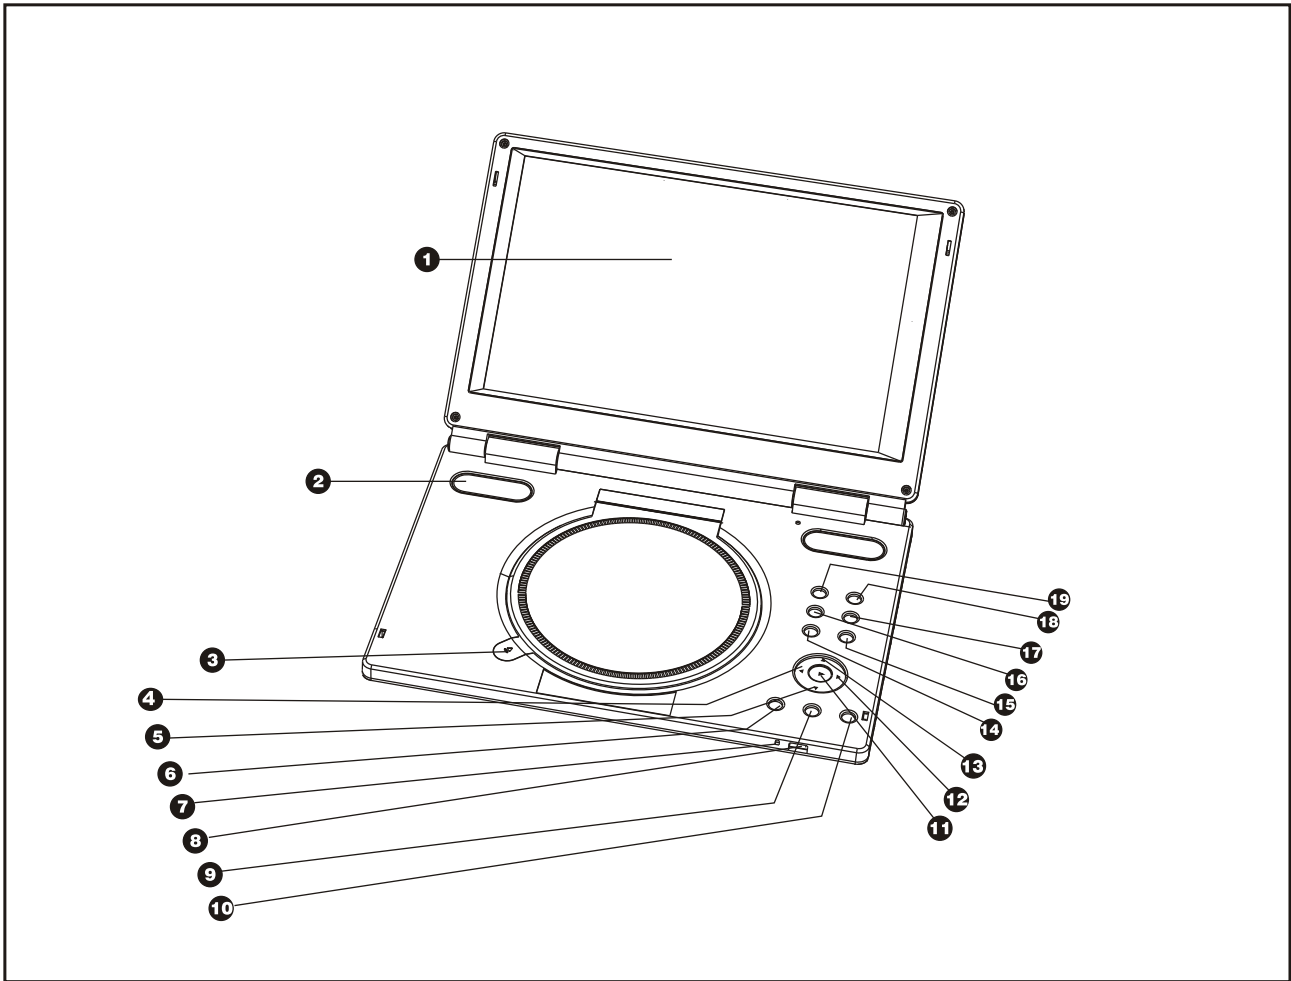

- 1** Color TFT LCD
- 2** Speakers
- 3** OPEN/CLOSE button
- 4** PREV button/LEFT direction arrow
- 5** PAUSE button/DOWN direction arrow
- 6** FUNCTION button
- 7** Power indicator
- 8** IR sensor
- 9** Vol-  
Adjust the volume of headphone and speaker.
- 10** Vol+  
Adjust the volume of headphone and speaker.
- 11** PLAY button
- 12** NEXT button/RIGHT direction arrow
- 13** STOP button/UP direction arrow
- 14** BROWSER button
- 15** Q-PLAY button
- 16** DVD/READER Button
- 17** PANEL/SWITCH button
- 18** SETUP Button
- 19** MENU Button

# Remote Control Illustration

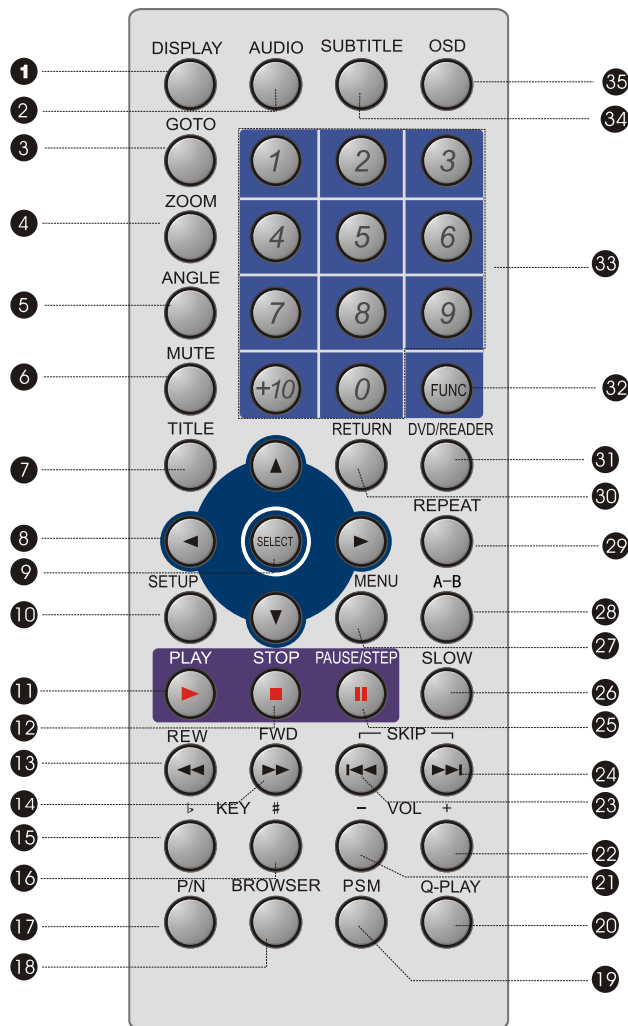

- 1** **DISPLAY** Button  
Display the electrical balance.
- 2** **AUDIO** Button  
Change the audio language or audio channel.
- 3** **GOTO** button  
Play from the desired location.
- 4** **ZOOM** Button  
Zoom in /out the displayed frame.
- 5** **ANGLE** Button  
Change camera angles, MP3/JPEG playback modes switch.
- 6** **MUTE** button  
Press once to mute, twice to unmute.
- 7** **TITLE** button  
DVD titles.
- 8** **CURSOR** Buttons
- 9** **SELECT** Button
- 10** **SETUP** Button  
Function setup.
- 11** **PLAY** Button  
Normal playback.
- 12** **STOP** Button  
Stop playback.
- 13** **REW** Button  
Fast backward play.
- 14** **FWD** Button  
Fast forward play.
- 15** **KEY**  $\downarrow$  Button  
Fall tone.
- 16** **KEY** # Button  
Rise tone.
- 17** **P/N** Button  
Switch the TV system between PAL, NTSC and AUTO.
- 18** **BROWSER**  
Switch new user interface.
- 19** **PSM** Button  
Power Spectrum Meter on/off.
- 20** **Q-PLAY** Button  
Skip the advertisement/warning and play DVD directly.
- 21** **VOLUME-**  
Decrease volume.
- 22** **VOLUME+**  
Increase volume.
- 23** **PREV** Button  
Skip backward.
- 24** **NEXT** Button  
Skip forward.
- 25** **PAUSE/STEP** Button  
Pause or play frame by frame.
- 26** **SLOW** Button  
Slow play.
- 27** **MENU** Button  
Display DVD menu or open/close PBC.
- 28** **A-B** Button  
Repeat the select.
- 29** **REPEAT** Button  
Repeat play.
- 30** **RETURN** Button  
Back to the previous menu/  
Clearing input numbers.
- 31** **DVD/READER** Button
- 32** **FUNC** Button
- 33** **NUMBER** Buttons
- 34** **SUBTITLE** Button  
Change subtitle languages/  
Switch JPEG display modes.
- 35** **OSD** Button  
Display or hide disc information.

## 4. PREVENTION OF STATIC ELECTRICITY DISCHARGE

The laser diode in the traverse unit (optical pickup) may break down due to static electricity of clothes or human body. Use due caution to electrostatic breakdown when servicing and handling the laser diode.

### 4.1. Grounding for electrostatic breakdown prevention


Some devices such as the DVD player use the optical pickup (laser diode) and the optical pickup will be damaged by static electricity in the working environment. Proceed servicing works under the working environment where grounding works is completed.

#### 4.1.1. Worktable grounding

1. Put a conductive material (sheet) or iron sheet on the area where the optical pickup is placed, and ground the sheet.

#### 4.1.2. Human body grounding

1 Use the anti-static wrist strap to discharge the static electricity from your body.

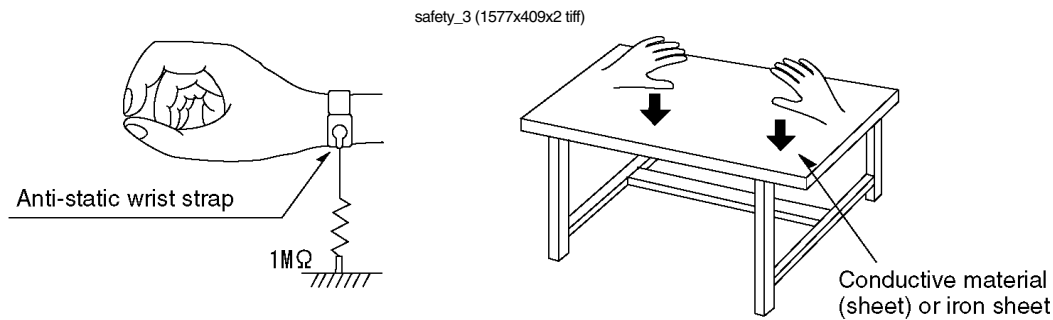

#### 4.1.3. Handling of optical pickup

1. To keep the good quality of the optical pickup maintenance parts during transportation and before installation, the both ends of the laser diode are short-circuited. After replacing the parts with new ones, remove the short circuit according to the correct procedure. (See this Technical Guide).
2. Do not use a tester to check the laser diode for the optical pickup. Failure to do so will damage the laser diode due to the power supply in the tester.

### 4.2. Handling precautions for Traverse Unit (Optical Pickup)

1. Do not give a considerable shock to the traverse unit (optical pickup) as it has an extremely high-precision structure.
2. When replacing the optical pickup, install the flexible cable and cut its short lead with a nipper. See the optical pickup replacement procedure in this Technical Guide. Before replacing the traverse unit, remove the short pin for preventing static electricity and install a new unit. Connect the connector as short times as possible.
3. The flexible cable may be cut off if an excessive force is applied to it. Use caution when handling the cable.
4. The half-fixed resistor for laser power adjustment cannot be adjusted. Do not turn the resistor.

## 5. Electrical Confirmation


### 5.1. Video Output (Luminance Signal) Confirmation

DO this confirmation after replacing a P.C.B.

Measurement point	Mode	Disc
Video output terminal	Color bar 75% PLAY(Title 46):DVDT-S15 PLAY(Title 12):DVDT-S01	DVDT-S15 or DVDT-S01
Measuring equipment,tools	Confirmation value	
200mV/dir,10 $\mu$ sec/dir	1000mVp-p $\pm$ 30mV	

Purpose:To maintain video signal output compatibility.

- 1.Connect the oscilloscope to the video output terminal and terminate at 75 ohms.
- 2.Confirm that luminance signal(Y+S)level is 1000mVp-p $\pm$ 30mV

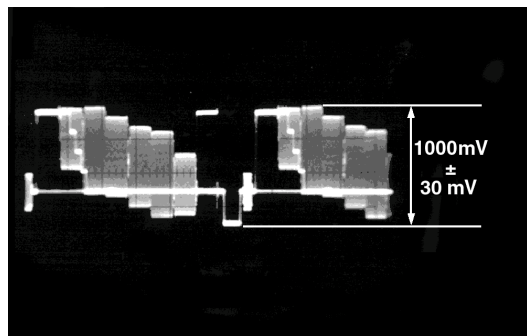


## 5.2 Video Output(Chrominance Signal) Confirmation

Do the confirmation after replacing P.C.B.

Measurement point	Mode	Disc
Video output terminal	Color bar 75% PLAY(Title 46):DVDT-S15 PLAY(Title 12):DVDT-S01	DVDT-S15 or DVDT-S01
Measuring equipment,tools	Confirmation value	
Screwdriver,Oscilloscope 200mV/dir,10 $\mu$ sec/dir	621mVp-p $\pm$ 30mV	

Purpose:To maintain video signal output compatibility.


- 1.Connect the oscilloscope to the video output terminal and terminate at 75 ohme.
- 2.Confirm that the chrominance signal(C)level is 621 mVp-p $\pm$ 30mV

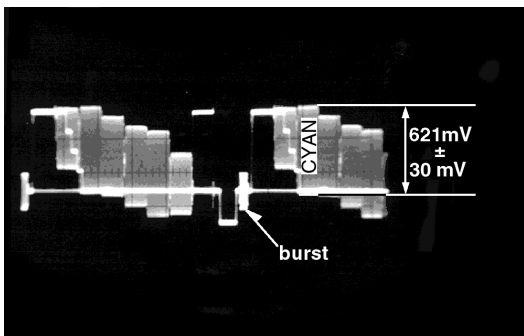



# 6.MPEG BOARD CHECK WAVEFORM

## 6.1 27MHz WAVEFORM

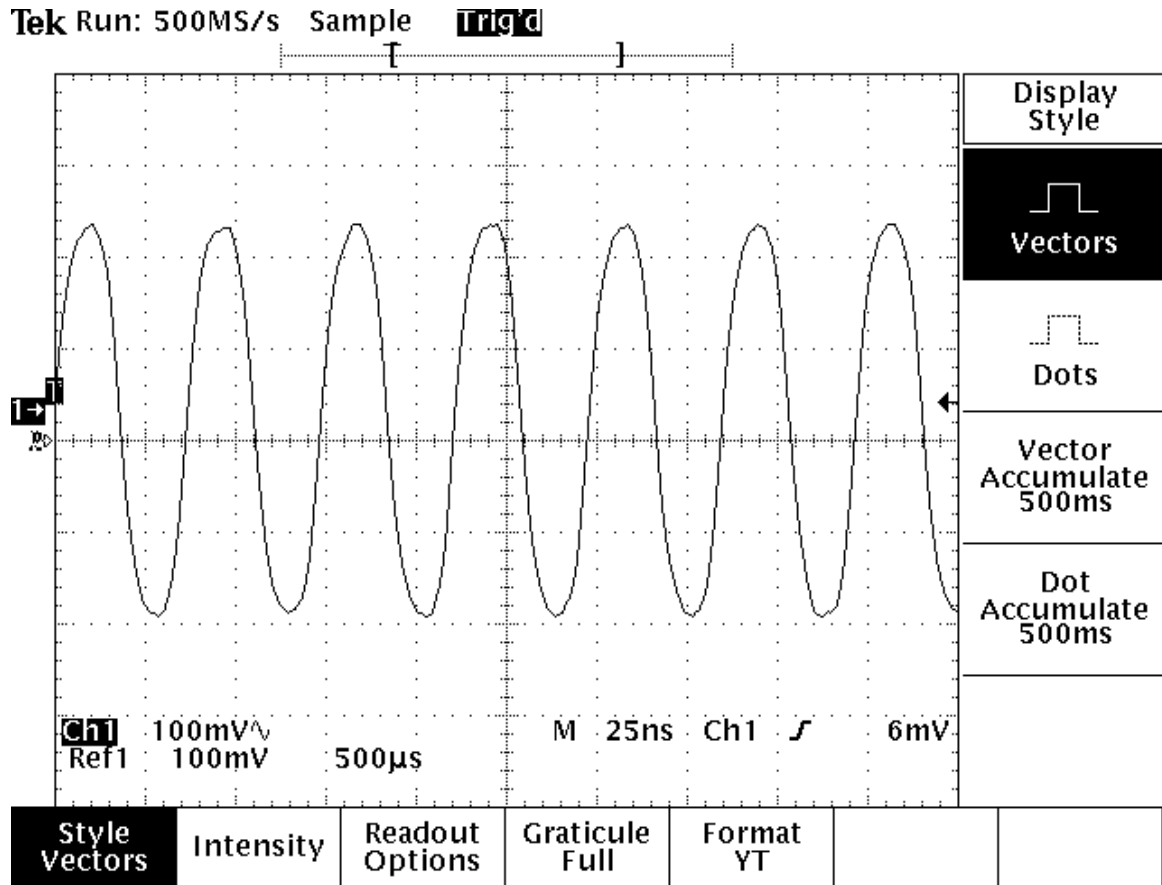

## 7.2 MT1389

## MT1389


### Progressive-Scan DVD Player SOC

Specifications are subject to change without notice

**MediaTek MT1389** is a DVD player system-on-chip (SOC) which incorporates advanced features like high quality TV encoder and state-of-art de-interlace processing. The MT1389 enables consumer electronics manufacturers to build high quality, cost-effective DVD players, portable DVD players or any other home entertainment audio/video devices.

Based on MediaTek's world-leading DVD player SOC architecture, the MT1389 is the 3<sup>rd</sup> generation of the DVD player SOC. It integrates the MediaTek 2<sup>nd</sup> generation front-end analog RF amplifier and the Servo/MPEG AV decoder.

The progressive scan of the MT1389 utilized a proprietary advanced motion-adaptive de-interlace algorithm to achieve the best movie/video playback. It can easily detect 3:2/2:2 pull down source and restore the correct original pictures. It also supports a patent-pending edge-preserving algorithm to remove the saw-tooth effect.

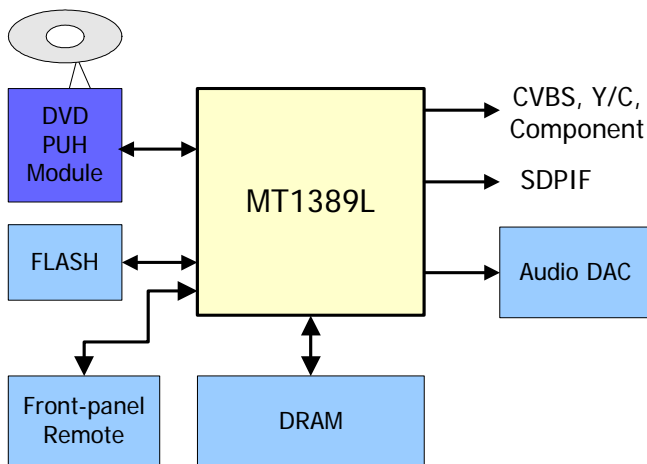

DVD Player System Diagram Using MT1389

#### Key Features

- RF/Servo/MPEG Integration
- High Performance Audio Processor
- Motion-Adaptive, Edge-Preserving De-interlace
- 108MHz/12-bit, 6 CH TV Encoder

#### Applications

- Standard DVD Players
- Portable DVD Players

## General Feature List

- Super Integration DVD player single chip
  - High performance analog RF amplifier
  - Servo controller and data channel processing
  - MPEG-1/MPEG-2/JPEG video
  - Dolby AC-3/DTS/DVD-Audio
  - Unified memory architecture
  - Versatile video scaling & quality enhancement
  - OSD & Sub-picture
  - 2-D graphic engine
  - Built-in clock generator
  - Built-in high quality TV encoder
  - Built-in progressive video processor
  - Audio effect post-processor
  - Audio input port
- High Performance Analog RF Amplifier
  - Programmable fc
  - Dual automatic laser power control
  - Defect and blank detection
  - RF level signal generator
- Speed Performance on Servo/Channel Decoding
  - DVD-ROM up to 4XS
  - CD-ROM up to 24XS
- Channel Data Processor
  - Digital data slicer for small jitter capability
  - Built-in high performance data PLL for channel data demodulation
  - EFM/EFM+ data demodulation
  - Enhanced channel data frame sync protection & DVD-ROM sector sync protection
- Servo Control and Spindle Motor Control
  - Programmable frequency error gain and phase error gain of spindle PLL to control spindle motor on CLV and CAV mode
  - Built-in ADCs and DACs for digital servo control
  - Provide 2 general PWM
  - Tray control can be PWM output or digital output
- Embedded Micro controller
  - Built-in 8032 micro controller
  - Built-in internal 373 and 8-bit programmable lower address port
- 1024-bytes on-chip RAM
- Up to 4M bytes FLASH-programming interface
- Supports 5/3.3-Volt. FLASH interface
- Supports power-down mode
- Supports additional serial port
- DVD-ROM/CD-ROM Decoding Logic
  - High-speed ECC logic capable of correcting one error per each P-codeword or Q-codeword
  - Automatic sector Mode and Form detection
  - Automatic sector Header verification
  - Decoder Error Notification Interrupt that signals various decoder errors
  - Provide error correction acceleration
- Buffer Memory Controller
  - Supports 16Mb/32Mb/64Mb/128Mb SDRAM
  - Supports 16-bit SDRAM data bus
  - Provide the self-refresh mode SDRAM
  - Block-based sector addressing
  - Support 3.3 Volt. DRAM Interface
- Video Decode
  - Decodes MPEG1 video and MPEG2 main level, main profile video (720/480 and 720x576)
  - Smooth digest view function with I, P and B picture decoding
  - Baseline, extended-sequential and progressive JPEG image decoding
  - Support CD-G titles
- Video/OSD/SPU/HLI Processor
  - Arbitrary ratio vertical/horizontal scaling of video, from 0.25X to 256X
  - 65535/256/16/4/2-color bitmap format OSD,
  - 256/16 color RLC format OSD
  - Automatic scrolling of OSD image
  - Slide show transition as DVD-Audio Specification
- 2-D Graphic Engine
  - Support decode Text and Bitmap
  - Support line, rectangle and gradient fill
  - Support bitblt
  - Chroma key copy operation
  - Clip mask

- Audio Effect Processing
  - Dolby Digital (AC-3)/EX decoding
  - DTS/DTS-ES decoding
  - MLP decoding for DVD-Audio
  - MPEG-1 layer 1/layer 2 audio decoding
  - MPEG-2 layer1/layer2 2-channel audio
  - High Definition Compatible Digital (HDCD)
  - Windows Media Audio (WMA)
  - Advanced Audio Coding (AAC)
  - Dolby ProLogic II
  - Concurrent multi-channel and downmix out
  - IEC 60958/61937 output
    - PCM / bit stream / mute mode
    - Custom IEC latency up to 2 frames
  - Pink noise and white noise generator
  - Karaoke functions
    - Microphone echo
    - Microphone tone control
    - Vocal mute/vocal assistant
    - Key shift up to +/- 8 keys
    - Chorus/Flanger/Harmony/Reverb
  - Channel equalizer
  - 3D surround processing include virtual surround and speaker separation
- TV Encoder
  - Six 108MHz/12bit DACs
  - Support NTSC, PAL-BDGHINM, PAL-60
  - Support 525p, 625p progressive TV format
  - Automatically turn off unconnected channels
  - Support PC monitor (VGA)
  - Support Macrovision 7.1 L1, Macrovision 525P and 625P
  - CGMS-A/WSS
  - Closed Caption
- Progressive Output
  - Automatic detect film or video source
  - 3:2 pull down source detection
  - Advanced Motion adaptive de-interlace
  - Edge Preserving
  - Minimum external memory requirement
- Audio Input
  - Line-in/SPDIF-in for versatile audio processing
- Outline
  - 256-pin LQFP package
  - 3.3/1.8-Volt. Dual operating voltages

# IC BLOCK DIAGRAM & DESCRIPTION




**HY29LV160**  
**16 Mbit (2M x 8/1M x 16) Low Voltage Flash Memory**

## KEY FEATURES

- **Single Power Supply Operation**
  - Read, program and erase operations from 2.7 to 3.6 volts
  - Ideal for battery-powered applications
- **High Performance**
  - 70, 80, 90 and 120 ns access time versions
- **Ultra-low Power Consumption (Typical Values At 5 Mhz)**
  - Automatic sleep mode current: 1  $\mu$ A
  - Standby mode current: 1  $\mu$ A
  - Read current: 9 mA
  - Program/erase current: 20 mA
- **Flexible Sector Architecture:**
  - One 16 KB, two 8 KB, one 32 KB and thirty-one 64 KB sectors in byte mode
  - One 8 KW, two 4 KW, one 16 KW and thirty-one 32 KW sectors in word mode
  - Top or bottom boot block configurations available
- **Sector Protection**
  - Allows locking of a sector or sectors to prevent program or erase operations within that sector
  - Sectors lockable in-system or via programming equipment
  - Temporary Sector Unprotect allows changes in locked sectors (requires high voltage on RESET# pin)
- **Fast Program and Erase Times**
  - Sector erase time: 0.25 sec typical for each sector
  - Chip erase time: 8 sec typical
  - Byte program time: 9  $\mu$ s typical
- **Unlock Bypass Program Command**
  - Reduces programming time when issuing multiple program command sequences
- **Automatic Erase Algorithm Preprograms and Erases Any Combination of Sectors or the Entire Chip**
- **Erase Suspend/Erase Resume**
  - Suspends an erase operation to allow reading data from, or programming data to, a sector that is not being erased
  - Erase Resume can then be invoked to complete suspended erasure
- **Automatic Program Algorithm Writes and Verifies Data at Specified Addresses**
- **100,000 Write Cycles per Sector Minimum**
- **Data# Polling and Toggle Bits**
  - Provide software confirmation of completion of program and erase operations
- **Ready/Busy# Pin**
  - Provides hardware confirmation of completion of program and erase operations
- **Hardware Reset Pin (RESET#) Resets the Device to Reading Array Data**
- **Compliant With Common Flash Memory Interface (CFI) Specification**
  - Flash device parameters stored directly on the device
  - Allows software driver to identify and use a variety of different current and future Flash products
- **Compatible With JEDEC standards**
  - Pinout and software compatible with single-power supply Flash devices
  - Superior inadvertent write protection
- **Space Efficient Packaging**
  - 48-pin TSOP and 48-ball FBGA packages

## LOGIC DIAGRAM

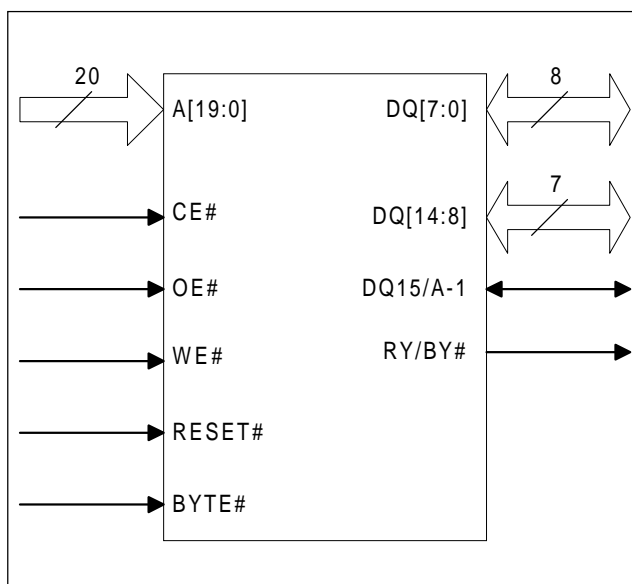


# IC BLOCK DIAGRAM & DESCRIPTION

HY29LV160



## BLOCK DIAGRAM


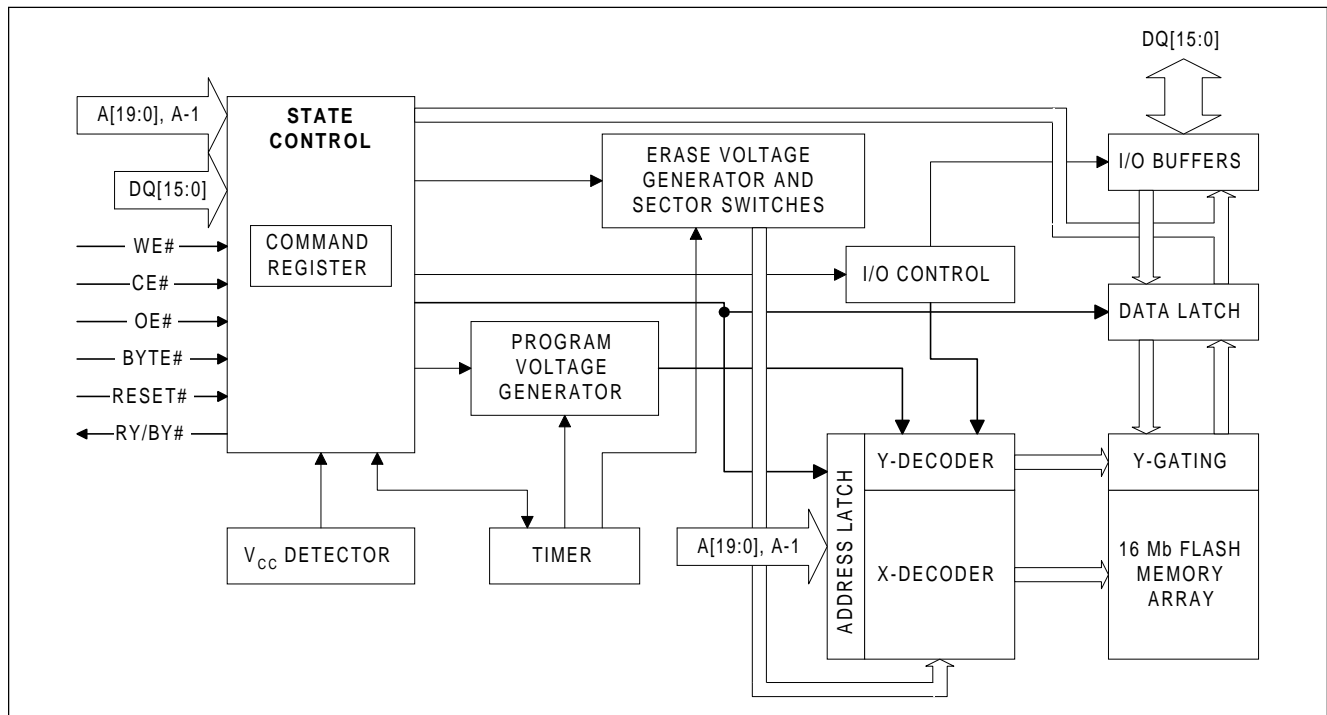


## SIGNAL DESCRIPTIONS

Name	Type	Description
A[19:0]	Inputs	<b>Address, active High.</b> These 20 inputs, combined with the DQ[15]/A[-1] input in Byte mode, select one location within the array for read or write operations.
DQ[15]/A[-1], DQ[14:0]	Inputs/Outputs Tri-state	<b>Data Bus, active High.</b> These pins provide an 8- or 16-bit data path for read and write operations. In Byte mode, DQ[15]/A[-1] is used as the LSB of the 21-bit byte address input. DQ[14:8] are unused and remain tri-stated in Byte mode.
BYTE#	Input	<b>Byte Mode, active Low.</b> Low selects Byte mode, High selects Word mode.
CE#	Input	<b>Chip Enable, active Low.</b> This input must be asserted to read data from or write data to the HY29LV160. When High, the data bus is tri-stated and the device is placed in the Standby mode.
OE#	Input	<b>Output Enable, active Low.</b> Asserted for read operations and negated for write operations. BYTE# determines whether a byte or a word is read during the read operation.
WE#	Input	<b>Write Enable, active Low.</b> Controls writing of commands or command sequences in order to program data or erase sectors of the memory array. A write operation takes place when WE# is asserted while CE# is Low and OE# is High.
RESET#	Input	<b>Hardware Reset, active Low.</b> Provides a hardware method of resetting the HY29LV160 to the read array state. When the device is reset, it immediately terminates any operation in progress. While RESET# is asserted, the device will be in the Standby mode.
RY/BY#	Output Open Drain	<b>Ready/Busy Status.</b> Indicates whether a write or erase command is in progress or has been completed. Remains Low while the device is actively programming data or erasing, and goes High when it is ready to read array data.
V <sub>CC</sub>	--	<b>3-volt (nominal) power supply.</b>
V <sub>SS</sub>	--	<b>Power and signal ground.</b>

# IC BLOCK DIAGRAM & DESCRIPTION

## PIN CONFIGURATIONS

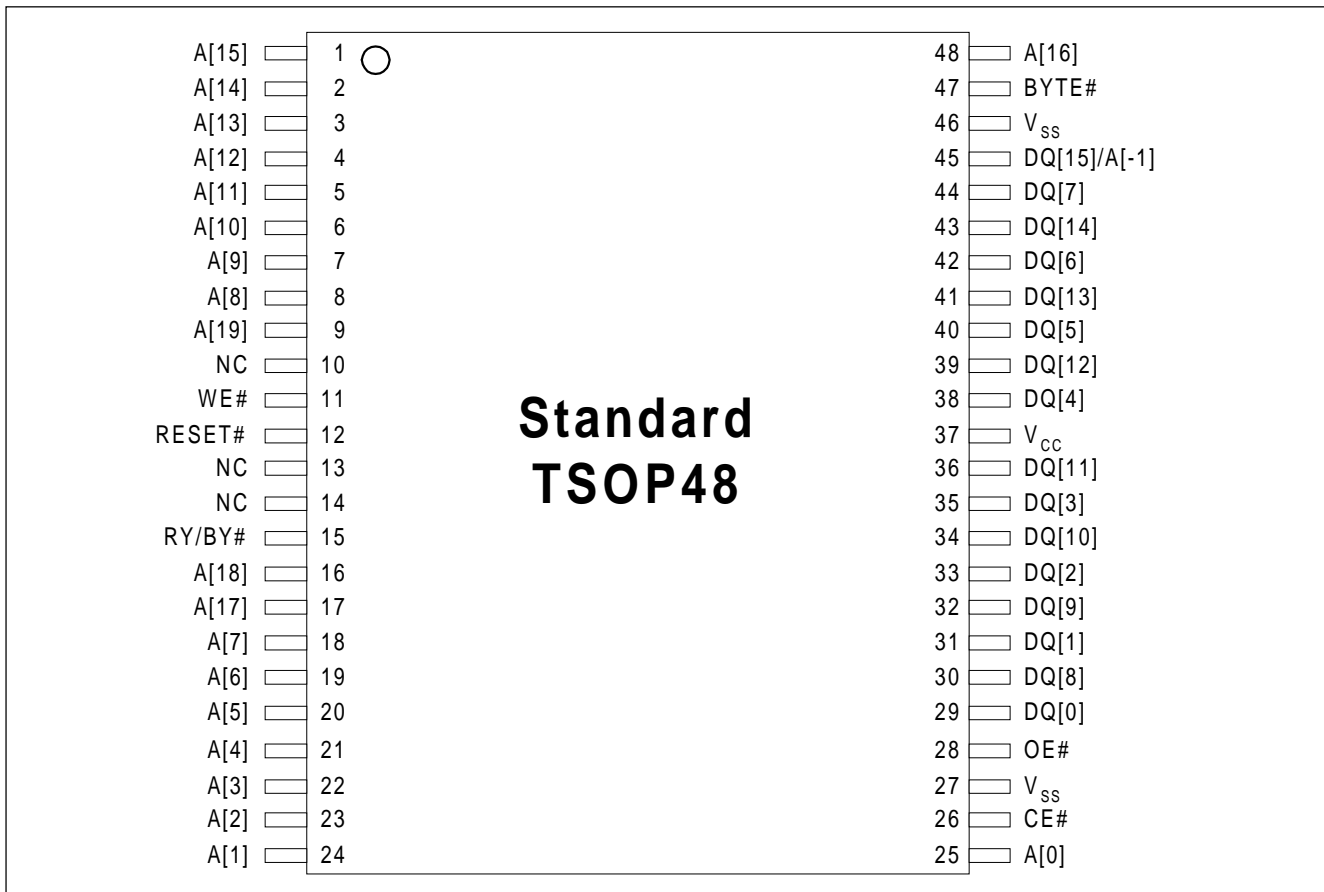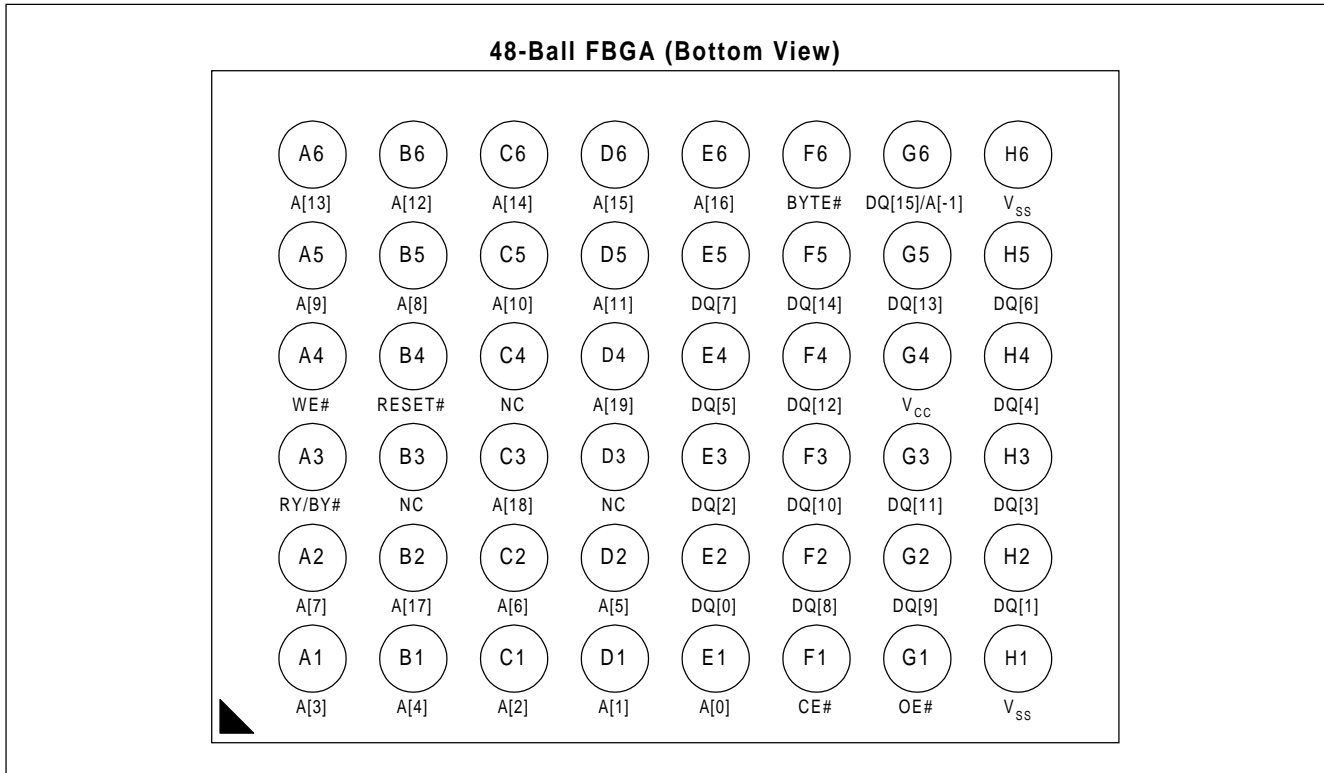

## 7.4 HY57V641620HG

### DESCRIPTION

The Hyundai HY57V641620HG is a 67,108,864-bit CMOS Synchronous DRAM, ideally suited for the main memory applications which require large memory density and high bandwidth. HY57V641620HG is organized as 4banks of 1,048,576x16.

HY57V641620HG is offering fully synchronous operation referenced to a positive edge of the clock. All inputs and outputs are synchronized with the rising edge of the clock input. The data paths are internally pipelined to achieve very high bandwidth. All input and output voltage levels are compatible with LVTTTL.


Programmable options include the length of pipeline (Read latency of 2 or 3), the number of consecutive read or write cycles initiated by a single control command (Burst length of 1,2,4,8 or Full page), and the burst count sequence(sequential or interleave). A burst of read or write cycles in progress can be terminated by a burst terminate command or can be interrupted and replaced by a new burst read or write command on any cycle. (This pipelined design is not restricted by a `2N` rule.)

### FEATURES

- Single 3.3±0.3V power supply <sup>Note)</sup>
- All device pins are compatible with LVTTTL interface
- JEDEC standard 400mil 54pin TSOP-II with 0.8mm of pin pitch
- All inputs and outputs referenced to positive edge of system clock
- Data mask function by UDQM or LDQM
- Internal four banks operation
- Auto refresh and self refresh
- 4096 refresh cycles / 64ms
- Programmable Burst Length and Burst Type
  - 1, 2, 4, 8 or Full page for Sequential Burst
  - 1, 2, 4 or 8 for Interleave Burst
- Programmable  $\overline{\text{CAS}}$  Latency ; 2, 3 Clocks



**PIN CONFIGURATION**

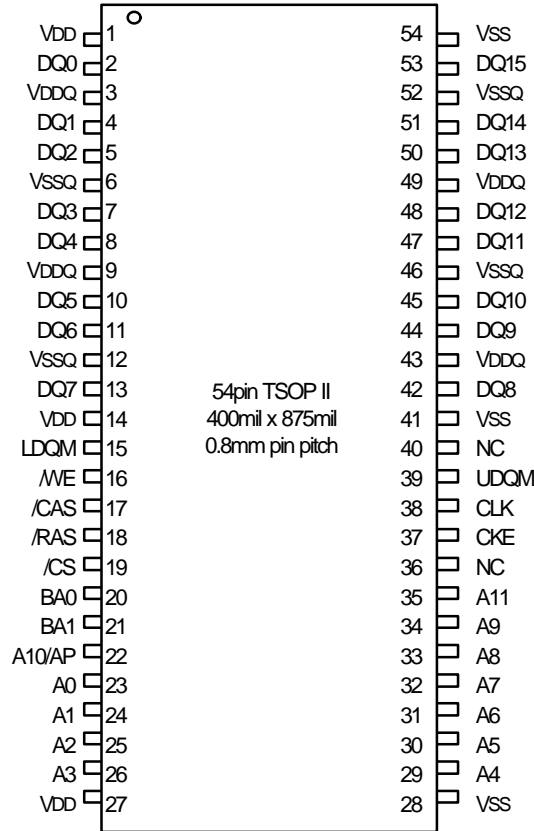


**PIN DESCRIPTION**


PIN	PIN NAME	DESCRIPTION
CLK	Clock	The system clock input. All other inputs are registered to the SDRAM on the rising edge of CLK
CKE	Clock Enable	Controls internal clock signal and when deactivated, the SDRAM will be one of the states among power down, suspend or self refresh
$\overline{CS}$	Chip Select	Enables or disables all inputs except CLK, CKE and DQM
BA0,BA1	Bank Address	Selects bank to be activated during $\overline{RAS}$ activity Selects bank to be read/written during $\overline{CAS}$ activity
A0 ~ A11	Address	Row Address : RA0 ~ RA11, Column Address : CA0 ~ CA7 Auto-precharge flag : A10
$\overline{RAS}$ , $\overline{CAS}$ , $\overline{WE}$	Row Address Strobe, Column Address Strobe, Write Enable	$\overline{RAS}$ , $\overline{CAS}$ and $\overline{WE}$ define the operation Refer function truth table for details
LDQM, UDQM	Data Input/Output Mask	Controls output buffers in read mode and masks input data in write mode
DQ0 ~ DQ15	Data Input/Output	Multiplexed data input / output pin
VDD/VSS	Power Supply/Ground	Power supply for internal circuits and input buffers
VDDQ/VSSQ	Data Output Power/Ground	Power supply for output buffers
NC	No Connection	No connection


**FUNCTIONAL BLOCK DIAGRAM**

1Mbit x 4banks x 16 I/O Synchronous DRAM

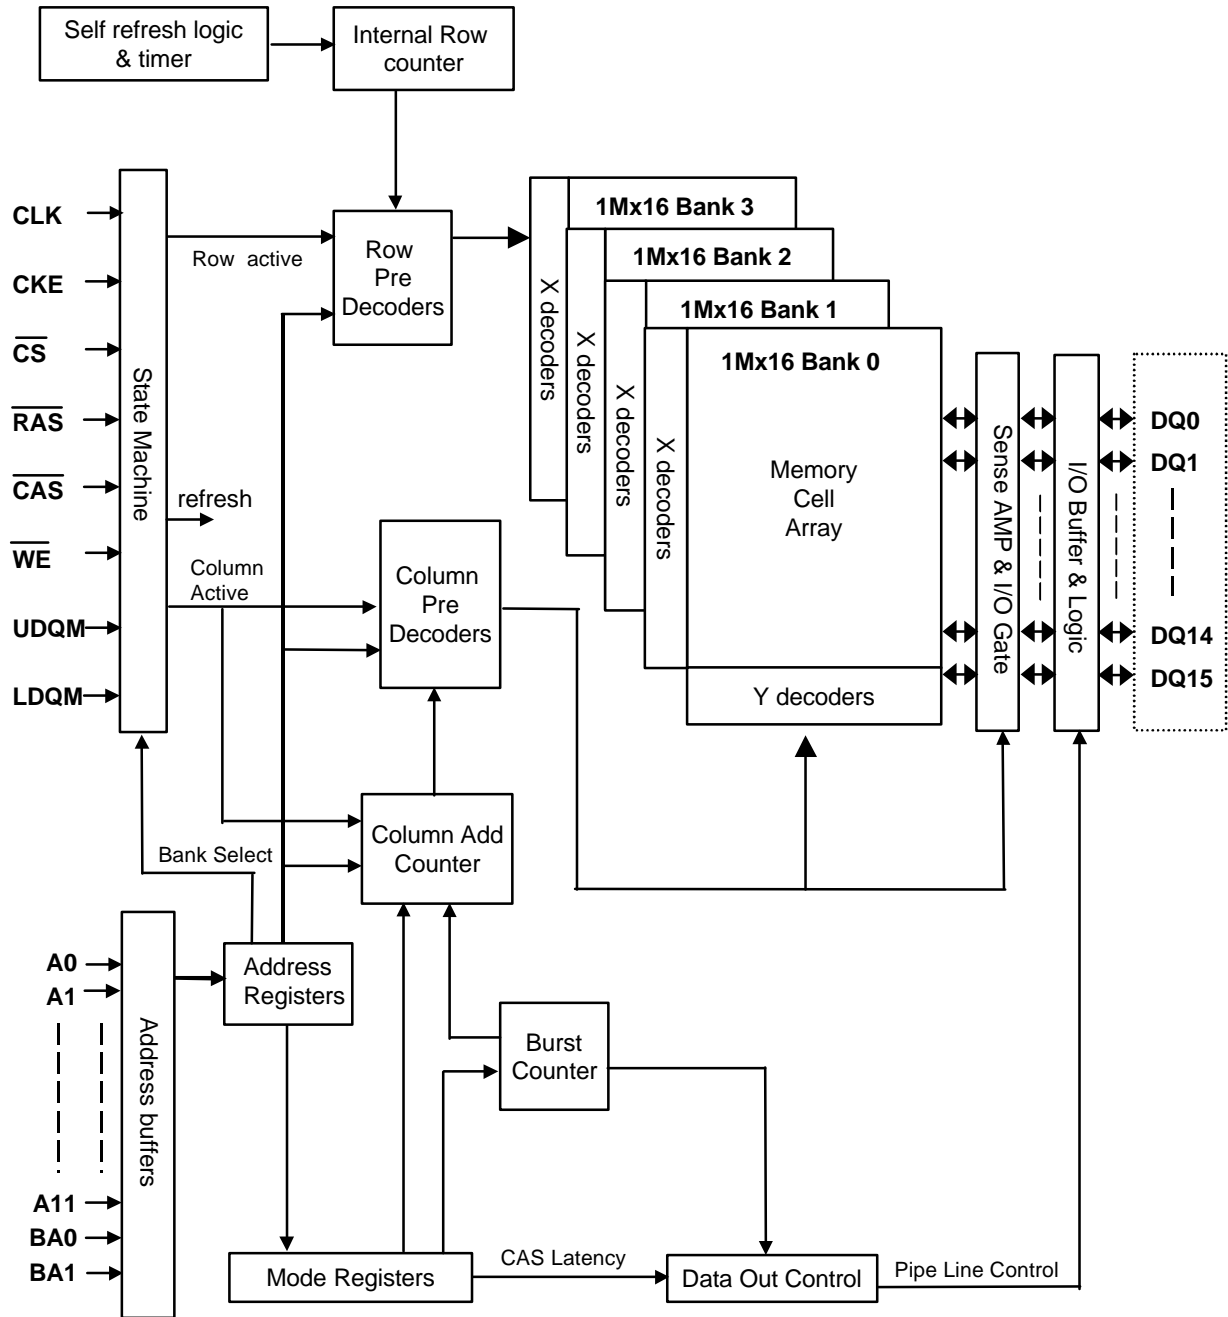

# 8. SCHEMATIC & P.C.B WIRING DIAGRAM DECODE BOARD

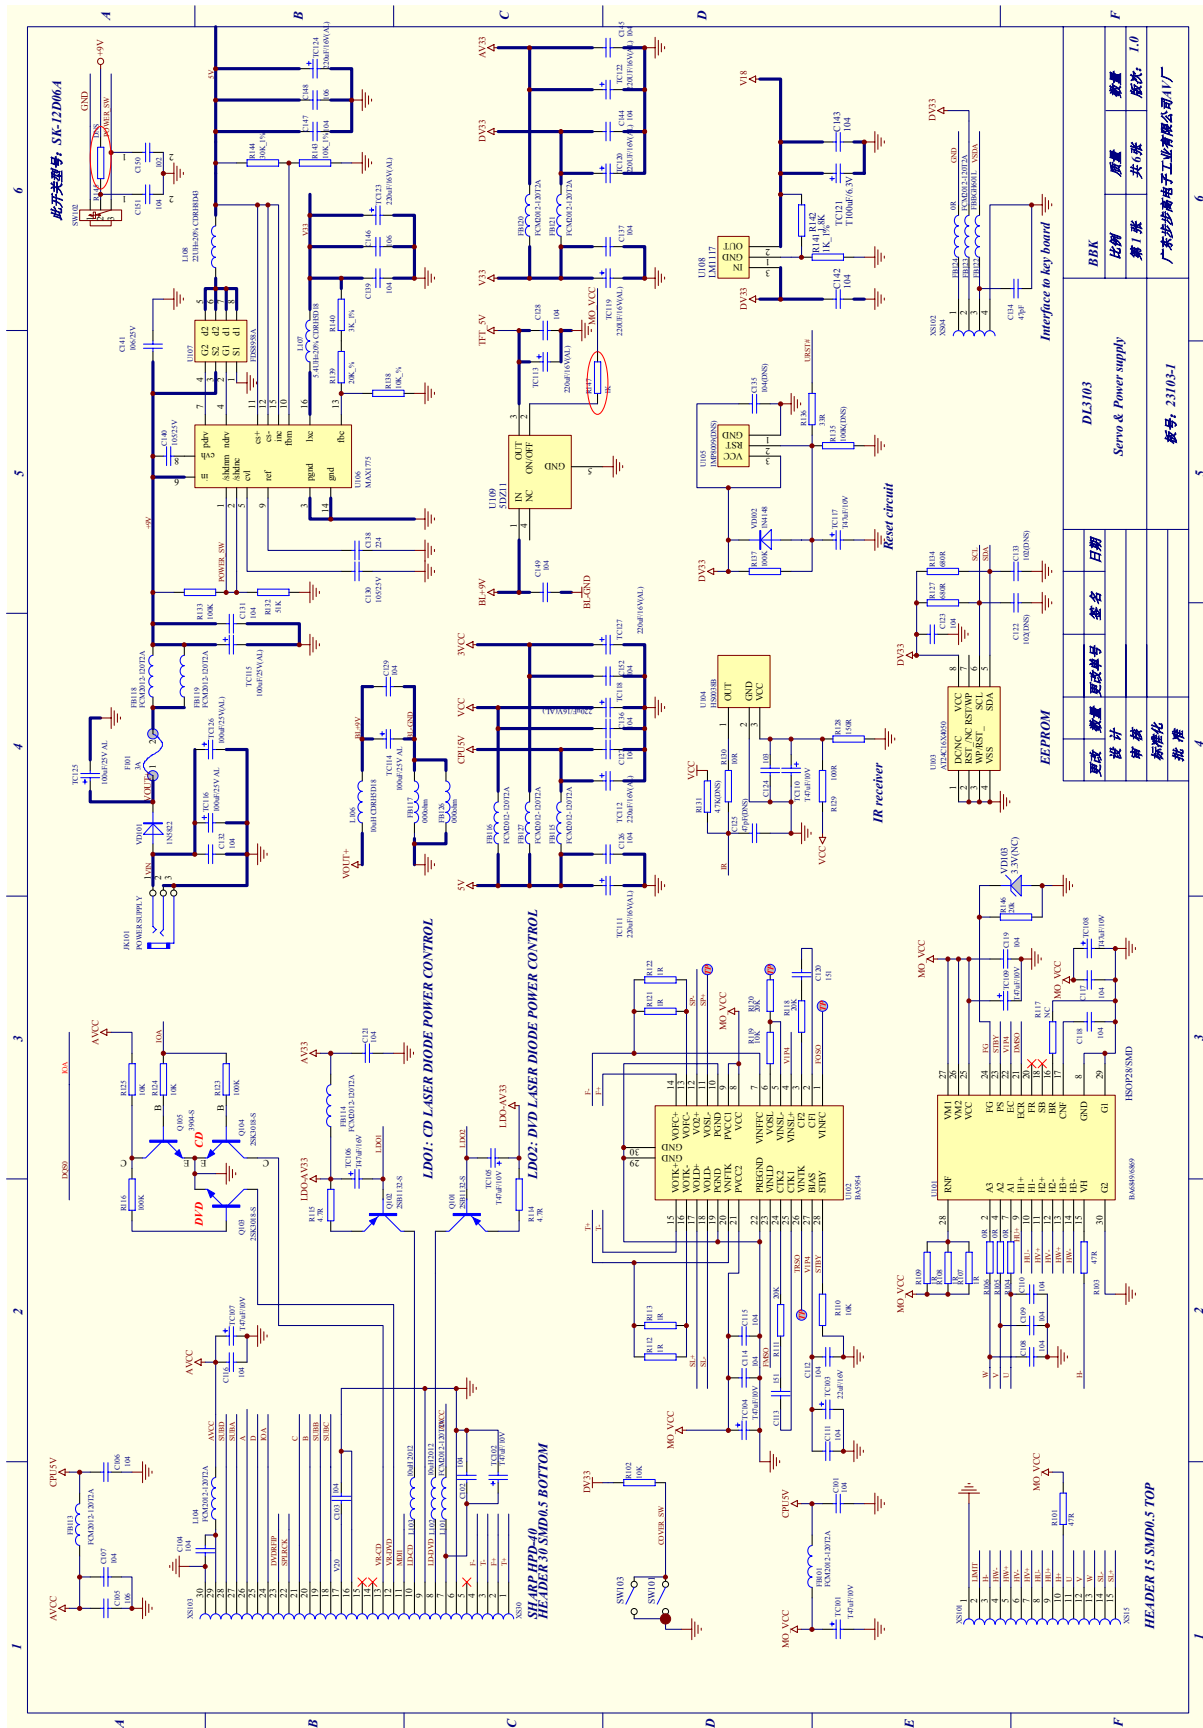

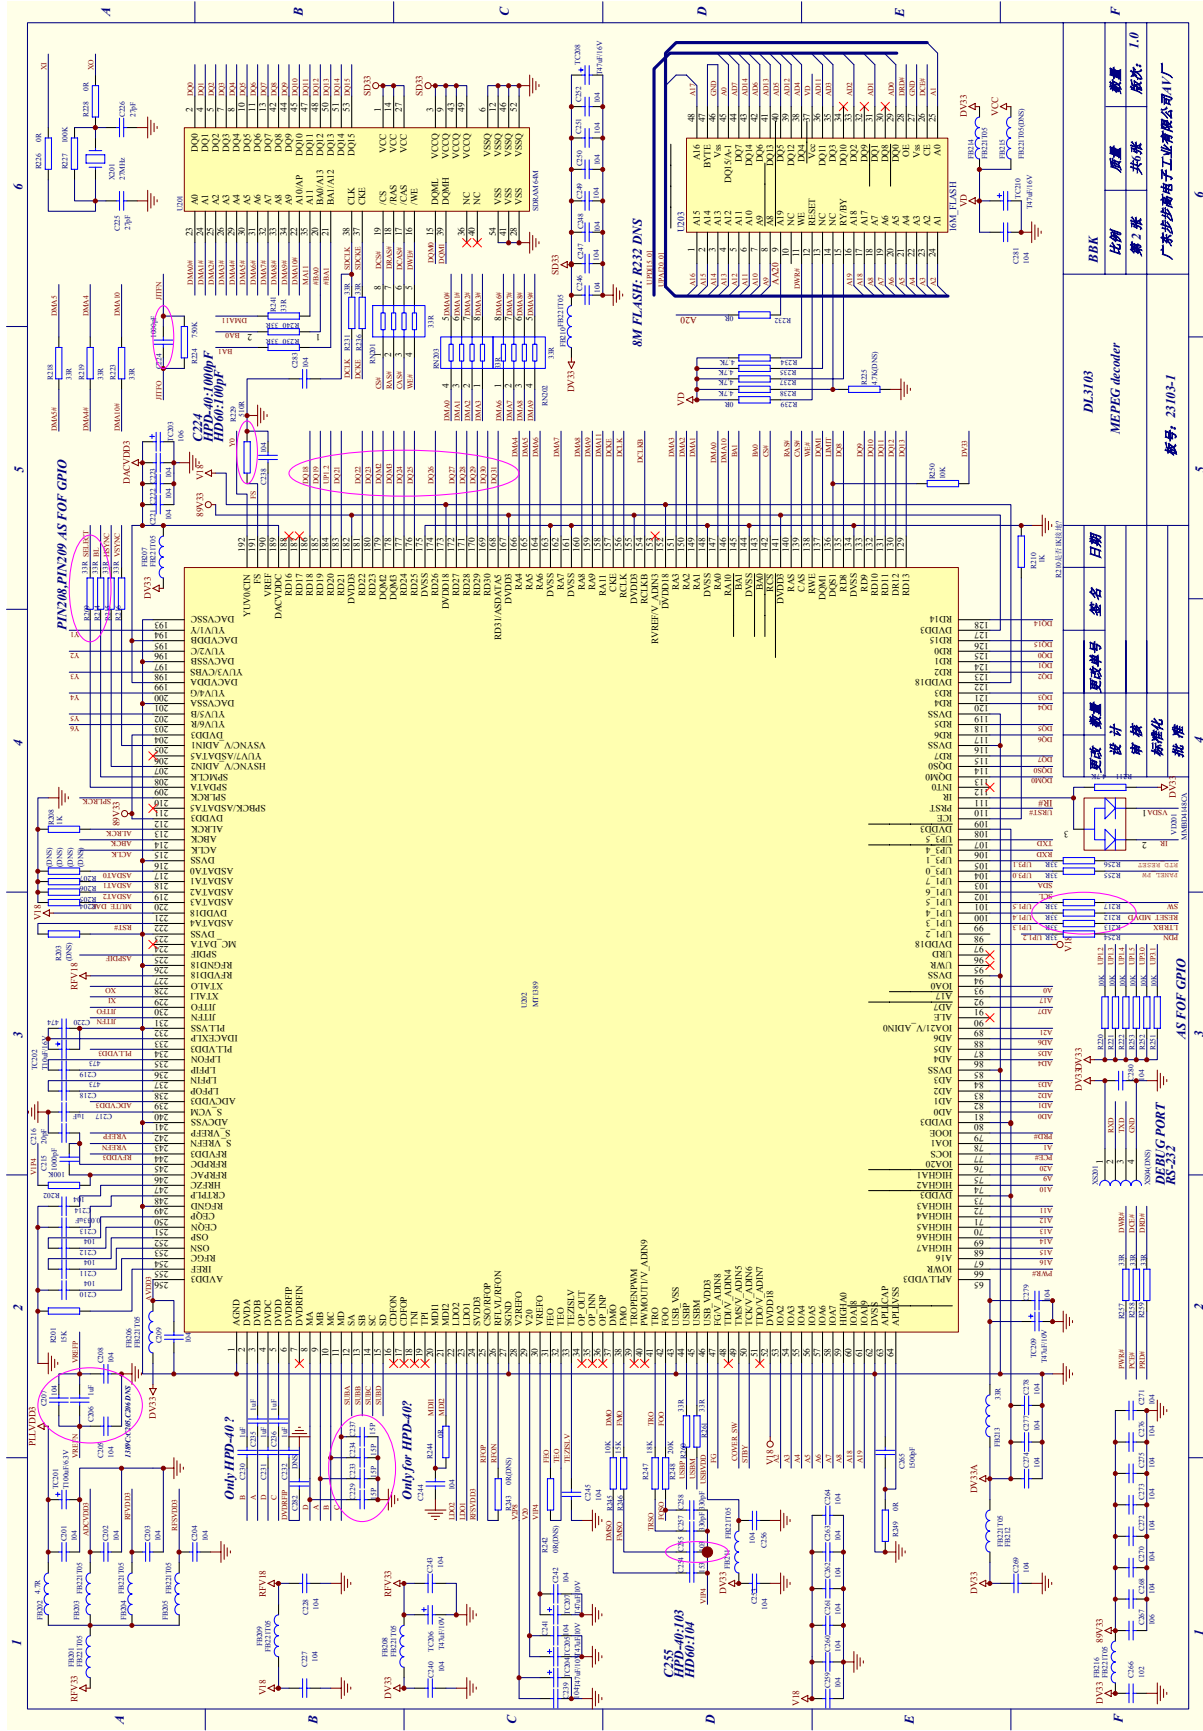

比例	质量	数量
第 2 类	共 1 类	共 1.0

DL3103  
MPEG decoder


设计 日期  
审核 日期  
批准 日期

AS FOF GPIO

DEBBUG PORT  
RS-232

广联海电子有限公司A1厂  
版本号: 23103-1




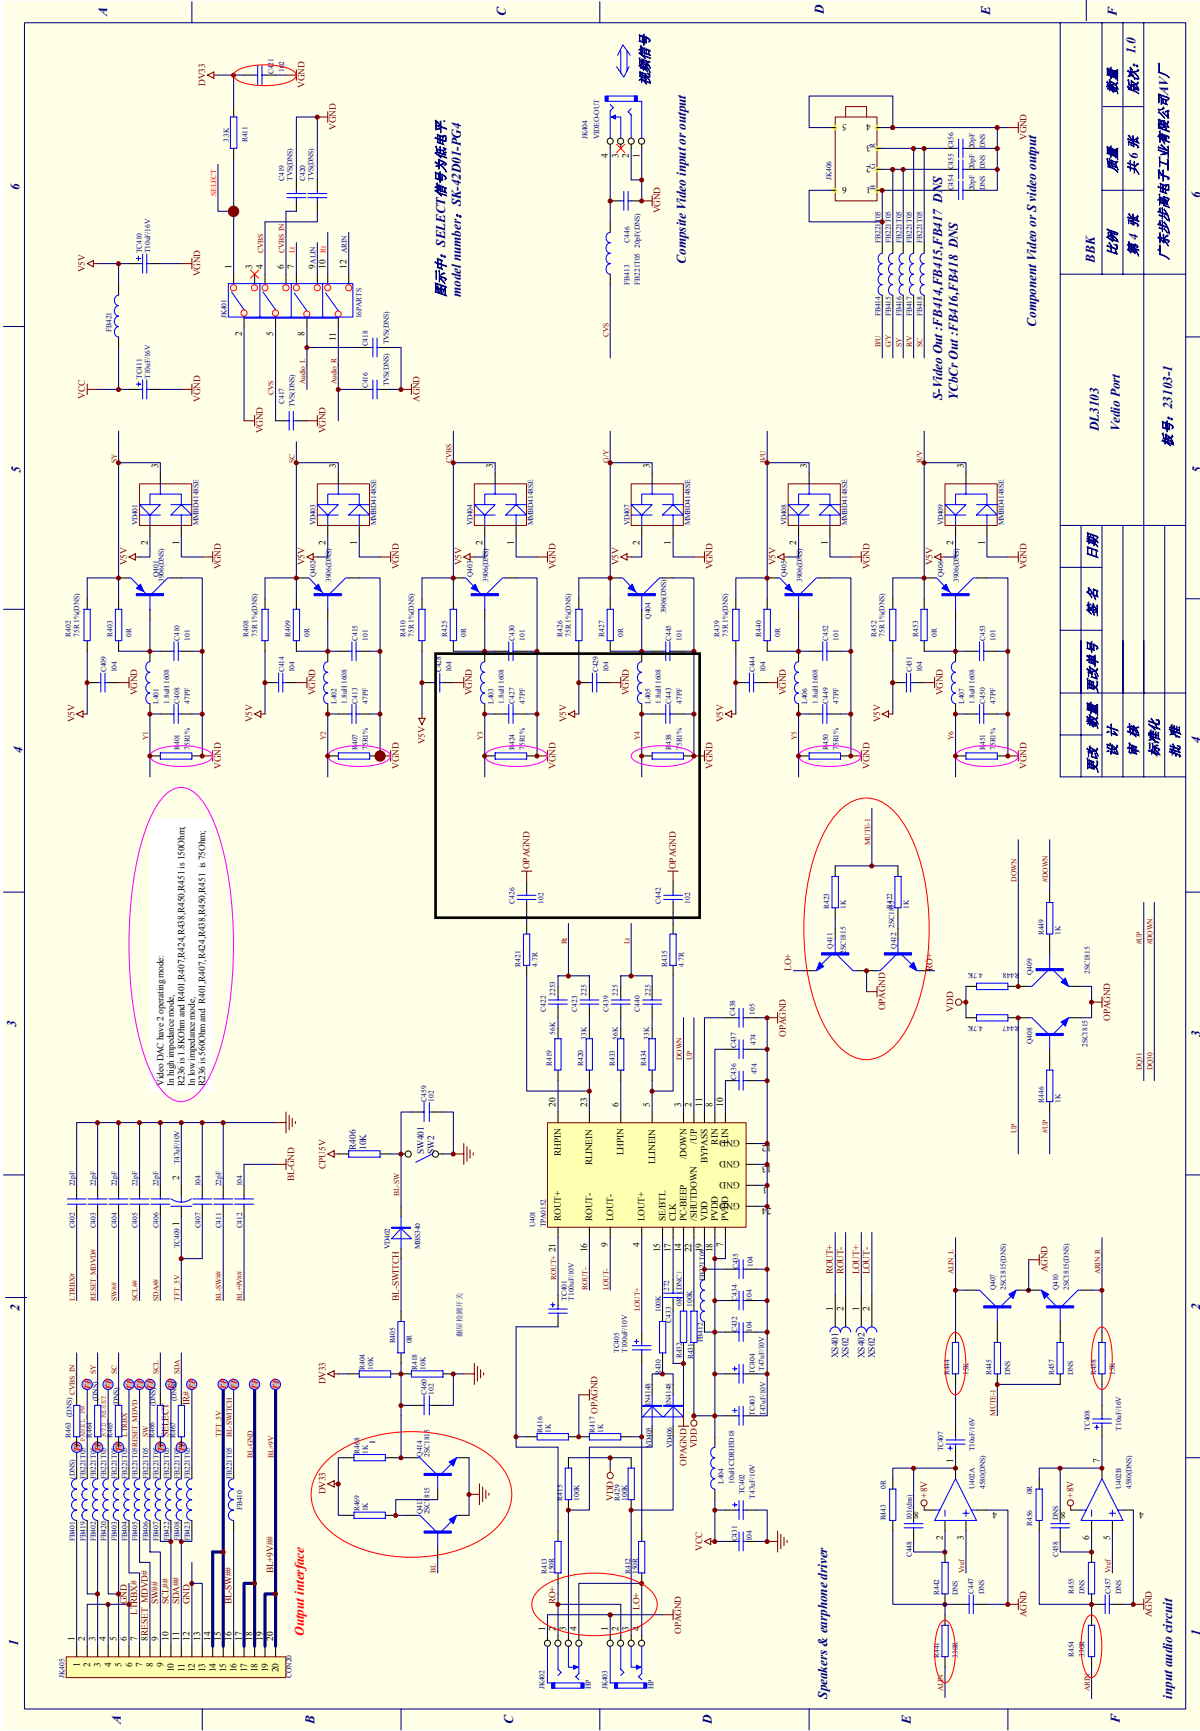

1 2 3 4 5 6

1 2 3 4 5 6

更改	数量	更改单号	签名	日期
设计	审核	标准	批准	
BBK		DL3103		
比例		Video Port		
第1张	质量	共6张		数量
	层次	1.0		
广东步步高电子有限公司AV厂				
型号: 23103-1				

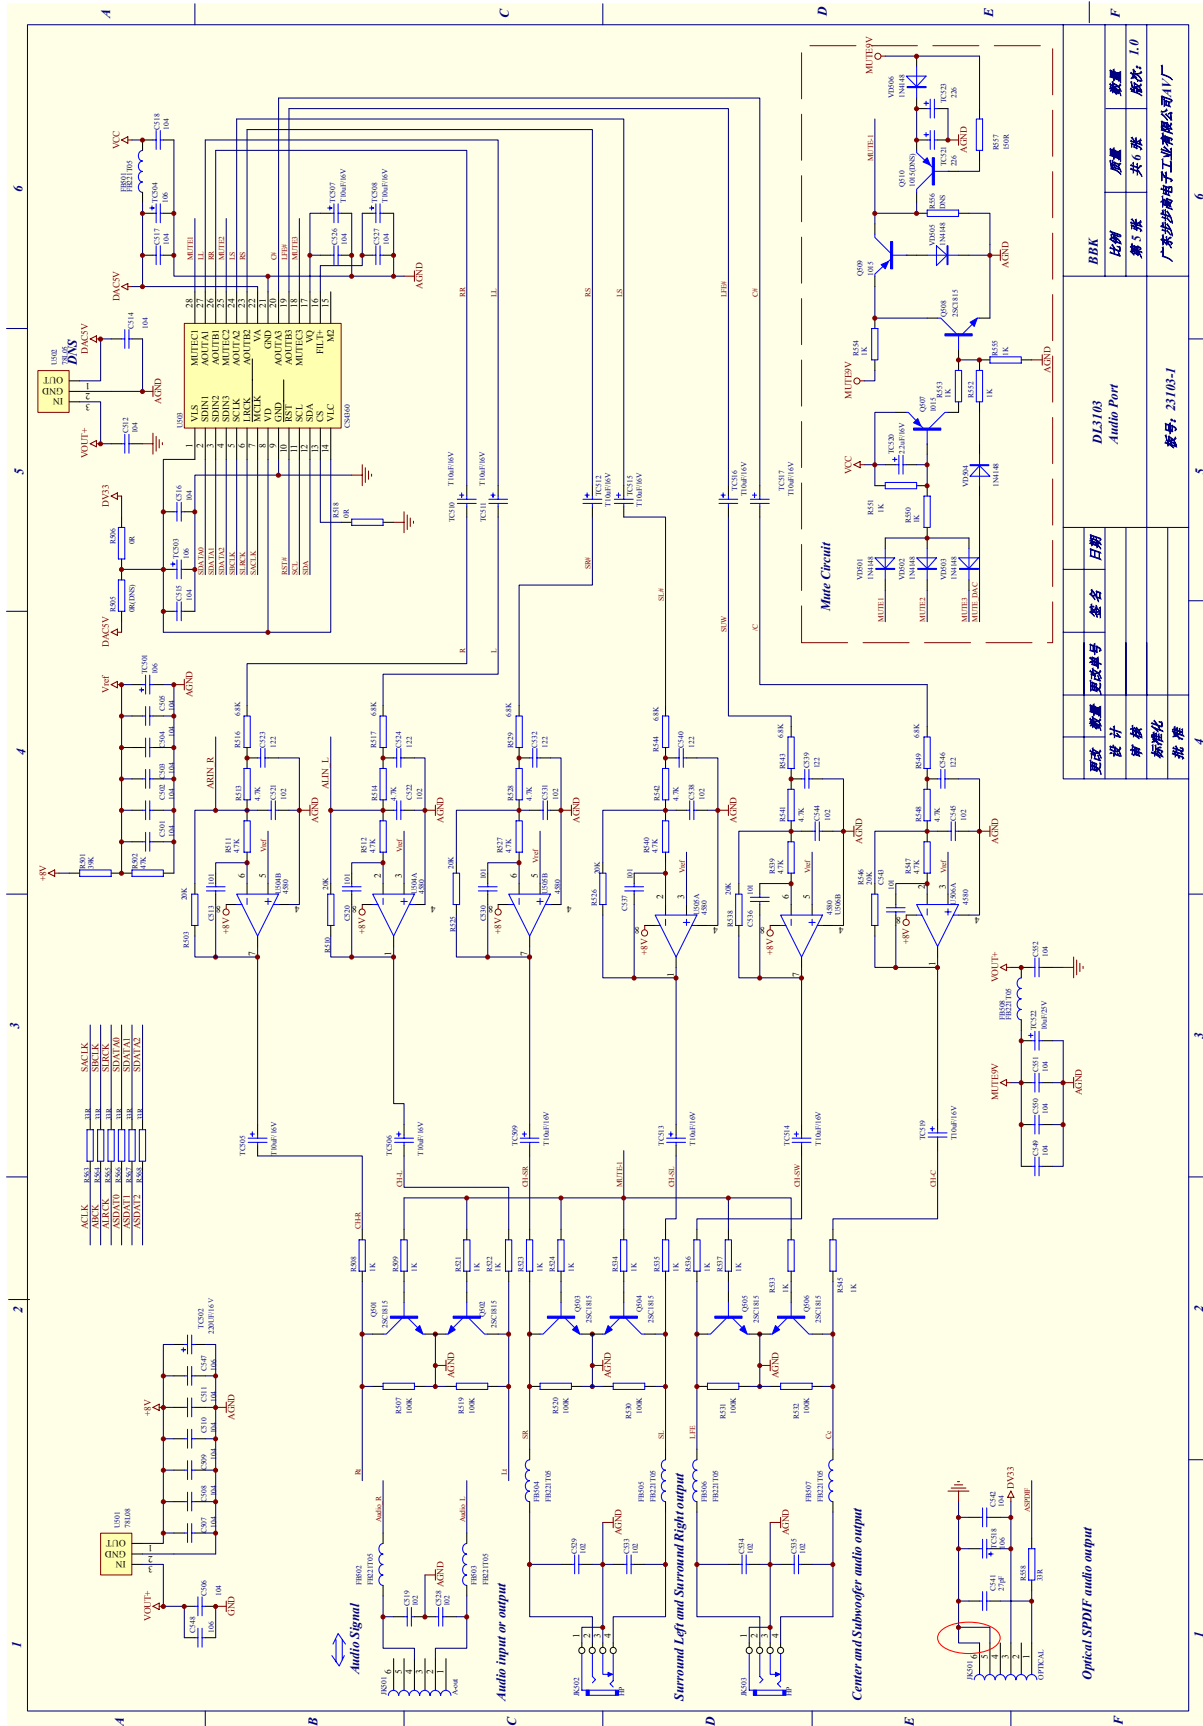

更改	设计	审核	批准	日期	签名	日期

更改单号	更改单号	更改单号	更改单号

比例	数量	比例	数量
第5张	共6张	第5张	共6张


BBK	比例	数量	比例
DL3108	第5张	共6张	第5张

DL3108  
Audio Port

编号: 23103-1

广州沙湾电子有限公司AV厂


DECODE BOARD

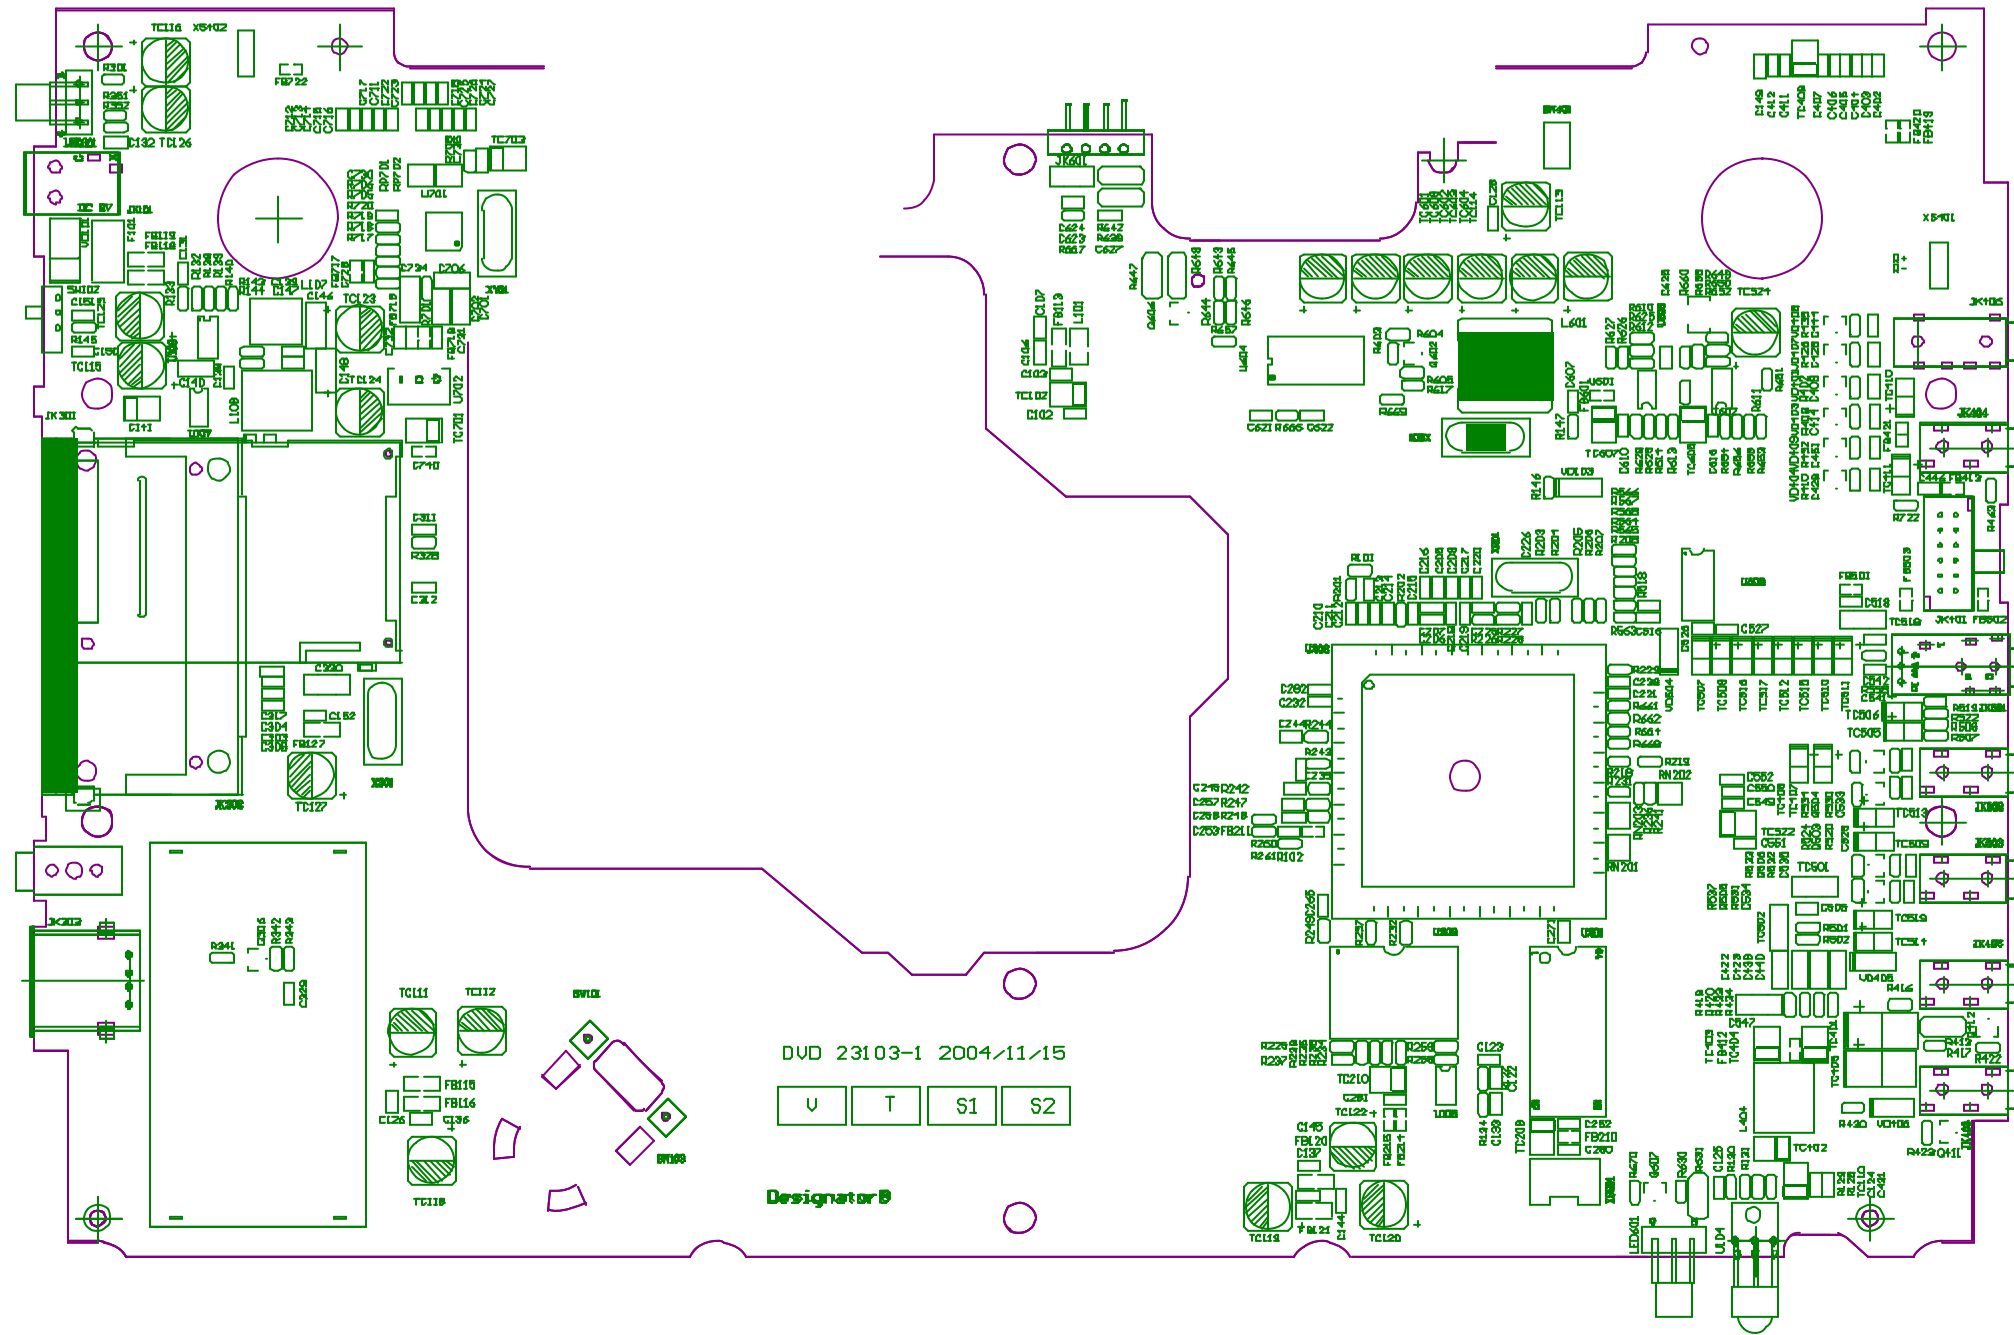







# BATTERY CHARGER

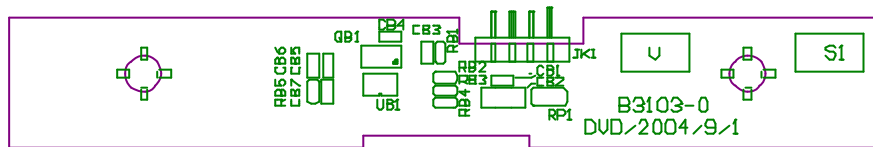

# MAIN FRONT PANEL

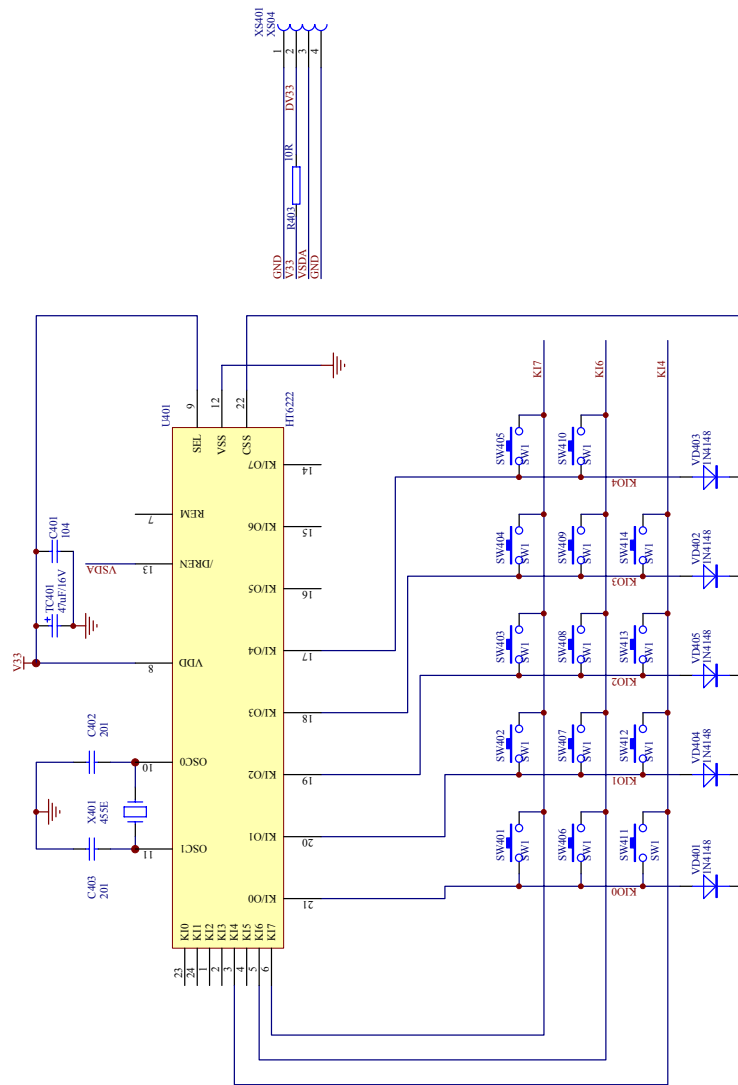


# MAIN FRONT PANEL

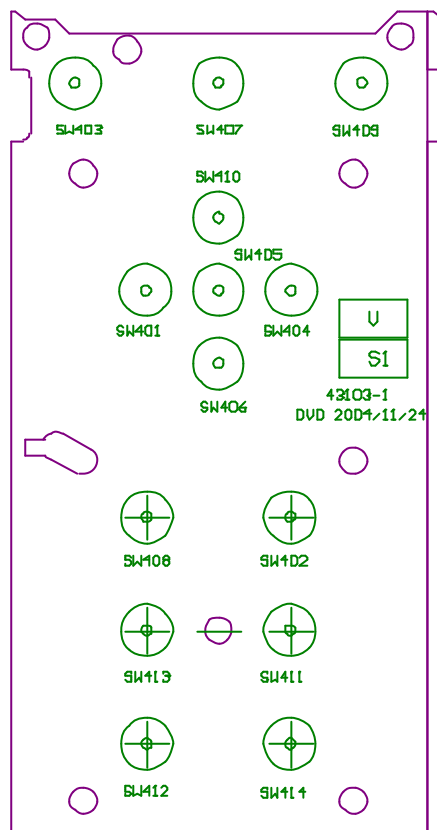






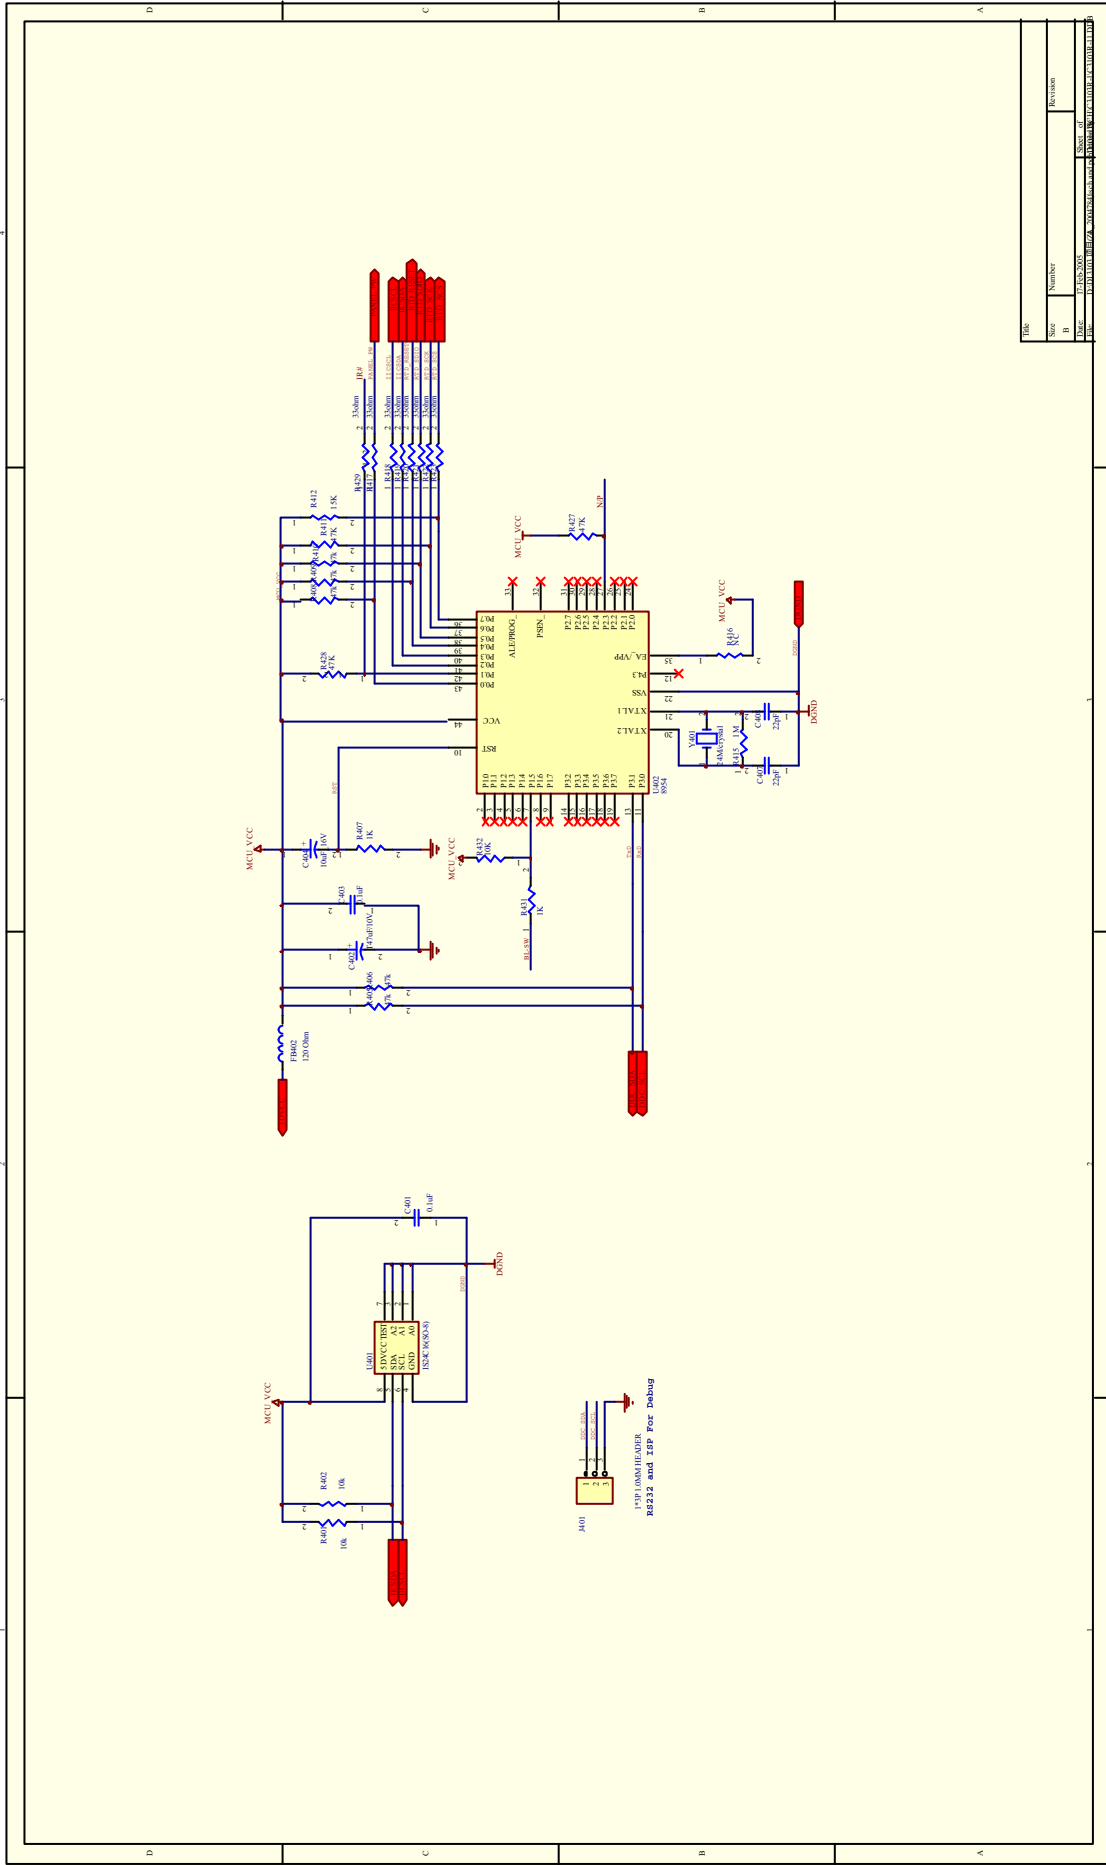






# LCD DRIVE BOARD

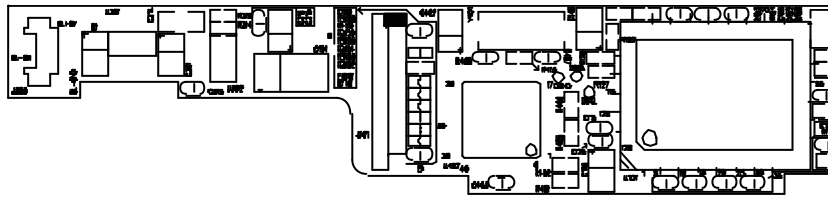

# BOOST BOARD

X478110VCS

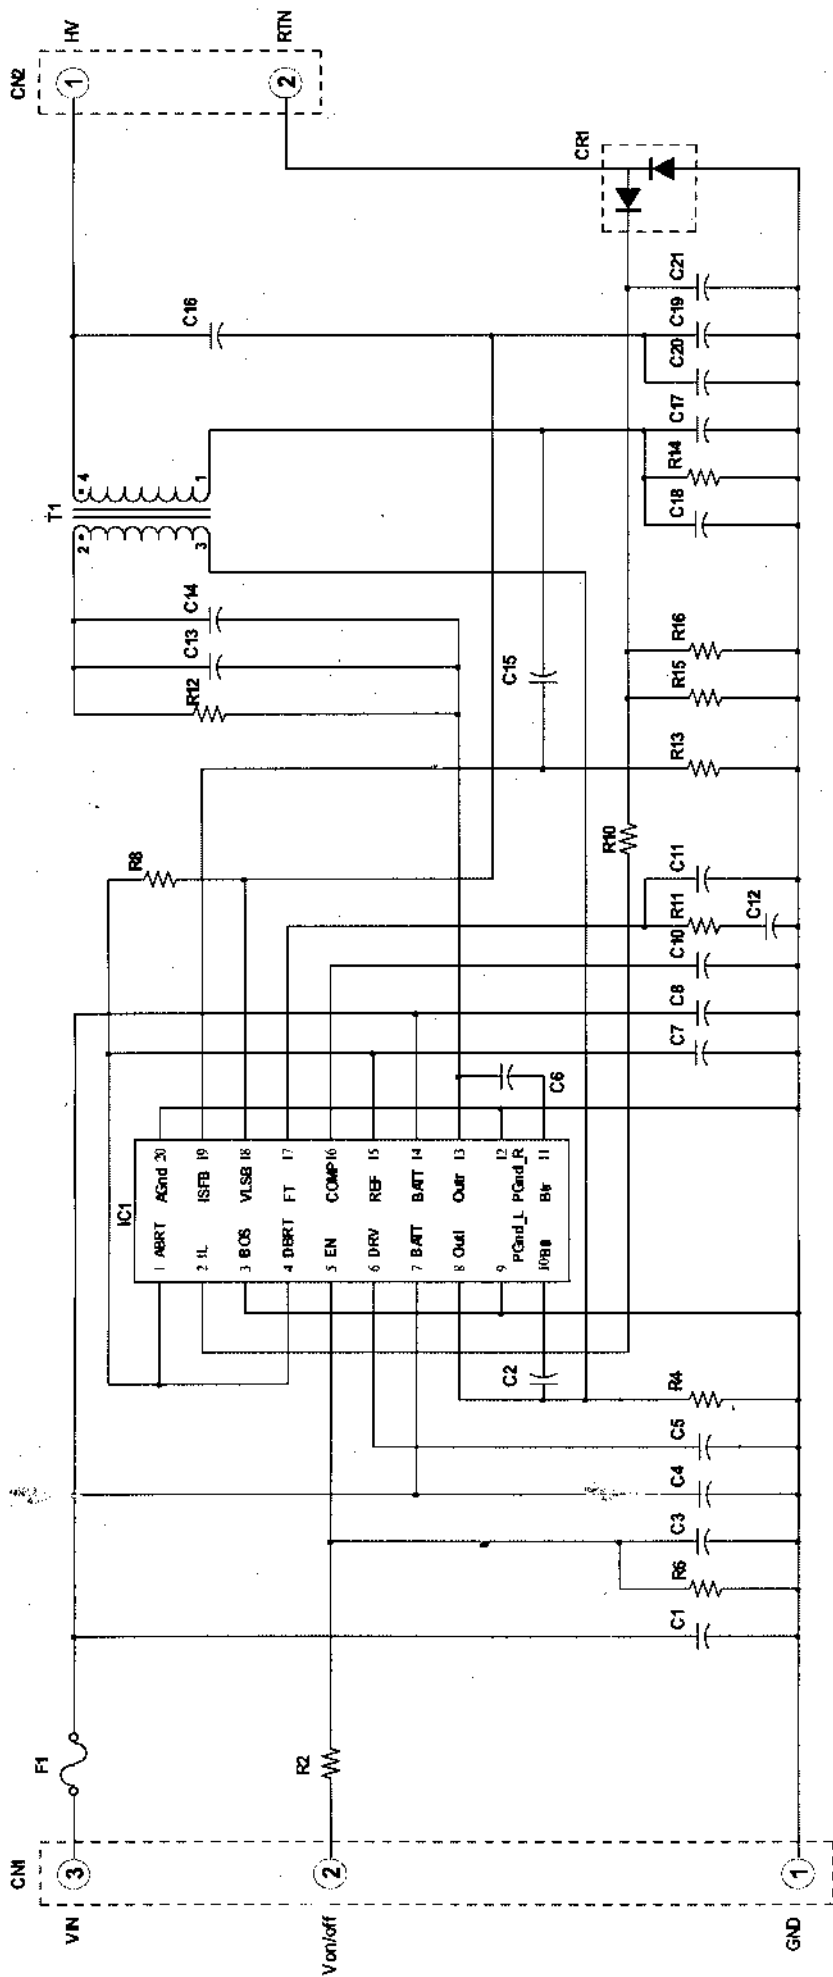


No.	圖號 - DWG.No.	名稱 - NAME	設計 - DESIGN	製圖 - DRAWING	繪圖 - CHECKED	承認 - APPVD	承製 - APPVD	內容 - DESCRIPTION	日期 REV DATE	設計 DISGN	承認 APV
		Jaxiong Shen									
		Solid Chen									
			日期 DATE	日期 DATE	日期 DATE	日期 DATE	日期 DATE	內容 - DESCRIPTION	日期 DATE	設計 DISGN	承認 APV
			11/30/03	11/30/03	/	/	/				
			材料 - MATERIAL	名稱 - TITLE	圖號 - DWG.No.	圖號 - DWG.No.	圖號 - DWG.No.				
			11/30/03	SCHEMATIC DIAGRAM	184X	XAD184NF	TUROANGLE PROJECTION				
			比例 SCALE	單位 UNIT	第三角法 THIRD ANGLE PROJECTION						
			/	mm							
			圖號 - DWG.No.	圖號 - DWG.No.	圖號 - DWG.No.	圖號 - DWG.No.	圖號 - DWG.No.				
			3DA01184X	3DA01184X	3DA01184X	3DA01184X	3DA01184X				
			備註 - REMARK	備註 - REMARK	備註 - REMARK	備註 - REMARK	備註 - REMARK				
			184X	184X	184X	184X	184X				
			日期 DATE	日期 DATE	日期 DATE	日期 DATE	日期 DATE				
			/	/	/	/	/				
			頁 - PAGE	頁 - PAGE	頁 - PAGE	頁 - PAGE	頁 - PAGE				
			1 / 1	1 / 1	1 / 1	1 / 1	1 / 1				


# BOOST BOARD

3KB01184X


Top Overlay

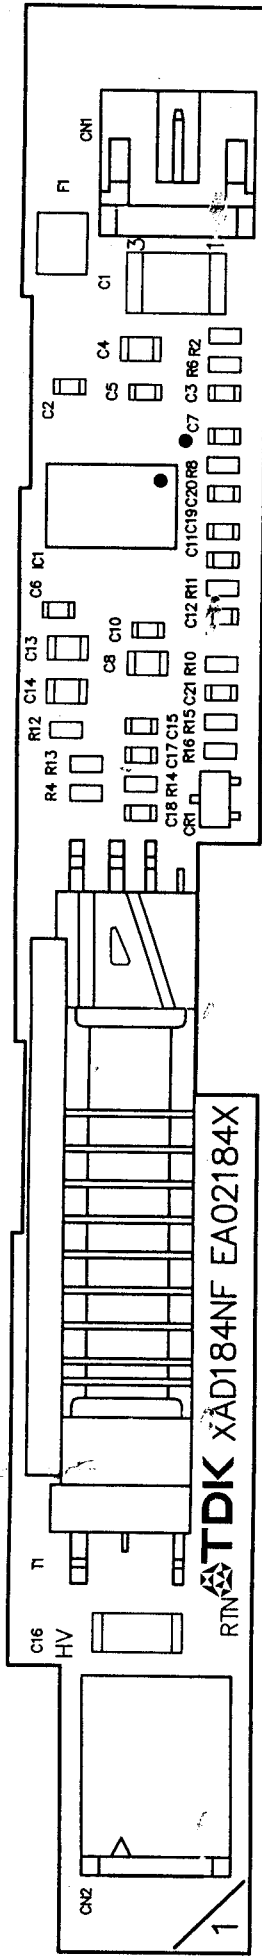

TopLayer

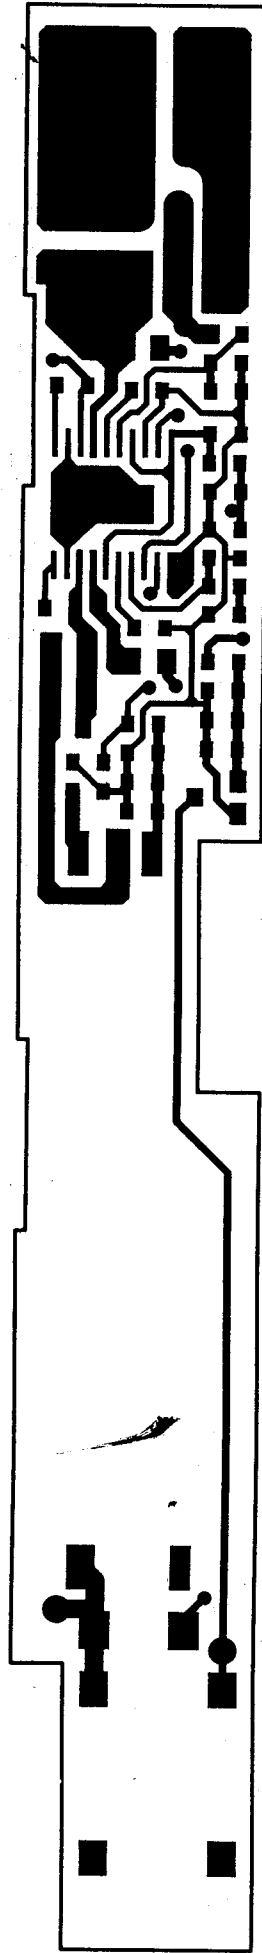

BottomLayer

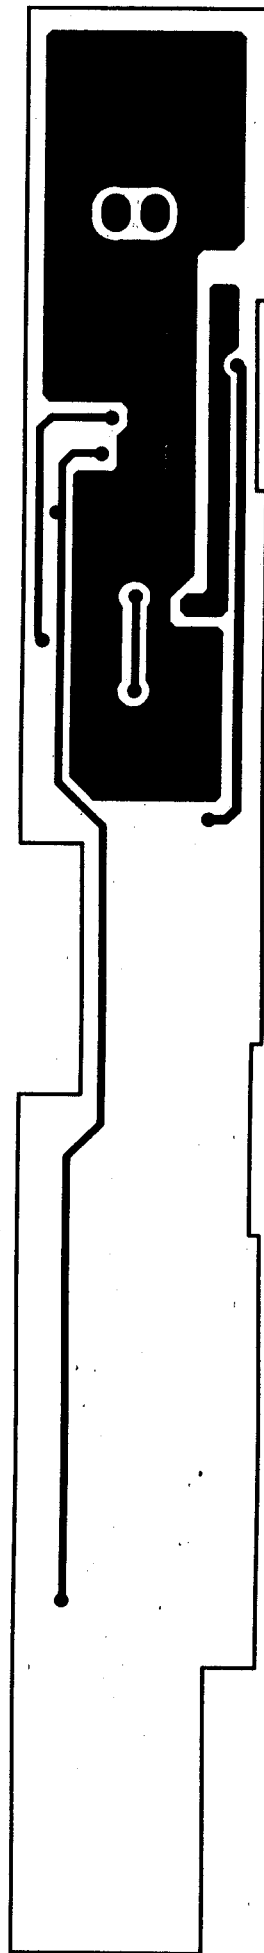

No.	圖號 · DWG.No.	名稱 · NAME	數量 · MATERIAL	處理 · TREATMENT	備考 · REMARK
設計 · DESIGN	Jiaxiang Shen	日期 · DATE	11/30/03	名稱 · TITLE	規格 · IDX CD
製圖 · DRAWING	Solid Chen	日期 · DATE	11/30/03	COMPONENT LOCATION	184X
檢圖 · CHECKED		日期 · DATE	/ /	型式	XAD184NF
承認 · APPVD		日期 · DATE	/ /	單位	mm
承認 · APPVD		日期 · DATE	/ /	圖樣 · DWG.No.	3KB01184X
版	REV	日期	DATE	第三角法 THIRD ANGLE PROJECTION	日期 · DATE
內容 · DESCRIPTION	內容 · DESCRIPTION	內容 · DESCRIPTION	內容 · DESCRIPTION	內容 · DESCRIPTION	頁 · PAGE
					1 / 1
TDK 廈門TDK有限公司 TDK XIAMEN CO.,LTD.					

# PARTS LIST

IDX. CD.		XAD184NF					
	184X						
PART NUMBER		DESCRIPTION	QUANT	ITEM NO.	MFRS.	INS.	
C1	C4532X5R1C226MT000N	CAPACITOR	1	IN27200303	TDK		
C2	C1608X7R1E103KT000N	OR	1	IN01605301	TDK		
	C1608X7R1H103KT000N			IN01603601	TDK		
C3	C1608X7R1E104KT000N	OR	1	IN01618702	TDK		
	C1608X7R1H104KT000N			IN01661801	TDK		
C4	C2012X7R1E105KT000N	OR	1	IN30626701	TDK		
	C2012X7R1C105KT000N			IN30652203	TDK		
C5	C1608X7R1E104KT000N	OR	1	IN01618702	TDK		
	C1608X7R1H104KT000N			IN01661801	TDK		
C6	C1608X7R1E103KT000N	OR	1	IN01605301	TDK		
	C1608X7R1H103KT000N			IN01603601	TDK		
C7	C1608Y5V1C105ZT000N	OR	1	IN30300701	TDK		
	C1608X5R1C105KT000N			IN30205102	TDK		
C8	C2012X7R1E105KT000N	OR	1	IN30626701	TDK		
	C2012X7R1C105KT000N			IN30652203	TDK		
C10	C1608X7R1E152KT000N	OR	1	IN01650801	TDK		
	C1608X7R1H152KT000N			IN01671801	TDK		
C11	C1608X7R1E103KT000N	OR	1	IN01605301	TDK		
	C1608X7R1H103KT000N			IN01603601	TDK		
C12	C1608Y5V1C105ZT000N	OR	1	IN30300701	TDK		
	C1608X5R1C105KT000N			IN30205102	TDK		
C13	C2012X7R1C474KT000N	OR	1	IN30602604	TDK		
	C2012X7R1E474KT000N			IN30608002	TDK		
C14	C2012X7R1C474KT000N	OR	1	IN30602604	TDK		
	C2012X7R1E474KT000N			IN30608002	TDK		
C15	C1608X7R1E104KT000N	OR	1	IN01618702	TDK		
	C1608X7R1H104KT000N			IN01661801	TDK		
C16	302R29N150JV4E	OR	1		JOHANSON		
	C4520C0G3F150JT0A0N				TDK		
C17	C1608X7R1E683KT000N	OR	1	NS13006	TKD		
	C1608X7R1H683KT000N			IN58801200	TDK		
C18	NA						
C19	C1608X7R1E562KT000N	OR	1	IN01674801	TDK		
	C1608X7R1H562KT000N			IN01670201	TDK		
C20	NA						
C21	C1608X7R1E103KT000N	OR	1	IN01605301	TDK		
	C1608X7R1H103KT000N			IN01603601	TDK		
R2	RC0603FRF10K	OR	1	NS06033	YAGEO		
	RMC16P1002F			NS06494	KAMAYA		
R4	RC0603FRF4.3K	OR	1	NS06165	YAGEO		
	RMC16P4301F			NS06552	KAMAYA		
				TITLE: ELECTRICAL PARTS LIST			
				MODEL: XAD184NF			
				DESIGNED	Jiaxiong Shen	DATE	01/30/04
				DRAWN	Jiaxiong Shen		01/30/04
				CHECKED			/ /
REV.	DATE	DESCRIPTION	DRAWN	APV.	APPVD.		/ /
TDK XIAMEN CO., LTD. POWER MFG. DEPT. 321~339, Tongji South RD., Jimei Dist., Xiamen, Fujian, P.R.China			DATE	APPVD.			/ /
				DWG. NO.	4CA01184X		PAGE
				/ /			1/2

**BOOST BOARD**

**PARTS LIST**

IDX. CD.		XAD184NF						
	184X							
PART NUMBER		DESCRIPTION	QUANT	ITEM NO.	MFRS.	INS.		
R6	RC0603FRF100K RMC16P1003F	OR RESISTOR	1	NS06028 NS06514	YAGEO KAMAYA			
R8	RC0603FRF300K RMC16P3003F	OR RESISTOR	1	NS06163 NS06527	YAGEO KAMAYA			
R10	RC0603FRF0R0 RMC16P0R00	OR RESISTOR	1	NS06168 NS06481	YAGEO KAMAYA			
R11	RC0603FRF100K RMC16P1003F	OR RESISTOR	1	NS06028 NN06541	YAGEO KAMAYA			
R12	RC0603FRF1K RMC16P1001F	OR RESISTOR	1	NS06020 NS06502	YAGEO KAMAYA			
R13	RC0603FRF300K RMC16P3003F	OR RESISTOR	1	NS06163 NS06527	YAGEO KAMAYA			
R14	RC0603FRF4.3K RMC16P4301F	OR RESISTOR	1	NS06165 NS06552	YAGEO KAMAYA			
R15	RC0603FRF200R RMC16P2000F	OR RESISTOR	1	NS06219 NS06584	YAGEO KAMAYA			
R16	RC0603FRF2K RMC16P2001F	OR RESISTOR	1	NS06113 NS06531	YAGEO KAMAYA			
%	T1	TDK 10UI-X12	TRANSFORMER	1		GUANN JYE		
%	IC1	MP1010BEM MP1015EM	IC	1	NS35008 NS35004	MPS		
&	PB1	3EA02184X 02	P.W.B.	1		MILKY-WAY CCTC XINE		
	F1	CCP2E63 TE	FUSE	1		KOA		
&	CN1	8680S-0300	CONNECTOR	1		E&T		
&	CN2	4100-02 SM02B-BHSS-1-TB	CONNECTOR	1		E&T ACES		
		4EU02184X	CABLE	1		TDK		
CR1	1SS226(TE85L) MA157-TX	DIODE	1		TOSHIBA PANASONIC			
Packaging Parts List Refer to 4CC12073X Packaging Darwing Refer to 4LC12073X								
				TITLE: ELECTRICAL PARTS LIST				
				MODEL: XAD184NF				
				DESIGNED		DATE		
				DRAWN		/ /		
				CHECKED		/ /		
REV.	DATE	DESCRIPTION	DRAWN	APV.	APPVD.	/ /		
TDK XIAMEN CO., LTD. POWER MFG. DEPT. 321~339, Tongji Sounth RD., Jimei Dist., Xiamen, Fujian, P.R.China			DATE	APPVD.	/ /			
			/ /	DWG. NO.	4CA01184X		PAGE	
							2/2	

# 9.DVDPX-180S MATERIAL

## DL3103DC MATERIAL LIST

### 1. CAR ADAPTER

MATERIAL COI	MATERIAL NAME	SPECIFICATIONS	UNIT	ANT	LOCATION
10303	METAL OXIDE FILM RESISTOR	1/2W0.1Ω±5% SHAPED VERTICAL 5	PCS	2	R1,R7
0090286	SMD RESISTOR	1/16W62Ω±5% 0603	PCS	1	R10
0090181	SMD RESISTOR	1/16W 100Ω ±5% 0603	PCS	1	R11
0090017	SMD RESISTOR	1/16W 2.2K ±5% 0603	PCS	1	R14
0010304	METAL OXIDE FILM RESISTOR	1W330Ω±5% SHAPED VERTICAL 5	PCS	1	R8
90014	SMD RESISTOR	1/16W 1K ±5% 0603	PCS	3	R12,R15,R16
0090050	SMD RESISTOR	1/10W 1K ±5% 0805	PCS	2	R4,R6
0090016	SMD RESISTOR	1/16W 1.5K ±5% 0603	PCS	1	R9
0090178	SMD RESISTOR	1/10W 3.6K ±5% 0805	PCS	1	R5
0090022	SMD RESISTOR	1/16W 8.2K ±5% 0603	PCS	1	R13
0090480	PRECISION SMD RESISTOR	1/10W 24K±1% 0805	PCS	1	R3
0310029	SMD CAPACITOR	50V 102 ±10% 0805	PCS	1	C9
310144	SMD CAPACITOR	50V 104 ±10% 0805	PCS	4	C4,C5,C8,C10
0310102	SMD CAPACITOR	50V 471 ±10% 0805	PCS	1	C6
0310234	SMD CAPACITOR	16V 105 +80%-20% 0603	PCS	1	C13
0310654	SMD CERAMIC CAPACITOR	25V 106 +80%-20% Y5V 1206	PCS	2	C12,C14
0260370	CD	CD11C 35V100U±20%6.3×11 2.5	PCS	2	C1,C2
260168	CD	CD11 25V1000U±20%10×20 5	PCS	1	C3
0780085	SMD TRIODE	8050D	PCS	1	V1
0780129	SMD TRIODE	8550D	PCS	1	V2
0881701	IC	MC34063A SOP	PCS	1	U1
0881867	IC	FDS9435A SOP	PCS	1	U2
0882105	IC	LM393 SO8	PCS	1	U3
0620025	RADIATION DIODE	3R 4SD RED	PCS	1	VD2
390251	VERTICAL INDUCTOR	3UH±15% 12×8.5 5mm	PCS	1	L1
0410131	INDUCTOR COIL	85UH±10% Φ18×8Φ0.8	PCS	1	L2
700007	SMD DIODE	1N4148	PCS	2	VD4,VD5
0680041	SCHOTTKY DIODE	SB560 SHAPED VERTICAL 5	PCS	1	VD1
0700004	SMD VOLTAGE REGULATOR DIODE	5.1V ±5% 1/2W	PCS	1	VD3
1632170	PCB	D333-2	PCS	1	
5070678	SELF-SEALED PLASTIC BAG FOR ENVIRONMENTAL PROTECTION (WITH HOLE)	120×260×0.05 PE	PCS	1	
2140139	POWER CORD	2P2.5m WITH Φ4.0 DC PLUG	PCS	1	P+,P-
5232167	FIBRE TUBING	Φ1 WHITE	PCS	0.024	
3031156	UPPER COVER OF CAR POWER CONNECTION CASE	AK008 BLACK	PCS	1	
3040843	LOWER COVER OF CAR POWER CONNECTION CASE	AK008 BLACK	PCS	1	
3870754	WASHER	AK008	PCS	1	
3870755	TOUCH POINT	AK008	PCS	1	
3630186	SHRAPNEL	AK008	PCS	2	
3810034	SPRING	AK008	PCS	1	
3870756	FUSE HOLDER	AK008	PCS	1	
3060299	TOUCH POINT COVER	AK008 BLACK	PCS	1	
2110002	LEAD	24# 30mm RED	PCS	2	
2110004	LEAD	24# 40mm BLACK	PCS	1	
2300018	FUSE HOLDER	T3.15AL 250V ( VDE/UL )	PCS	1	
5232168	DUST-PROOF NET	AK008 BLACK	PCS	4	

### 2. BATTERY PROTECTION BOARD

MATERIAL COI	MATERIAL NAME	SPECIFICATIONS	UNIT	ANT	LOCATION
0090014	SMD RESISTOR	1/16W 1K ±5% 0603	PCS	4	RB1,RB3,RB4,RB5
0090233	SMD RESISTOR	1/16W 4.7MΩ ±5% 0603	PCS	1	RB2
1050008	SMD THERMISTOR	NTC 10K±5% B:3950K 0805	PCS	1	RP1
0310543	SMD CAPACITOR	50V 104±10% 0603	PCS	4	CB1,CB5,CB6,CB7
0310219	SMD CAPACITOR	16V 106 +80%-20% 1206	PCS	1	CB2
0310379	SMD CAPACITOR	25V 474 +80%-20% 0603	PCS	2	CB3,CB4
790040	FIELD EFFECT TUBE	UPA1870 SSOP	PCS	1	QB1

0881535	IC	S8232 SOP	PCS	1	UB1
1860067	POWER CONNECTOR	4P 2.5mm DC-C10399	PCS	1	JK1
1631816	PCB	B3103-0	PCS	1	

### I. MAIN PANEL

MATERIAL COI	MATERIAL NAME	SPECIFICATIONS	UNIT	ANT	LOCATION
0090001	SMD RESISTOR	1/16W 0Ω ±5% 0603	PCS	1	R403
0310048	SMD CAPACITOR	50V 151 ±5% NPO 0603	PCS	2	C402,C403
0310084	SMD CAPACITOR	50V 104 +80%-20% 0603	PCS	1	C401
0310376	SMD TANTALUM CAPACITOR	NRS10V47U±20%3528(B2)	PCS	1	TC401
0700001	SMD DIODE	LS4148	PCS	3	VD401,VD402,VD403
0700002	SMD DIODE	LL4148	PCS	3	VD401,VD402,VD403
700007	SMD DIODE	1N4148	PCS	3	VD401,VD402,VD403
700056	SMD DUAL DIODE	MMBD4148SE SOT-23	PCS	9	Q401~Q409
0970003	CERAMIC RESONATOR	455E	PCS	1	X401
0881587	IC	PT2222A SOP	PCS	1	U401
1940150	SOCKET	4P 1.0mm SMD	PCS	1	XS401
1632039	PCB	43103-1	PCS	1	

### 3. LCD DRIVE BOARD

MATERIAL COI	MATERIAL NAME	SPECIFICATIONS	UNIT	ANT	LOCATION
0090001	SMD RESISTOR	1/16W 0Ω ±5% 0603	PCS	7	FB201,FB203,FB204,R203,R225,R243,R218
90304	PRECISION SMD RESISTOR	1/16W 10K±1% 0603	PCS	1	R204串联一个电阻
0090677	PRECISION SMD RESISTOR	1/16W 7.5k ±1% 0603	PCS	2	R207,R234
0090005	SMD RESISTOR	1/16W 33Ω ±5% 0603	PCS	24	R101,R102,R106,R118~R122,R128,R311,R312,R313,R320~R323,R417~R423,R429
0090006	SMD RESISTOR	1/16W 75Ω ±5% 0603	PCS	4	R108,R109,R123,R431
0090181	SMD RESISTOR	1/16W 100Ω ±5% 0603	PCS	6	R111,R112,R116,R124,R126,R127
90609	PRECISION SMD RESISTOR	1/16W 100Ω ±1% 0603	PCS	3	R220,R223,R238
0090610	PRECISION SMD RESISTOR	1/16W 300Ω ±1% 0603	PCS	1	R232
0090009	SMD RESISTOR	1/16W 330Ω ±5% 0603	PCS	1	R213
0090541	PRECISION SMD RESISTOR	1/16W 2.2K ±1% 0603	PCS	1	R233
0090612	PRECISION SMD RESISTOR	1/16W 510Ω ±1% 0603	PCS	1	R227
0090613	PRECISION SMD RESISTOR	1/16W 620Ω ±1% 0603	PCS	2	R219,R222
0090014	SMD RESISTOR	1/16W 1K ±5% 0603	PCS	6	R103,R310,R314,R315,R407,R324
0090110	PRECISION SMD RESISTOR	1/16W 2K ±1% 0603	PCS	2	R104,R305
0090674	PRECISION SMD RESISTOR	1/16W 30Ω ±1% 0603	PCS	3	R206,R237,R209
0090675	PRECISION SMD RESISTOR	1/16W 430Ω ±1% 0603	PCS	2	R216,R235
0090676	PRECISION SMD RESISTOR	1/16W 820Ω ±1% 0603	PCS	4	R205,R236,R208,R231
0090549	PRECISION SMD RESISTOR	1/16W 3k ±1% 0603	PCS	5	R306,R210,R229,R217,R224
90631	PRECISION SMD RESISTOR	1/16W 1.6K ±1% 0603	PCS	2	R219,R222
0090185	SMD RESISTOR	1/16W 6.2K ±5% 0603	PCS	1	R240
0090023	SMD RESISTOR	1/16W 10K ±5% 0603	PCS	6	R113,R115,R202,R401,R402,R432
0090024	SMD RESISTOR	1/16W 15K ±5% 0603	PCS	3	R226,R241,R412
0090029	SMD RESISTOR	1/16W 47K ±5% 0603	PCS	8	R405,R406,R408~R411,R427,R428
0090289	PRECISION SMD RESISTOR	1/16W100K±1% 0603	PCS	5	R214,R239,R201,R244,R245
0090627	PRECISION SMD RESISTOR	1/16W 619K±1% 0603	PCS	1	R204
0090109	SMD RESISTOR	1/16W 1MΩ ±5% 0603	PCS	3	R105,R117,R415
0100019	SMD RESISTOR NETWORKS	1/16W33Ω ±5% 8P	PCS	5	RP101,RP102,RP301,RP302,RP303

0160156	SMD ROTATED POTENTIOMETER	W203-50K±20%	PCS	1	VR201
0310185	SMD CAPACITOR	50V 5P ±0.25P NPO 0603	PCS	3	C163,C164,C172
310210	SMD CAPACITOR	50V 12P ±5% NPO 0603	PCS	2	C147,C175
0310043	SMD CAPACITOR	50V 22P ±5% NPO 0603	PCS	10	C106,C108,C145,C165~C168,C173,C407,C408
0310051	SMD CAPACITOR	50V 331 ±5% NPO 0603	PCS	1	C211
0310205	SMD CAPACITOR	50V 473 ±10% 0603	PCS	3	C156,C158,C160
310543	SMD CAPACITOR	50V 104±10% 0603	PCS	58	C107,C109,C110,C112~C125,C127,C142,C143,C148~C155,C157,C161,C206~C210,C217~C220,C226~C231,C302,C305,C308~C311,C313,C316,C318,C321,C401,C403,R304
0310658	SMD CAPACITOR	25V 105 ±10% 0805	PCS	4	C213,C221,C222,C223
0310659	SMD CAPACITOR	25V 225 ±10% 0805	PCS	4	C214,C216,C224,C225
0310219	SMD CAPACITOR	16V 106 +80%-20% 1206	PCS	9	C205,C232,C202,C303,C306,C307,C314,C317,C319
0310577	SMD CERAMIC CAPACITOR	10V 226 +80% -20% 1206	PCS	1	C233
310660	SMD CERAMIC CAPACITOR	16V 226 ±20% 1210	PCS	4	C1,C204,C144,C146
0310390	SMD TANTULUM CAPACITOR	16V10U±20% 3216	PCS	2	C174,C404
0310376	SMD TANTULUM CAPACITOR	NRS10V47U±20%3528(B2)	PCS	6	C301,C304,C402,C111,C126,C201
0310667	SMD CAPACITOR	50V 223 ±10% X7R 0603	PCS	1	R212
310375	SMD TANTULUM CAPACITOR	16V100UF±20% 7343(D)	PCS	1	C101
0310548	SMD TANTULUM CAPACITOR	6.3V100UF±20% 3528(B2)	PCS	2	C315,C320
0390259	SMD MAGNETIC BEADS	FCM2012-120T2A	PCS	7	FB107,FB202,FB301~FB303,FB305,FB402
0390302	SMD MAGNETIC BEADS	MGHB1608S102	PCS	22	FB129,FB108~FB110,FB114~FB125,FB127,FB103,FB304,L101,L102,L103
0390357	SMD MAGNETIC CORE INDUCTOR	4.7UH±30% CDRH2D18/LD	PCS	1	L201
0680061	SMD SCHOTTKY DIODE	SB07-03C SOT-23	PCS	1	D201
0680042	SMD SCHOTTKY DIODE	BAT54S SOT-23	PCS	3	D202,D204,D205
700155	SMD VOLTAGE REGULATOR DIODE	7.5V ±5% 0.2W SOD-323	PCS	1	D206
0700143	SMD VOLTAGE REGULATOR DIODE	16V 200mW SOD-323	PCS	1	D203
0700056	SMD DUAL DIODE	MMBD4148SE SOT-23	PCS	5	D101~D105
0882341	IC	S-L2980A50MC SOT-23-5	PCS	1	U202
0882342	IC	RTD2011 QFP	PCS	1	U101
0881388	IC	24C16 SOP	PCS	1	U401
0881914	IC	RT9701CB SOT25	PCS	1	U303
0881182	IC	LM1117MP-ADJ SOT-223	PCS	2	U301,U302
0882426	IC	ADP1610 MSOP	PCS	1	U201
0882344	IC	AD8565 SC70	PCS	1	U203
0960235	SMD CRYSTAL OSCILLATOR	24.576MHz 49-S	PCS	1	Y101
0960246	SMD CRYSTAL OSCILLATOR	24.00MHz ±20PPM 49-S	PCS	1	Y401
1940138	CABLE SOCKET	30P 0.5mm SMD WITH CLASP	PCS	2	J301,J302
1940227	SOCKET	3P 1.25mm SMD	PCS	1	J303
1940237	SOCKET	20P 0.8mm SMD	PCS	2	J101,J102
900372	SOFTWARE PROGRAM EPROM	ROM3103-0A	PCS	1	
1632014	PCB	C3103R-1	PCS	1	

#### 4. DECODE BOARD

MATERIAL CODE	MATERIAL NAME	SPECIFICATIONS	UNIT	ANTI	LOCATION
---------------	---------------	----------------	------	------	----------



0090001	SMD RESISTOR	1/16W 0Ω ±5% 0603	PCS	40	R104~R106,R226,R228,R232,R239,R244,R249,R302,R303,R403,R405,R409,R425,R427,R440,R453,R506,R518,R614,R629,R655,R656,R661,R662,R701,R712,FB124,R722,R317,R338,R664,R668,R307,R309,FB117,FB126,FB721,FB722
0090536	SMD RESISTOR	1/8W0.27Ω±5% 1206	PCS	5	R638~R642
0090272	SMD RESISTOR	1/16W1Ω±5% 0603	PCS	7	R107~R109,R112,R113,R121,R122
0090106	SMD RESISTOR	1/16W 4.7Ω ±5% 0603	PCS	5	FB202,R114,R115,R421,R435
0090003	SMD RESISTOR	1/16W 10Ω ±5% 0603	PCS	2	R130,R609
0090005	SMD RESISTOR	1/16W 33Ω ±5% 0603	PCS	33	R136,R209,R214~R216,R218,R219,R223,R230,R231,R236,R240,R241,R254,R257~R261,R349,R350,R558,R563~R568,R705,R706,R709,FB213,R213
0090237	SMD RESISTOR	1/16W 39Ω ±5% 0603	PCS	4	R715,R716,R314,R315
0090230	SMD RESISTOR	1/16W 47Ω ±5% 0603	PCS	2	R101,R103
0090316	PRECISION SMD RESISTOR	1/16W75Ω±1% 0603	PCS	7	R401,R407,R424,R438,R450,R451,R710
0090181	SMD RESISTOR	1/16W 100Ω ±5% 0603	PCS	3	R129,R310,R325
90135	SMD RESISTOR	1/8W 100Ω ±5% 1206	PCS	2	R647,R648
0090232	SMD RESISTOR	1/16W 150Ω ±5% 0603	PCS	1	R128
0090126	SMD RESISTOR	1/8W 150Ω ±5% 1206	PCS	2	R412,R413
0090009	SMD RESISTOR	1/16W 330Ω ±5% 0603	PCS	5	R301,R441,R454,R508,R522
0090011	SMD RESISTOR	1/16W 470Ω ±5% 0603	PCS	2	R633,R635
0090488	SMD RESISTOR	1/8W 470Ω±5% 1206	PCS	2	R621,R631
0090249	SMD RESISTOR	1/16W 510Ω ±5% 0603	PCS	2	R229,R670
0090013	SMD RESISTOR	1/16W 680Ω ±5% 0603	PCS	4	R127,R134,R714,R630
90016	SMD RESISTOR	1/16W 1.5K ±5% 0603	PCS	2	R312,R658
0090610	PRECISION SMD RESISTOR	1/16W 300Ω ±1% 0603	PCS	1	R713
0090014	SMD RESISTOR	1/16W 1K ±5% 0603	PCS	29	R208,R210,R345,R416,R417,R446,R449,R509,R521,R523,R524,R533~R537,R545,R552,R553,R555,R602,R342,R422,R423,R357,R147,R468,R469,R669
0090148	SMD RESISTOR	1/10W 510Ω ±5% 0805	PCS	1	R554
90543	PRECISION SMD RESISTOR	1/16W1k ±1% 0603	PCS	4	R141,R612,R650,R652
0090171	SMD RESISTOR	1/8W 1K ±5% 1206	PCS	1	R608
0090597	PRECISION SMD RESISTOR	1/16W1.4k ±1% 0603	PCS	1	R625
0090236	SMD RESISTOR	1/16W 1.8K ±5% 0603	PCS	1	R142
0090110	PRECISION SMD RESISTOR	1/16W 2K ±1% 0603	PCS	4	R611,R627,R651,R660
90541	PRECISION SMD RESISTOR	1/16W 2.2K ±1% 0603	PCS	1	R657
0090549	PRECISION SMD RESISTOR	1/16W 3k ±1% 0603	PCS	5	R140,R623,R626,R659,R411
0090019	SMD RESISTOR	1/16W 4.7K ±5% 0603	PCS	27	R211,R234,R235,R237,R238,R447,R448,R511~R514,R527,R528,R539~R542,R547,R548,R603,R613,R617,R622,R628,R653,R654,R708
0090534	PRECISION SMD RESISTOR	1/16W4.75K ±1% 0603	PCS	1	R610
0090598	PRECISION SMD RESISTOR	1/16W6.2k ±1% 0603	PCS	1	R649
0090021	SMD RESISTOR	1/16W 6.8K ±5% 0603	PCS	6	R516,R517,R529,R543,R544,R549

0090023	SMD RESISTOR	1/16W 10K ±5% 0603	PCS	40	R102,R110,R119,R124,R125,R220,R245,R250,R319~R324,R328,R344,R601,R604~R607,R618~R620,R624,R636,R721,R337,R404,R406,R418,R341,R221,R331,R340,R353,R354,R355,R550,R551
0090304	PRECISION SMD RESISTOR	1/16W 10K±1% 0603	PCS	4	R138,R143,R615,R616
0090024	SMD RESISTOR	1/16W 15K ±5% 0603	PCS	4	R201,R246,R444,R458
0090188	SMD RESISTOR	1/16W 18K ±5% 0603	PCS	2	R247,R637
0090025	SMD RESISTOR	1/16W 20K ±5% 0603	PCS	11	R111,R118,R120,R248,R146,R503,R510,R525,R526,R538,R546
0090098	PRECISION SMD RESISTOR	1/16W20K±1% 0603	PCS	1	R139
0090490	PRECISION SMD RESISTOR	1/16W 22K±1% 0603	PCS	2	R645,R646
90481	PRECISION SMD RESISTOR	1/16W 30K±1% 0603	PCS	1	R144
0090028	SMD RESISTOR	1/16W 33K ±5% 0603	PCS	6	R420,R434,R311,R313,C326,C329
0090224	SMD RESISTOR	1/16W 3.9K ±5% 0603	PCS	1	R501
0090029	SMD RESISTOR	1/16W 47K ±5% 0603	PCS	1	R634
0090184	SMD RESISTOR	1/16W 4.3K ±5% 0603	PCS	1	R502
90192	SMD RESISTOR	1/16W 51K ±5% 0603	PCS	1	R132
0090030	SMD RESISTOR	1/16W 56K ±5% 0603	PCS	2	R419,R433
0090193	SMD RESISTOR	1/16W 82K ±5% 0603	PCS	2	R346,R330
0090034	SMD RESISTOR	1/16W 100K ±5% 0603	PCS	19	R116,R123,R133,R137,R202,R227,R415,R429~R431,R507,R519,R520,R530,R531,R532,R704,R304,R707
0090243	SMD RESISTOR	1/16W 1.5MΩ ±5% 0603	PCS	1	R666
90201	SMD RESISTOR	1/16W 220K ±5% 0603	PCS	1	R632
0090212	SMD RESISTOR	1/16W 750K ±5% 0603	PCS	1	R224
0090109	SMD RESISTOR	1/16W 1MΩ ±5% 0603	PCS	1	R326
0100019	SMD RESISTOR NETWORKS	1/16W33Ω ±5% 8P	PCS	5	RN201~RN203,RP701,RP702
1050006	SMD THERMISTOR	PTC LP-MSM200 1812	PCS	1	RP601
0310042	SMD CAPACITOR	50V 15P ±5% NPO 0603	PCS	4	C229,C233,C234,C237
0310085	SMD CAPACITOR	50V 20P ±5% NPO 0603	PCS	3	C216,C402,C541
0310190	SMD CAPACITOR	50V 27P ±5% NPO 0603	PCS	6	C225,C226,C621,C622,C707,C708
0310045	SMD CAPACITOR	50V 47P ±5% NPO 0603	PCS	14	C134,C408,C413,C427,C443,C449,C450,C736,C301,C302,C317,C318,C320,C321
0310047	SMD CAPACITOR	50V 101 ±5% NPO 0603	PCS	13	C410,C415,C430,C445,C452,C453,C513,C520,C530,C536,C537,C543,C737
0310189	SMD CAPACITOR	50V 18P ±5% NPO 0603	PCS	3	C306,C309,C313
0310048	SMD CAPACITOR	50V 151 ±5% NPO 0603	PCS	2	C113,C120
310051	SMD CAPACITOR	50V 331 ±5% NPO 0603	PCS	2	C257,C258
0310066	SMD CAPACITOR	50V 102 ±10% 0603	PCS	23	C215,C224,C266,C519,C521,C522,C528,C529,C531,C533~C535,C538,C544,C545,C606,C607,C150,C459,C460,C426,C421,C442
0310188	SMD CAPACITOR	50V 10P ±5% NPO 0603	PCS	1	C283
0310231	SMD CAPACITOR	50V 122 ±10% 0603	PCS	6	C523,C524,C532,C539,C540,C546
0310067	SMD CAPACITOR	50V 152 ±10% 0603	PCS	1	C265
310069	SMD CAPACITOR	50V 272 ±10% 0603	PCS	1	C433
0310072	SMD CAPACITOR	50V 103 ±10% 0603	PCS	2	C124,C255
0310201	SMD CAPACITOR	50V 153 ±10% 0603	PCS	1	C254
0310204	SMD CAPACITOR	50V 333 ±10% 0603	PCS	1	C213
0310205	SMD CAPACITOR	50V 473 ±10% 0603	PCS	2	C218,C219

0310543	SMD CAPACITOR	50V 104±10% 0603	PCS	168	C101~C104,C106~C112,C114~C119,C121,C123,C126~C129,C131,C132,C136,C137,C139,C142~C145,C147,C149,C201~C205,C208~C212,C214,C221~C223,C227,C228,C238~C253,C256,C259~C264,C268~C281,C305,C311,C322,C323,C407,C409,C412,C414,C428,C429,C431,C432,C434,C435,C444,C451,C501~C512,C514~C518,C526,C527,C542,C549~C552,C601~C603,C608,C610,C611,C613~C617,C619,C620,C623,C625,C703~C705,C728~C732,C735,C738~C742,C627,C151,C152,C303,C304,C307,C308,C315,C319,C325,C327,R556
310112	SMD CAPACITOR	16V 224 ±10% 0603	PCS	2	C138,C609
0310379	SMD CAPACITOR	25V 474 +80%-20% 0603	PCS	5	C220,C436,C437,C604,C605
0310234	SMD CAPACITOR	16V 105 +80%-20% 0603	PCS	9	C206,C217,C230~C232,C235,C236,R443,R456
0310566	SMD CAPACITOR	10V 225 +80%-20% 0603	PCS	1	C438
0310658	SMD CAPACITOR	25V 105 ±10% 0805	PCS	5	C130,C140,C701,C702,C706
0310659	SMD CAPACITOR	25V 225 ±10% 0805	PCS	6	C422,C423,C439,C440,TC520,C719
0310219	SMD CAPACITOR	16V 106 +80%-20% 1206	PCS	22	C105,C146,C148,C267,C324,C612,C618,C624,C733,C734,TC203,TC501~TC504,TC518,C626,C328,C330,C331,C547,C548
0310549	SMD CERAMIC CAPACITOR	25V 106+80%-20% 1210	PCS	2	C141,TC522
310577	SMD CERAMIC CAPACITOR	10V 226 +80% -20% 1206	PCS	1	TC103
0310548	SMD TANTULUM CAPACITOR	6.3V100UF±20% 3528(B2)	PCS	3	TC121,TC201,TC701
0310390	SMD TANTULUM CAPACITOR	16V10U±20% 3216	PCS	19	TC202,TC407,TC408,TC505~TC517,TC519,TC410,TC411
0310376	SMD TANTULUM CAPACITOR	NRS10V47U±20%3528(B2)	PCS	26	TC101,TC102,TC104~TC110,TC117,TC204~TC210,TC402~TC404,TC409,TC605~TC607,TC702,TC703
0310375	SMD TANTULUM CAPACITOR	16V100UF±20% 7343(D)	PCS	2	TC401,TC405
260624	SMD CD	25V100U±20% 6.3×6.3×7.7	PCS	21	TC114,TC115,TC116,TC125,TC126,TC601~TC604,TC608,TC524,TC111~TC113,TC118,TC119,TC120,TC122~TC124,TC127
0390096	SMD INDUCTOR	1.8UH ±10% 1608	PCS	7	L401~L403,L405~L407,L701
0390044	SMD INDUCTOR	10UH ±10% 2012	PCS	2	L102,L103
0390261	SMD MAGNETIC CORE INDUCTOR	5.4UH±20% CDRH5D18	PCS	1	L107
0390241	SMD MAGNETIC CORE INDUCTOR	10uH±20%CDRH5D18	PCS	2	L106,L404
390333	SMD MAGNETIC CORE INDUCTOR	33UH±30% CDRH105R	PCS	1	L601
0390260	SMD MAGNETIC CORE INDUCTOR	22UH±20% CDRH8D43	PCS	1	L108
0390259	SMD MAGNETIC BEADS	FCM2012-120T2A	PCS	22	FB101,FB113~FB116,FB118~FB121,FB123,FB303,FB309,L104,L101,FB122,FB127,FB301,FB302,FB304~FB307

0390095	SMD MAGNETIC BEADS	FCM1608K-221T05	PCS	39	FB201,FB203~FB212,FB214,FB216,FB410,FB412~FB413,FB421,FB416,FB501~FB508,FB701~FB706,FB717~FB720,FB404,FB418,FB423
700007	SMD DIODE	1N4148	PCS	10	VD102,VD405,VD406,VD501~VD505,VD601,VD701
0700056	SMD DUAL DIODE	MMBD4148SE SOT-23	PCS	4	VD401,VD403,VD404,VD702
0700063	SMD DUAL DIODE	MMBD4148CA SOT-23	PCS	1	VD201
0680027	SMD SCHOTTKY DIODE	SS34	PCS	1	VD101
0680049	SMD SCHOTTKY DIODE	RB051L-40	PCS	1	VD101
680028	SMD SCHOTTKY DIODE	MBR5340	PCS	2	VD602,VD402
0700121	SMD VOLTAGE REGULATOR DIODE	10V 1/2W	PCS	1	ZD601
0780040	SMD TRIODE	3904	PCS	1	Q105
0780085	SMD TRIODE	8050D	PCS	7	Q601~Q603,Q605,Q606,Q306,Q307
0780129	SMD TRIODE	8550D	PCS	3	Q604,Q507,Q509
0780197	SMD TRIODE	C1815	PCS	14	Q408,Q409,Q501~Q506,Q508,Q411,Q412,Q413,Q414,Q607
0780115	SMD TRIODE	2SB1132	PCS	2	Q101,Q102
0780193	SMD TRIODE	2SK3018	PCS	2	Q103,Q104
0790041	FIELD EFFECT TUBE	SI2305DS SOT-23	PCS	2	Q301,Q302
0790021	FIELD EFFECT TUBE	IRF7416 SOP	PCS	1	QB602
0790039	FIELD EFFECT TUBE	IRF7316 S08	PCS	1	QB601
2300020	SMD TUBE	3A 250V	PCS	1	F101
2300023	SMD TUBE	T3AL 125V	PCS	1	F101
0620032	DUAL-COLOR RADIATION DIODE	2RG 59SW RED AND GREEN 2×5×7	PCS	2	LED601,LED301
0881031	IC	24C02N SOP	PCS	2	U103,U302
0881631	IC	XC6201P502PR SOT-89	PCS	1	U606
0881855	IC	XC602P502PR SOT-89	PCS	1	U606
0881892	IC	XC6202P802PR SOT-89	PCS	1	U501
0882425	IC	ADG713 TSSOP	PCS	1	U303
0882202	IC	AU9362A21-MCL QFP	PCS	1	U301
0960237	SMD CRYSTAL OSCILLATOR	12.00MHz 49-S	PCS	1	X301
2360016	IR SENSOR	HS0038B3V	PCS	1	U104
0880176	IC	LM358M SOP	PCS	1	U605
0882105	IC	LM393 SO8	PCS	2	U601,U602
0881526	IC	FDS8958A SO8	PCS	1	U107
881057	IC	CS4360 SSOP	PCS	1	U503
0881405	IC	BA5954FM HSOP	PCS	1	U102
0881513	IC	BA6849FM HSOP	PCS	1	U101
0881682	IC	BA6849FP HSOP	PCS	1	U101
0880562	IC	4580 SOP	PCS	3	U504~U506
880185	IC	NJM4558M SOP	PCS	3	U504~U506
0880361	IC	4558 SOP	PCS	3	U504~U506
0881920	IC	PQ05DZ11 SC-63	PCS	1	U109
0881937	IC	TPA0152 TSSOP24	PCS	1	U401
0882536	IC	S3F9454 SOP (369)	PCS	1	U604
0882340	IC	TVP5150A TQFP	PCS	1	U701
0881913	IC	MAX1775EEE QSOP16	PCS	1	U106
0881182	IC	LM1117MP-ADJ SOT-223	PCS	2	U108,U702
0882285	IC	TL431-2.5V SOT-23	PCS	1	U603
0881914	IC	RT9701CB SOT25	PCS	1	U304
0881415	IC	HY57V641620HGT-7 TSOP	PCS	1	U201
0881189	IC	MT48LC4M16A2-7 SOP	PCS	1	U201
0881994	IC	MT1389FE QFP	PCS	1	U202
0960245	SMD CRYSTAL OSCILLATOR	8.00MHz ±20ppm 49-S	PCS	1	X601
0960234	SMD CRYSTAL OSCILLATOR	14.31818MHZ 49-S	PCS	1	X701
960236	SMD CRYSTAL OSCILLATOR	27.00MHz 49-S	PCS	1	X201
1310085	SWITCH	SK-42D01-PG4	PCS	1	JK401
1310083	SWITCH	SK-12D06-D2	PCS	1	SW102
1350062	TESTING SWITCH	DS-24	PCS	1	SW401
1350053	TESTING SWITCH	SPVE110600	PCS	2	SW101,SW103

1870021	POWER SOCKET	DC-023	PCS	1	JK101
1090049	ELECTRO-OPTIC TRANSFORMER	GP1FD310TP	PCS	1	JK501
1860068	BATTERY CONNECTOR	4P 2.5mm DC-C10398	PCS	1	JK601
1632013	PCB	23103-1	PCS	1	
1990027	3-IN-1 CARD HOLDER	SD/MS/MMC 23芯 H=4.2 TOP	PCS	1	JK301
1860047	USB SOCKET	CAM-B85-4Pin	PCS	1	JK303
1940208	CABLE SOCKET	30P 0.5mm SMD WITH CLASP	PCS	1	XS103
1940229	CABLE SOCKET	15P 0.5mm SMD WITH CLASP	PCS	1	XS101
1940150	SOCKET	4P 1.0mm SMD	PCS	1	XS102
1940238	SOCKET	2P 1.25mm SMD	PCS	2	XS401, XS402
1940237	SOCKET	20P 0.8mm SMD	PCS	2	JK405, JK701
1910106	A/V SOCKET	ST-066-060-500	PCS	1	JK406
1910101	AV SOCKET	PJ-327 BLACK	PCS	4	JK402, JK403, JK502, JK503
1910104	AV SOCKET	PJ-327 YELLOW	PCS	1	JK404