



---

# **SITE TECHNICAL DOCUMENTATION**

## **myC5-2m, myC5-2v**

---

---

**Doc. No. : MTB DTS 1**  
**Version : A**  
**Date : December 16 2005**

---

Produced by SAGEM COMMUNICATION GROUPE SAFRAN  
ZI NORD Chemin de Baillot, BP 357, 82003 Montauban cedex, France  
Tel (33) 5 63 21 21 21 - Fax (33) 5 63 21 21 54

Copyright 2005  
SAGEM  
Montauban, France



# CONFIDENTIALITY

This document is SAGEM's limited company property. It can not be reproduced or communicated without the written license.

# Contents

## CHAPTER 1 - FOREWORD

- 1-1 HOW TO USE THE SITE TECHNICAL DOCUMENTATION
  - 1-1-1 Use
- 1-2 ABBREVIATIONS
- 1-3 COMMENTS SHEET

## CHAPTER 2 - DESCRIPTION - OPERATION

- 2-1 REMINDERS ABOUT THE GENERAL CHARACTERISTICS OF GSM AND PCS NETWORKS
- 2-2 REMINDERS ABOUT THE HAND SET CHARACTERISTICS
- 2-3 IN & OUT CONNECTOR
  - 2-3-1 Connector description
  - 2-3-2 Signal description
- 2-4 IDENTIFICATION
  - 2-4-1 Illustration
  - 2-4-2 Description
  - 2-4-3 Description after reparation
- 2-5 PHONE BLOCK DIAGRAMS
  - 2-5-1 Block diagram
  - 2-5-2 Standards and environment
- 2-6 EQUIPMENTS
  - 2-6-1 Battery packs
    - 2-6-1-1 Characteristics
    - 2-6-1-2 Description
    - 2-6-1-3 Charging time
  - 2-6-2 Mains modules
    - 2-6-2-1 Description
    - 2-6-2-2 Travel mains modules
    - 2-6-2-3 Simple mains modules

## CHAPTER 3 - SYMPTOMS

- 3-1 GENERAL
  - 3-2 LIST OF REPORTED DEFECTS
  - 3-3 ERROR MESSAGES DURING START UP
  - 3-4 OTHER ERROR MESSAGES
  - 3-5 LIST OF OBSERVED DEFECTS
  - 3-6 INFORMATION ABOUT NEW NOTICED FAULTS
- SYMPTOM SHEETS

## CHAPTER 4 - TESTS AND CHECKS

- 4-1 GENERAL ABOUT TESTS
- 4-2 TEST TOOLS
- 4-3 INSTALLING ON A WORKSTATION (SMT STATION)
  - 4-3-1 Minimum required configuration
  - 4-3-2 Installing the cra downloading kit
  - 4-3-3 Smt functions

## TEST SHEETS

### CHAPTER 5 - MAINTENANCE PROCEDURES

- 5-1 TECHNICAL WORK LEVELS
- 5-2 SHORT LOOP PROCESS
- 5-3 MAINTENANCE TOOLS
- PROCEDURE SHEETS

### CHAPTER 6 - ACCESSORIES

- 6-1 CIGAR LIGHTER CHARGERAC1
  - 6-1-1 Description
  - 6-1-2 Characteristics
- 6-2 PEDESTRIAN HANDSFREE KIT
  - 6-2-1 Description
  - 6-2-2 Characteristics
- 6-3 DATA CABLE PC USB
  - 6-3-1 Description
  - 6-3-2 Characteristics

### CHAPTER 7 - TECHNICAL INFORMATION BULLETIN

- 7-1 PURPOSE
- 7-2 APPLICATION

### CHAPTER 8 - ILLUSTRATED PARTS CATALOG

- 8-1 SPARE PARTS

## INDEX

# CHAPTER 1 - FOREWORD

This document is common to all myC5-2m, myC5-2v phones in the SAGEM. It is composed of independent sheets:

- Symptom sheets = Symp Sheet XX
- Test and check sheet = Test Sheet XX
- Maintenance procedure sheet = Proc Sheet X XX

The applicability of a procedure is indicated in the independent sheets title block.

These sheets are updated from time to time in Technical Information Bulletins (TIB).

The information contained in this document is non-contractual, since phone characteristics can change.

Phones are managed based on SAGEM handset codes; any order for spare parts must refer to these codes (typical code 25 xxx xxx-x).


## 1.1 HOW TO USE THE SITE TECHNICAL DOCUMENTATION

This is a modular document. Each sheet is single and independent. In some cases several sheets may have to be used in order to determine the complete procedure to be applied.

A troubleshooting chapter (chapter 3) is provided and is sorted according to the type of reported fault, to determine the maintenance procedure to be carried out.

These sheets describe the procedure to be followed. They refer to test sheets or removal and replacement maintenance sheets. Maintenance, executed by the repair center, terminates either by returning the product to the customer, or by dispatching it to level 3 maintenance (return to factory).

The procedure sheets have a number but not systematically consecutive but always in a growing order.

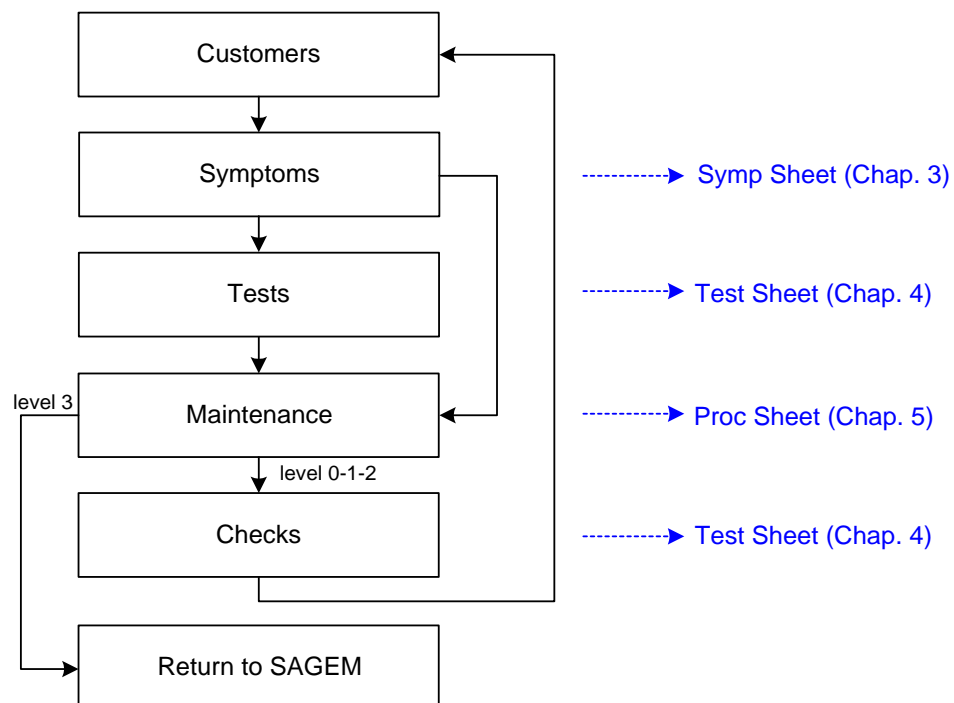

All sheets include illustrations to make it easier to read the procedure.

Chapter 1: Foreword, describes general data about this document.

Chapter 2: Description - Operation, describes general data and options available in the myC5-2m, myC5-2v.

Chapter 3: Symptoms, contains troubleshooting procedures to be carried out on equipment.

Chapter 4: Tests and checks, contains tests and check procedures to be performed on the equipment.

Chapter 5: Maintenance procedures, contains level 0 to 2 maintenance procedures to be carried out on the equipment, and the procedure to return to SAGEM level 3.

Chapter 6: Accessories, describes the characteristics of accessories for myC5-2m, myC5-2v phones.

Chapter 7: Technical Information Bulletins, contains the various modifications made to this documentation.

Chapter 8: Illustrated Parts Catalogue, contains the various reference for spare parts.

### 1.1.1 Use

The DTS can be used by means of computer or by paper medium

-For circulation on the DTS one can use the contents which consists of bonds hypertext, and in bottom of each page, one finds a bond which makes it possible to return until the contents.

-For the paper use an index east provides on last page which indicates the numbers of pages of each heading.

## 1.2 ABBREVIATIONS

AAC	Advanced Audio Codeur
ADPCM	Adaptive Differential Pulse Codec Modulation
ALS	Alternative Line Services
AOC	Advice Of Charge
CCD	Charged Coupled Device
CLI	Calling Line Identification
CLIP	Calling Line Identification Presentation
CSTN	Colored Super Twisted Nematic
DCS	Digital Cellular System
EFR	Enhanced Full Rate
EMS	Enhanced Message Service
FDN	Fixe dial number
GPRS	General Packet Radio Service
GSM	Global System for Mobile
IMEI	International Mobile Equipment Identity
ISO	International Standard Organisation
LCD	Liquid Crystal Display
LU	Livret d'Utilisation
MMS	Multimedia Message Service

PCS	Personnal Communication Service
PIN	Personal Identity Number
PUK	PIN Unlocking key
RF	Radio Frequence
SAR	Specific Absortion Rate
SIM	Subscriber Identity Module
SMS	Short Message Service
SMS CB	Short Message Service Cell Broadcast
SMT	Sagem Mobile Tools
TFT	Thin Film Transistor
USSD	Unstructured Supplementary Service Data
VGA	Video Graphics Array
WAP	Wireless Application Protocol
WiFi	Wireless Fidelity
WSP	Wireless Session Protocol

### 1.3 COMMENTS SHEET

Broad experience is very beneficial in several respects. Please let us know your comments so that we can improve the contents and presentation of this document.

Your suggestions will be read carefully by :

- the design laboratory,
- production,
- the purchasing department,
- the after sales service,
- all users of this document.

All your suggestions are valuable, they will help us to better satisfy you.  
Please photocopy and fill in the sheet 1-4.



Document title: **Site Technical Document**

Reference :

Date :

Please fill in the following table :

	<b>Excellent</b>	<b>Good</b>	<b>Fairly good</b>	<b>Passable</b>
Easy to find the required information				
Clarity of information provided				
Quality and accuracy of information given				
Document outline				
Document presentation and appearance				
Quality of illustrations				
General satisfaction				

Do you think this document could be improved ? if so, how ? :

- Improve the overall view
- Improve the table of contents
- Improve the structure
- Add illustrations
- Add details
- Add information

Comments : \_\_\_\_\_

\_\_\_\_\_

Would you like to discuss the problems mentioned in this questionnaire? If so, state :

Name of the person to be contacted : \_\_\_\_\_ Phone : \_\_\_\_\_

Company : \_\_\_\_\_ Date : \_\_\_\_\_

Address : \_\_\_\_\_

**THANK YOU FOR PARTICIPATING IN THIS ENQUIRY. YOUR COMMENTS WILL HELP US CONTINUE TO IMPROVE THE QUALITY OF OUR DOCUMENTATION AND THUS BETTER SATISFY YOUR NEEDS.**

When you have filled in this questionnaire, please send it :

- by mail, to **SAGEM S.A.  
CHEMIN DE BAILLOT BP 357  
82003 MONTAUBAN CEDEX  
FRANCE**

**YOU CAN CONTACT US ON: [cra.mobile@sagem.com](mailto:cra.mobile@sagem.com)**

## CHAPTER 2 - DESCRIPTION - OPERATION

### 2.1 REMINDERS ABOUT THE GENERAL CHARACTERISTICS OF GSM 900, DCS 1800 and PCS 1900

Table 1 below gives the characteristics of the radio interface for the GSM 900, DCS 1800 and PCS 1900 systems :

	<b>GSM 900</b>	<b>DCS 1800</b>
Frequency Band (MHz)	880 - 915 925 - 960	1710 - 1785 1805 - 1880
Number of time intervals per TDMA frame	8	
Width 2 x W simplex (MHz)	2 x 25	2 x 75
Duplex spacing (MHz)	45	95
Modulation speed (kbit/s)	271	
Speech throughput (kbit/s)	13 (5,6)	
Maximum data throughput (kbit/s)	12	
Multiple access	Multiplexage fréquentiel et temporel / duplexage fréquentiel	
Cell radius (km)	0,3 à 30	0,1 à 4
SAGEM terminal power (W)	2	1
<b>Tableau 1 : Interface Radio</b>		

Table 2 shows powers as a function of the network:

Class number	<b>GSM 900</b>		<b>DCS 1800</b>	
	Maximum nominal power (W)	Allowable interval (W)	Maximum nominal power (W)	Allowable interval (W)
1	-	-	1	[0,63 ; 1,6]
2	8	[5,0 ; 12,7]	0,25	[0,16 ; 0,4]
3	5	[3,2 ; 7,9]	4	[2,5 ; 6,3]
4	2	[1,3 ; 3,2]		
5	0,8	[0,5 ; 1,3]		
<b>Tableau 2 : Classe des puissances des terminaux</b>				

Table 3 shows power classes :

	Class 1	Class 2	Class 3	Class 4	Class 5
GSM 900	43 dBm	39 dBm	37 dBm	33 dBm	29 dBm
DCS 1800	30 dBm	24 dBm	36 dBm	-	-
<b>Tableau 3 : Classes de puissance RF</b>					

## 2.2 REMINDERS ABOUT THE CHARACTERISTICS AND OPTIONS

## General characteristics

### Name

Name	myC5-2m, myC5-2v
------	------------------

### Size

Dimensions	Built-in
Weight	82,2x42,7x23
Volume	85

### Power management

Battery type	79
Connector type	Li-ion 700mAh
Charging time	Clam
Talk time	2H00
Standby time	3h00

### User interface

Screen type	240h00
Colours	CSTN
Number of lines	65,536
Screen size	up to 8 lines
Screen resolution	no
Backlight	128x160
Sub LCD	yes, blue

### Customisation

Handset colours	yes, 96x64 pixels, Black & White
Interchangeable covers	Black+Silver, Blue+Silver

## *Radio*

Type GSM	no
GSM Band	biband
Voice codecs	yes

## *Operating system*

Operating System	EFR, HR, FR, AM
------------------	-----------------

## **Connectivity**

### *Radio*

GPRS	Proprietary
EDGE	Yes, class 10 (4+1 & 3+2)
UMTS	no

### *Internet*

Browser	no
Push	WAP 2.0
Fax modem	yes

### *Data transfer*

Serial	yes
IrDA	no
Bluetooth	no
USB	no
Wifi	Yes, data cable with USB conne
PC synchronisation	no

## **Multimedia**

### *Messaging*

SMS	yes
EMS	MO/MT/CB
MMS	Yes, v5

E mail	Yes, v4
IMPS	no
Predictive text input	no

## *Video & images*

Camera	T9
Image features	Yes, CMOS VGA definition ( 640x480 )
Video Player	yes
Image Format	Yes, play and record ( H263 format )

## *Audio*

Audio player	BMP, WBMP, PNG, JPEG, GIF, Animated GIF
Audio Recorder	Yes
FM radio	no
Polyphonic ringtones	no
Audio formats	Yes, 32 tones

## *Entertainment*

Wallpaper	iMELODY, MIDI, WAV ( PCM, ADPCM ), AMR, AAC, MP3
Screensaver	Yes, 30 embedded, random mode available
Clock display	Yes, fixed and animated
Icons	Yes, analog / digital
Skins	no
Ringtone	Yes
Boot up and shut down sequences	no
Bookmarks inserted in Games menu	no
Embedded Games	yes
Downloaded application	Yes, 2 games ( Lords of the rings, Plane

## *JAVA*

JAVA	no
------	----

## *OTA dowload*

Protocol supported	Yes, MIDP2.0 CLDC 1.1
Wallpapers	EMS, MMS, WSP-Get, WAP save as, PC Sync
Animation	Yes, via EMS, WAP, PC download ( MPAS )
Menu icon	Yes, via EMS, WAP, PC download ( MPAS )
Download skins	Yes
Games	no
Ringtones	Yes
Java application	no
Reproduction dossier	Yes

## *Real time dowload*

Flux audio	no
Flux video	no
Special features	no

## **Call management**

### *Voice features*

Mute mode	no
Numerotation vocale	yes
Integrated handsfree mode	no

### *Adress book features*

Call group	yes
Ringtone and Icone customisation	yes
Personal information management	yes

### *Advanced features*

Conference call	yes
Anonymus mode	yes
Call wait	yes
Call forwarding	yes

Automatic redial	yes
SIM toolkit	yes
Vibrate mode	yes
Speed dialing	yes
Call list	no
Caller ID	yes
Any key answer	yes
Automatic hang up	no

## Special features

### *Keyboard features*

Scroll key	yes
Programable key	no
Side key	Yes
Direct access key	Yes
Keypad lock	Yes
Silent key	yes
International access key	Yes, by long press on #
Menu key	Yes, by long press on 0

### *Personnal management features*

Calculator	no
Alarm Clock	yes
Timer	yes
Organizer	yes
To do	yes
Voice recorder	yes
Currency converter	Yes, AMR codec
Languages	yes

# Memory

## *Memory*


Internal phone book	up to 10 languages embedded
Memoire message	Depending on available free shared memory, up to
	3Mbytes
Redial List	Depending on available free shared memory, up to
	3Mbytes
Additional multimedia memory	Depending on available free shared memory, up to
	3Mbytes
Embedded memory	no



## 2.3 IN & OUT CONNECTOR

### 2.3.1 Connector description

This connector is located at the bottom of the transmission module and enables the connection to various accessories. It comprises power supply pins and signals.

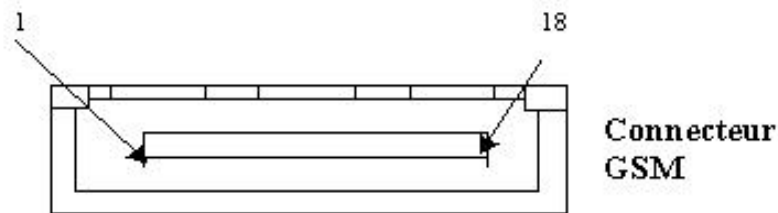

### 2.3.2 Signal description

Symbol	Pin connector	Signal fonction
HSCMICIP	1	Differential input for external microphone
HSCMICN	2	Differential input for external microphone
HSOL	3	STEREO AND MONO AUDIO OUTPUT
HSOR	4	STEREO AND MONO AUDIO OUTPUT
VBAT	5	POWER SUPPLY IMAGE VOLTAGE, connect this signal to "CHARGER" (pin n°1) to switch the module on.
INTI2C	6	Interrupt signal reserved for sagem specific accessories
CTS	7	Link v24 suit for accessory data
RTS	8	Link v24 suit for accessory data
DSR	9	Link v24 suit for accessory data
DTR	10	Link v24 suit for accessory data
TXD1	11	Link V24 suit for accessory data
Chargeur	12	Phone set power ON and power supply signal
GND	13	ZERO VOLT
RXD1	14	Link V24 suit for accessory data
R1	15	Complete V24 tie for data accessories
DCD	16	Complete V24 tie for data accessories
RXD2	17	Application input serial n°2
Chargeur	18	Phone set power ON and power supply signal

## 2.4 IDENTIFICATION

All phones are identified with an identification label stuck on the antenna.

### 2.4.1 Illustration



### 2.4.2 Description

a1 : IMEI (bar code),

a2 : IMEI (15 characters)

b1 : Reference of product / aesthetic used .

b2 : Kind of handset / SAGEM Family.

c1: customer personalisation

d1: Production date (date code) + Production level,

Ex. F260/03 = (F) fabrication area (F : Fougères), (260) day of year, (03) last digit of year (03@2003).

e1 : Logo and agreement.

### 2.4.3 Description after repair

A new sticker is positioning by Repairing Centre on the antenna:




This extra line will appear if the mobile has already been repaired.

- CRA XXX -> N° de CRA.

- 260/03 -> Date of repair (260), repairing day (03), last digit of year (03->2003).

## 2.5 PHONE BLOCK DIAGRAM

### 2.5.1 block diagram

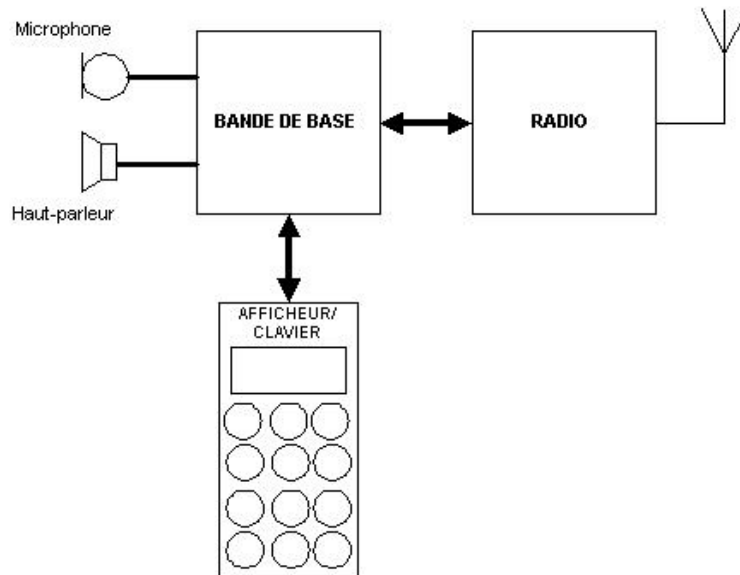

### 2.5.2 Standards and environment

The phone complies with the following standards.

Directive EEC 1999 / 5 / CE

Safety (security) EN 60950

CEM EN 301 489-1 / EN 301 489-7

Voltage 73 / 23 / EEC

Network 3GPP TS 51.010-1 v 5.2.0 with included GCF-CC V 3.10.0

Requirements GT01 v 4.7.0 / TBR 19 edition 5 / TBR 20 edition 3

TBR 31 edition 2 / TBR 32 edition 2 / EN 301 419-1 / EN 301511

Health EN 50360 / EN 50361

## 2.6 EQUIPEMENTS

The description and operation of SAGEM myC5-2m, myC5-2v are given in the "User's handbook" supplied with the handset. This chapter only describes equipment that operates with the myC5-2m, myC5-2v handset.

### 2.6.1 Battery packs



### 2.6.1.1 Characteristics

Designation	Technology	Weight	Voltage	Capacity

### 2.6.1.2 Description

Li-ion type batteries are used. They are rechargeable using:

- mains power supply module.

Batteries caution use:

- Store the batteries in a dry and cool place (excessive cold and heat damage the batteries reliability).
- They must never be stored in bulk, even the rejects, to avoid any short circuits.
- Do not dismantle the battery packs. (Li-Ion regulations).
- Only use original mains power supply module.

### 2.6.1.3 Charging time

The following table shows typical charging times for different batteries.

Battery : Li-ion 700mAh

Charger	charging time	Voltage
Cigar lighter chargers	3h00	94 V to 254 V
Astec low-cost	2h00	230 V
simple unregulated chargers 230	1h00	230 V (110V)
	1h00	


## 2.6.2 Mains modules

### 2.6.2.1 Description

These mains power supply modules accept large dynamic variations in the power supply network. They are available for a number of connector types:


- E.E.C,
- United Kingdom
- United States,
- Australia.

### 2.6.2.2 Travel mains modules

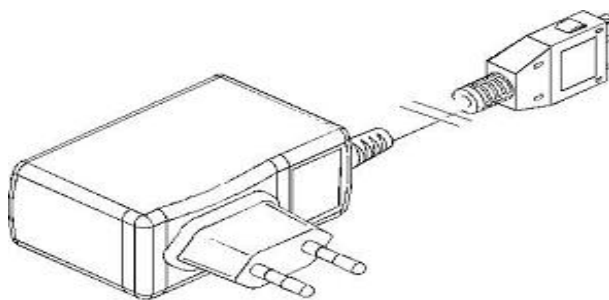

Designation	Weight (g)	Volume (cm3)	Voltage
US Power supply	125	65	110/230 V
UK Power supply	110	90	110/230 V
AUS Power supply	100	75	110/230 V
EEC Power supply	100	75	110/203 V

## 2.6.2.2 Simple mains modules

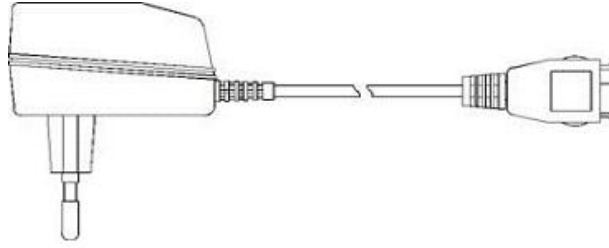

Designation	Weight (g)	Volume (cm3)	Voltage
AUS Main module	190	105	230 V
CE Main module	180	85	230 V
UK Main module	180	120	230 V
US Main module	210	105	110 V

## CHAPTER 3 - SYMPTOMS

### 3.1 GENERAL

After you have received the customer return sheet (Proc Sheet 3 02), carry out the troubleshooting procedure.

This chapter will help you to identify the defective element(s), using the troubleshooting table.

It contains flow charts broken down by fault type. Each flow chart describes the procedure to be followed and contains cross references to tests or maintenance.


These flow charts should be followed in full. After a reference to a removal/replacement sheet or to a test to be carried out, you should return to the initial flow chart and continue the search until reaching a final conclusion.

The conclusion of each troubleshooting procedure is :

- Return to SAGEM =The Return to the SAGEM centre can concern either the card, or the radiotelephone according to instructions given to the Centres of repair.

- Delivery to the customer

The mobiles will not be refurbished without a special and written authorisation .

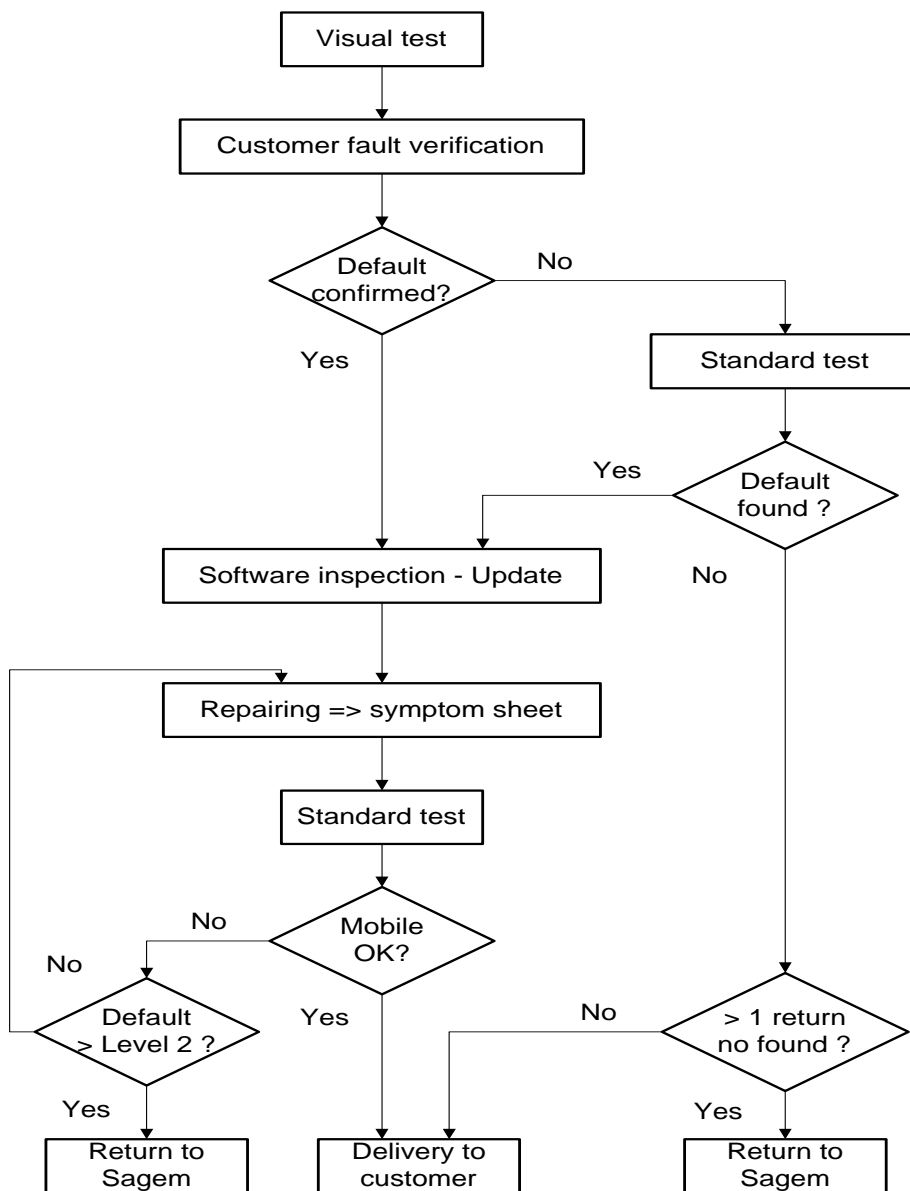



**Visual test :**

- Connector condition (in / out connector, battery, SIM)
- keypad condition (elastomer, inscription)
- Pane condition
- Plug and position of battery
- SIM card position
- Oxidation
- Charger test

**Standard test :**

- Display test : Hot Line menu
- Contrast control
- All keypad keys test (check bips keys)
- Test fonction camera
- Audio and radio test
- Battery charge test
- Vibrating device test : Hot Line menu

**Software inspection :**

For all mobiles to repair, the checking by SMT is mandatory (Test Sheet 01).

### 3.2 LIST OF REPORTED DEFECTS

The following is a list of defects that may be reported :

Default	Anomaly	Procédure
A1	No power up	Symp sheet 04
A2	No display up	Symp sheet 04
A3	Freezes up	Test sheet 01
A5	Broken LCD	Symp sheet 04
A6	Line or digit missing	Symp sheet 04
A10	broken or missing antenna	Proc sheet 1 01
B1	Defective contact battery	Symp sheet 01
B2	Defective charger connector	Proc sheet 1 20
		Proc sheet 3 01
B3	Defective board power supply	Proc sheet 1 20
		Proc sheet 3 01
B4	Defective charge icon display	Proc sheet 1 20
		Proc sheet 3 01
B5	Current consumption with phone off	Test sheet 04
B7	Autonomy	Symp sheet 01
B8	Electrically defective battery	Test sheet 03
B9	Mechanical problem on lock battery	Proc sheet 0 01
B10	Broken battery	Test sheet 03
B11	Defective charger	Test sheet 02
B12	Broken charger	Test sheet 02

B13	Intermittent cut with reboot	Proc sheet 1 20
		Proc sheet 3 01
B14	Intermittent cut without reboot	Proc sheet 1 20
		Proc sheet 3 01
C1	Not functioning keyboard	Symp sheet 05
C2	Lateral key problem	Symp sheet 05
D1	SIM missing	Proc sheet 1 20
		Proc sheet 3 01
D2	Other messages	Proc sheet 1 20
		Proc sheet 3 01
D3	EEPROM problem	Proc sheet 1 20
		Proc sheet 3 01
D4	Untuned mobile	Proc sheet 1 20
		Proc sheet 3 01
D5	Hard failure	Proc sheet 1 20
		Proc sheet 3 01
D6	SIM lock	Proc sheet 1 20
		Proc sheet 3 01
D7	Post code	Test sheet 01
D8	Return SAV	Proc sheet 1 20
		Proc sheet 3 01
D9	Unknown battery	Test sheet 03
E1	Defective loudspeaker (hails)	Symp sheet 10
E2	Loudspeaker voice distortion	Symp sheet 10
E3	Defective microphone	Symp sheet 08

E4	Vibrating device malfunction	<a href="#">Symp sheet 07</a>
E5	Vibrating device malfunction	<a href="#">Symp sheet 07</a>
E6	Defective audio connector	<a href="#">Symp sheet 08</a>
F1	No network localisation	<a href="#">Symp sheet 02</a>
F2	Intermittent calls drop	<a href="#">Symp sheet 02</a>
F4	Radio control no OK	<a href="#">Proc sheet 1 20</a>
		<a href="#">Proc sheet 3 01</a>
F5	Outgoing call failure	<a href="#">Symp sheet 02</a>
F6	Incoming call failure	<a href="#">Symp sheet 02</a>
G1	Broken or damaged window	<a href="#">Proc sheet 1 12</a>
		<a href="#">Proc sheet 1 37</a>
G2	Broken or damaged cover	<a href="#">Proc sheet 1 12</a>
		<a href="#">Proc sheet 1 13</a>
		<a href="#">Proc sheet 1 01</a>
G5	Broken or damaged keypad	<a href="#">Proc sheet 1 04</a>
H1	Accessory problem	<a href="#">Proc sheet 3 01</a>
H2	DATA problem	<a href="#">Proc sheet 3 01</a>
H3	Monetic problem	<a href="#">Proc sheet 1 20</a>
		<a href="#">Proc sheet 3 01</a>
I1	Oxidation mark	<a href="#">Proc sheet 1 20</a>
		<a href="#">Proc sheet 3 01</a>
I3	Monetic function	<a href="#">Symp sheet 03</a>
I5	Defective SIM connector	<a href="#">Test sheet 01</a>
I6	Defective sim connector	<a href="#">Proc sheet 1 20</a>
		<a href="#">Proc sheet 3 01</a>
I7	Lack function in the menu	<a href="#">Test sheet 01</a>

18	No fault found	<a href="#">Test sheet 01</a>
----	----------------	-------------------------------

### 3.3 ERROR MESSAGES DURING START UP

Message drawn	Message signification	Action
WARNING UNTUNED RADIO	Invalid EEPROM field (SAGEM)	SAGEM Factory Return
PB IMEI	Consistency problem at IMEI level	SAGEM Factory Return
SIM MISSING	SIM card missing or badly inserted	Insert the SIM card
IMEI ERROR	Consistency problem at IMEI level	SAGEM Factory Return
UNTUNED	Mobile not configured	SAGEM Factory Return
UNKNOWN BATTERY	Battery not recognised by the mobile	Replace the battery
MOBILE PHONE LOCKED	Number of seizures of sim locked code exceeded	SAGEM Factory Return Not repair under warranty
SIM BLOCKED	Three bad PIN codes have been input	Contact the operator
SIM LOCKED (with SIM)	SIM card not adapted to the operator	Replace the SIM card
SIM LOCKED (without SIM)	Attempt of corruption ( EEPROM fields)	SAGEM Factory Return Not repair under warranty
BATTERY TOO LOW	Battery state	Replace the battery

Nota : Return centre after sales service department SAGEM can concern either the card, or the mobile, according to instructions given to the CRAs.

### 3.4 OTHER ERROR MESSAGES

Message drawn	Message signification
BUSY	Problems related to the network and Communications

K.PAD LOCKED PRESS *OK	Keypad locked
OPTION NOT AVAILABLE	Menu not available for this product version
PROG.KEY NOT VALID	Input Problems
ERROR!!	Calculation error with the calculator (division by zero)
NOT AVAIL	Not available
PIN ERROR	PIN input problems
PIN2 BLOCKED	Following input errors
PUK ERROR	Following input errors
PUK2 BLOCKED	Following input errors
CODE ERROR	The phone code input for locking the mobile is incorrect
NOT REACHABLE	Call forwarding if the mobile is not reachable
NOT AVAIL	Service not implemented in the network

### 3.5 LIST OF OBSERVED DEFECTS

A SAGEM code is assigned to each confirmed defect. This code should be entered on Proc Sheet 3 01, SAGEM Factory Return, if the phone to be repaired is returned to SAGEM (see chapter 5).

### 3.6 INFORMATION ABOUT NEW NOTICED FAULTS


Detection by the repair center of new fault shall induce to respect the following procedure


- a) The concerned technician fills a precise report using the document NPD report SAV GSM 277 V1
- b) Then, this document is transmitted by email to the concerned Area Manager or Support Engineers for approval. Accordingly, 2 ways are possible :
  - The problem is already known by SAGEM, then the mobile have to follow the normal process in ARC with eventual additional data given by AM or SE
  - Return of mobile to MTB is requested.
- c) In that second case, the ARC will have to request a specific RMA number for this mobile in order to facilitate the treatment when arriving in SAGEM.
- d) This mobile returned to SAGEM will be swapped following ARCs habitual process for MTB return but will be MANDATORY linked to a paper version of the document filled by the technician.
- e) The treatment will have to be reproduced on the daily report and will be considered as level 3. Specified fault code will be then the technically closest one of the noted one, in the grid given by SAGEM




# SYMPTOM SHEETS

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

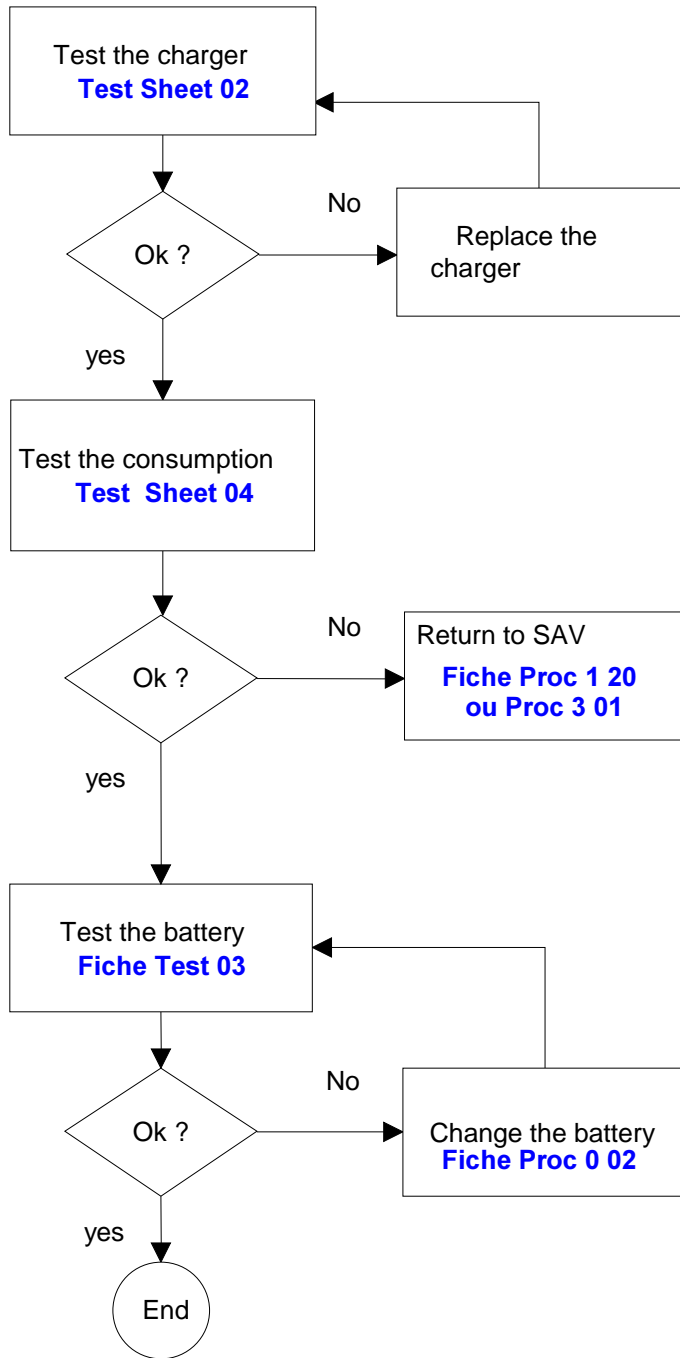


	COMMUNICATION  PROBLEM	SYMP SHEET 02
myC5-2m, myC5-2v		1/1

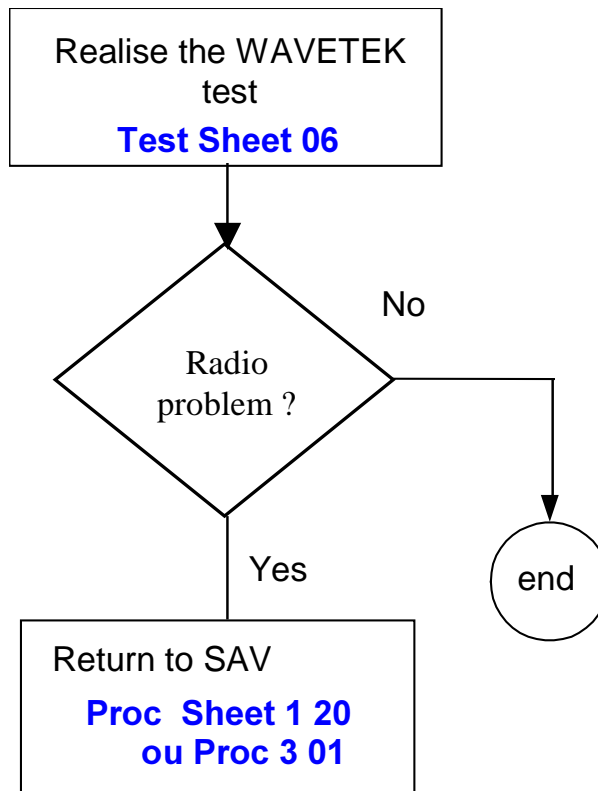


Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07


Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

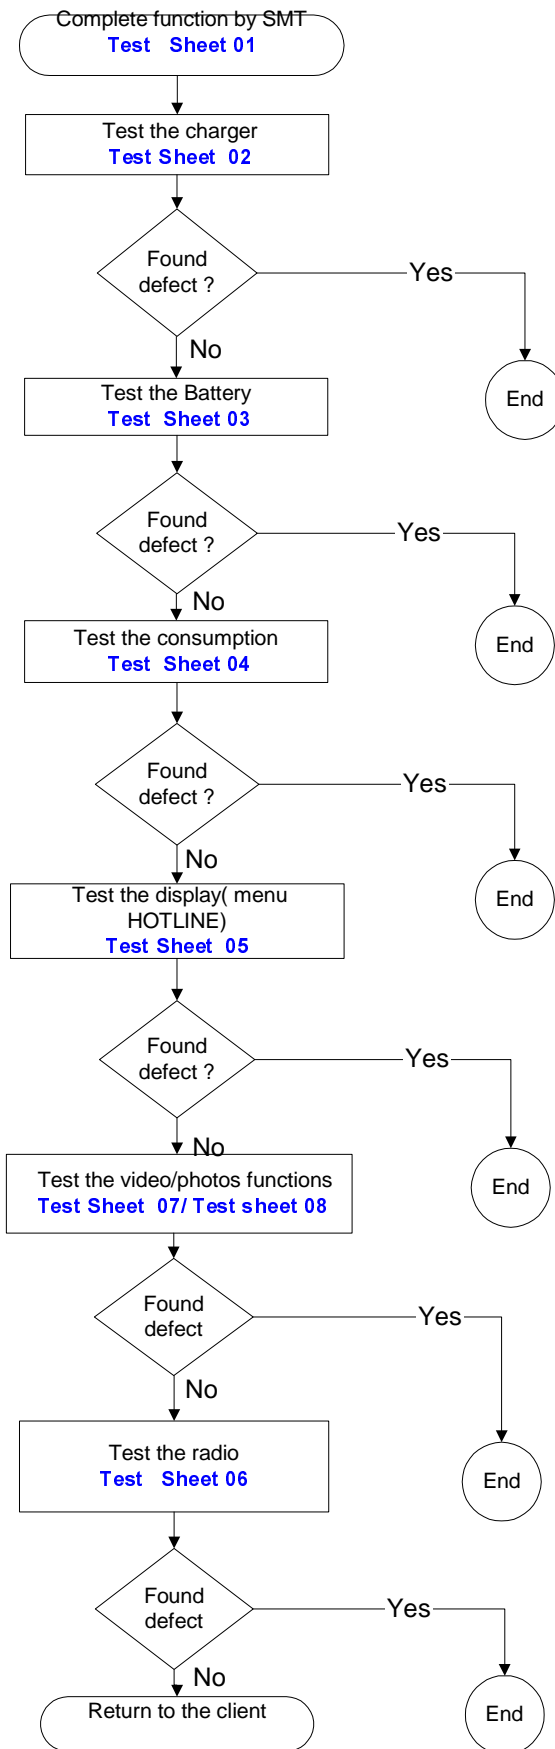

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

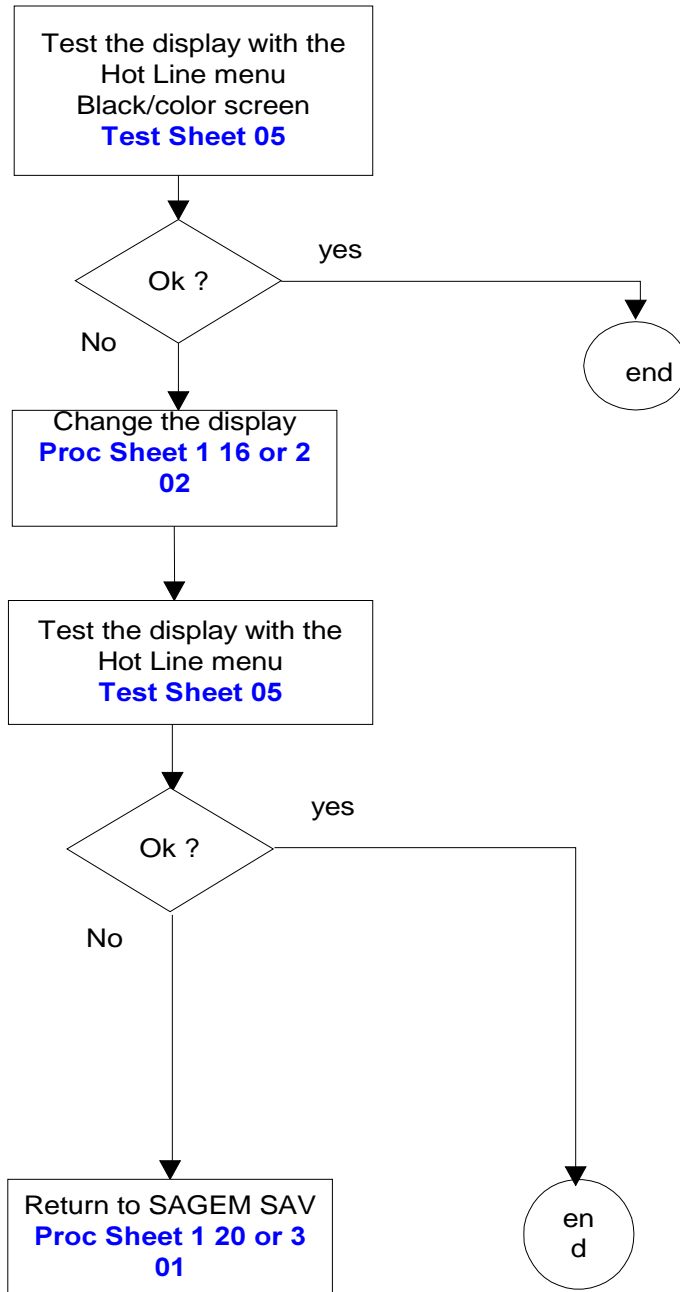

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

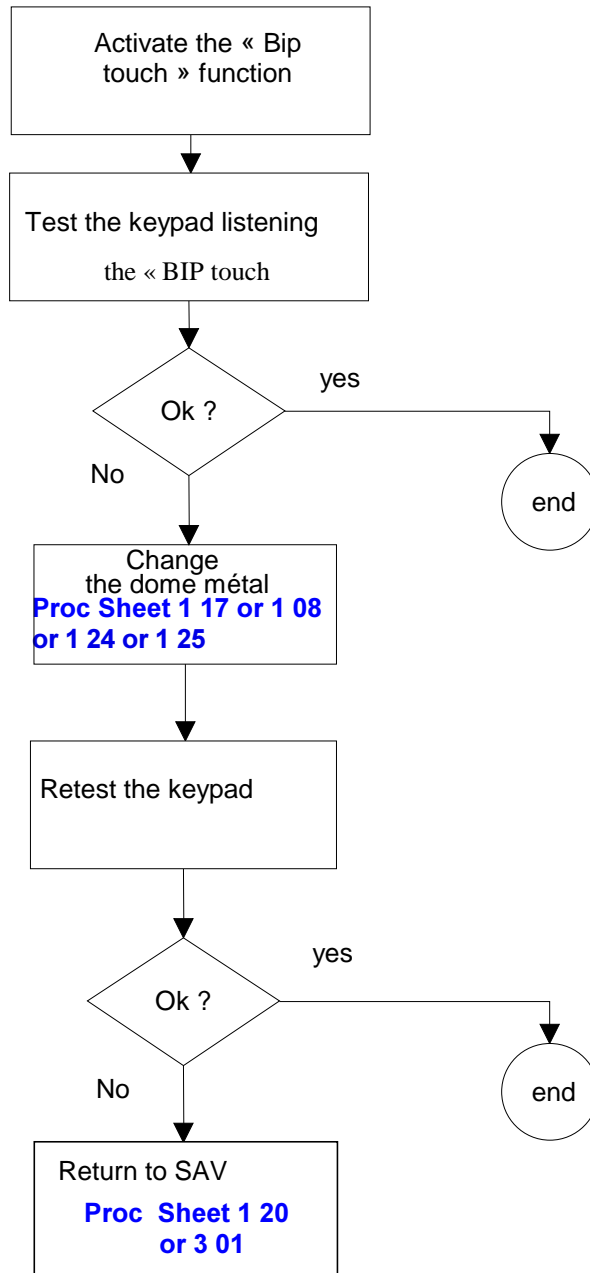

Select a ringtone in the Menu  
**Setting/sounds/ringtones/call**

Ringtone Ok ?

yes

end

No

Change the speaker  
**Proc Sheet 1 21**

Ringtone Ok ?


yes


end

No

Return to SAGEM  
**Fiche Proc 1 20  
ou Proc 3 01**

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07


 myC5-2m, myC5-2v	<b>VIBRATING DEVICE</b>  <b>PROBLEM</b>	SYMP SHEET 07  1/1

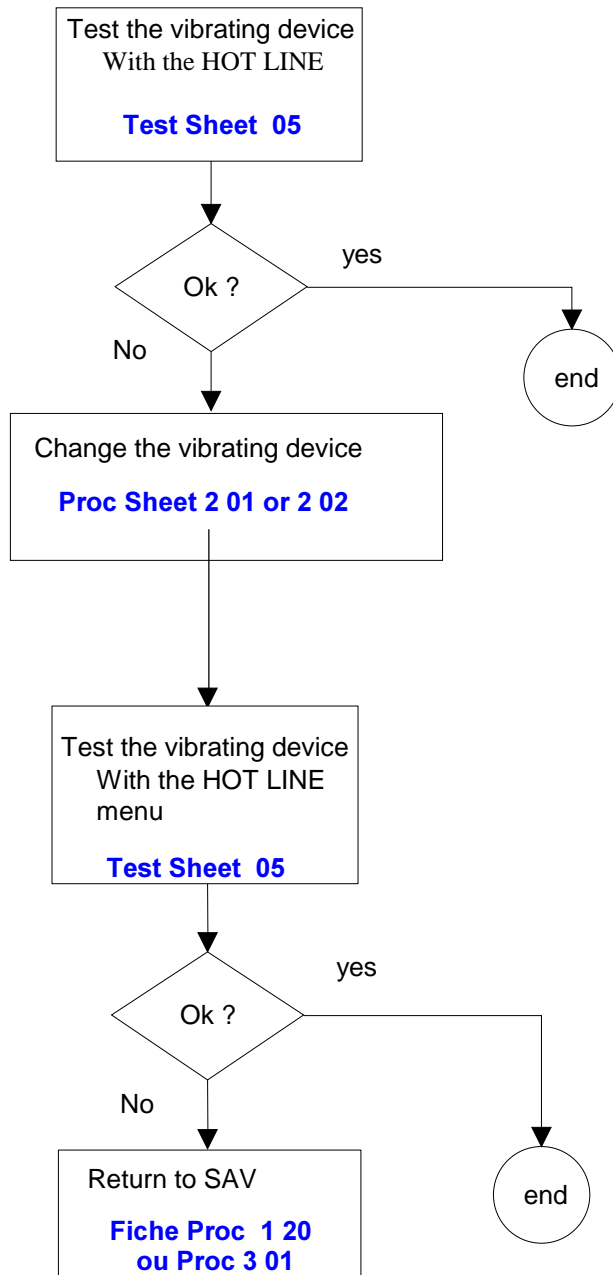


Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07




Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

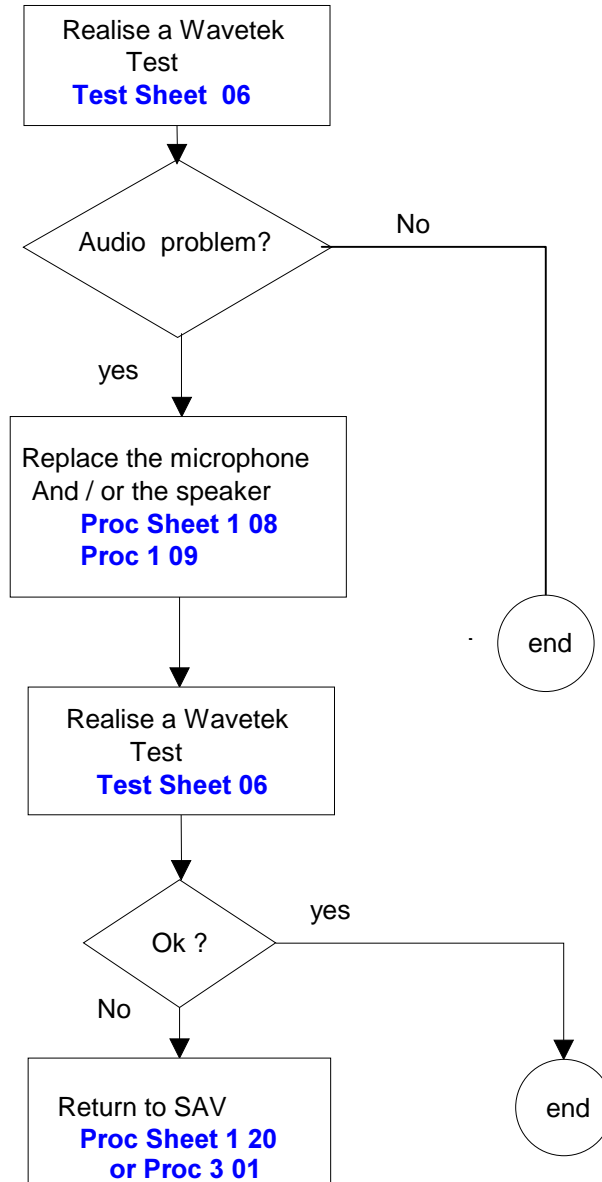

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

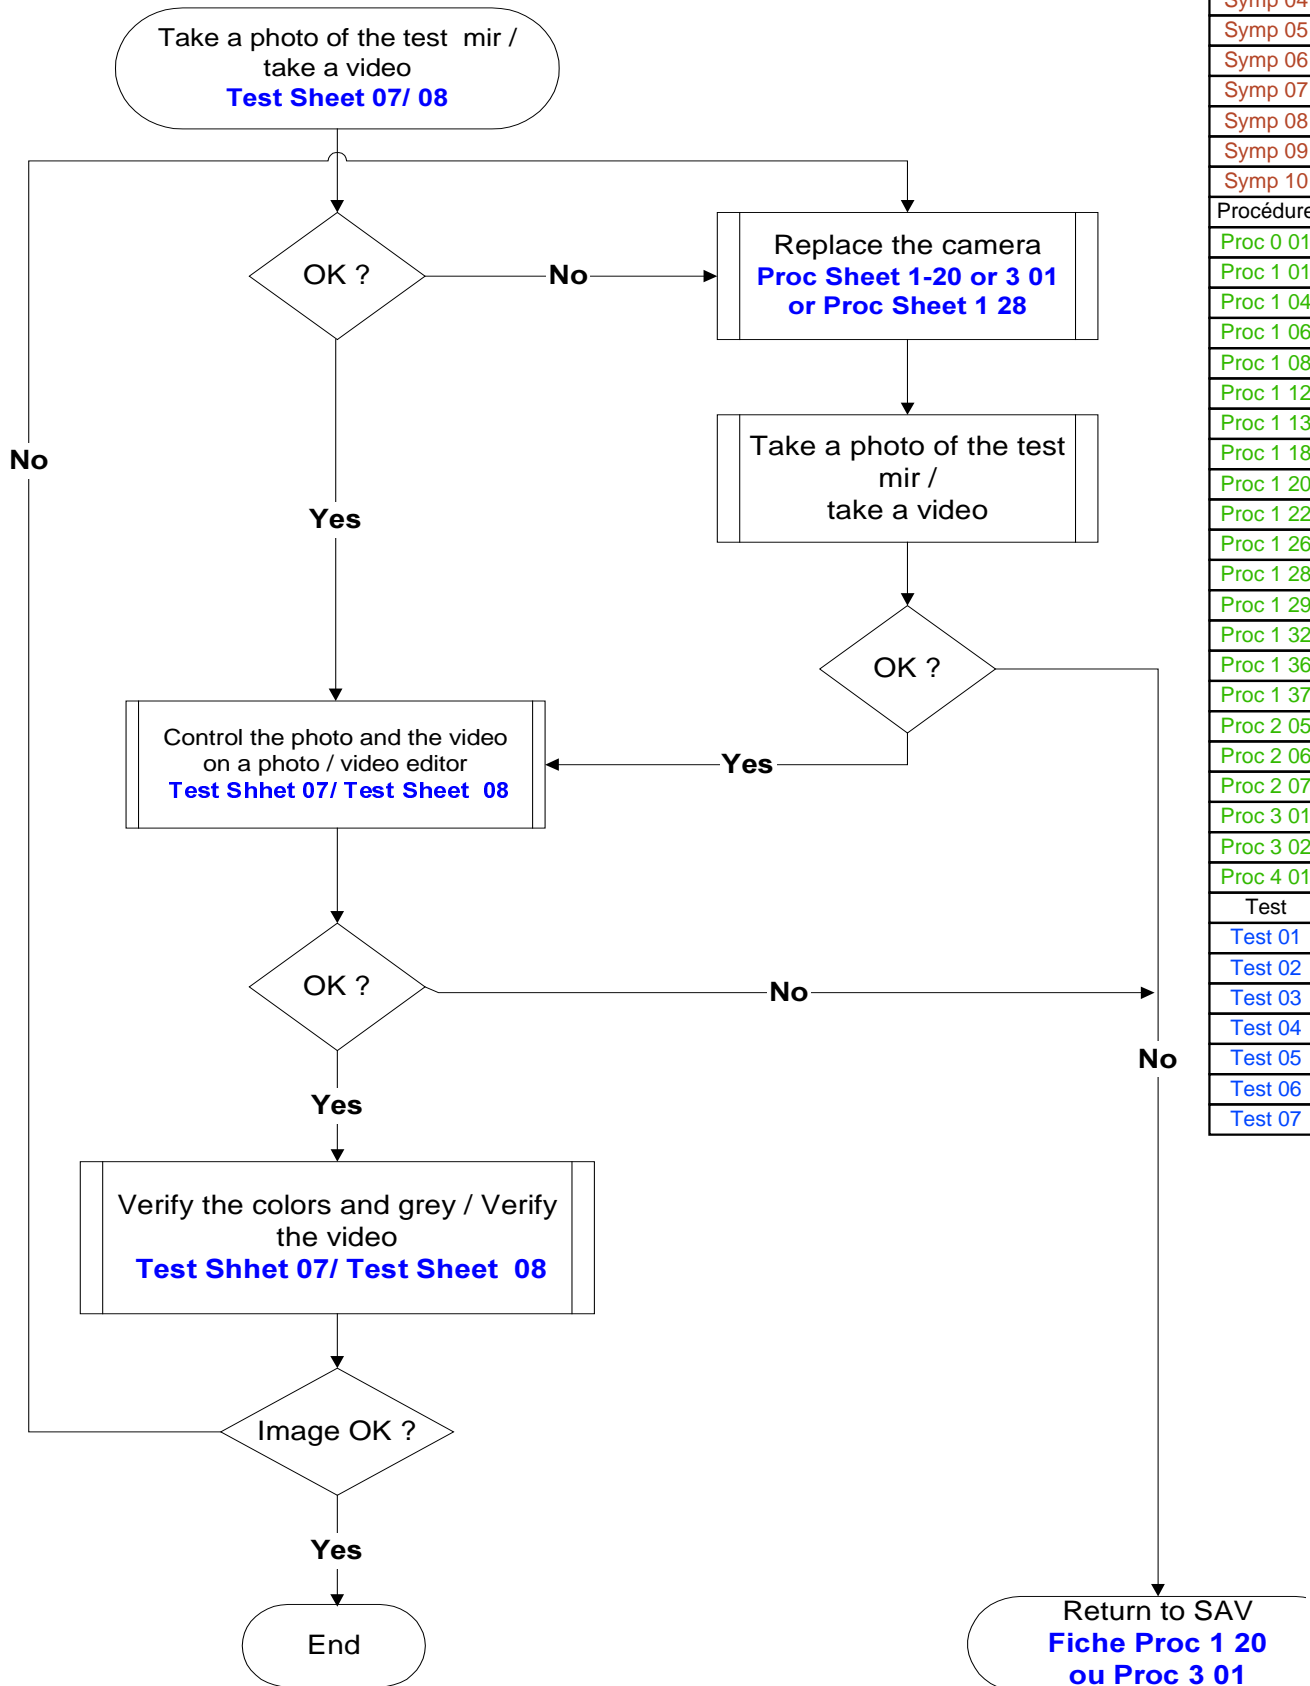

Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

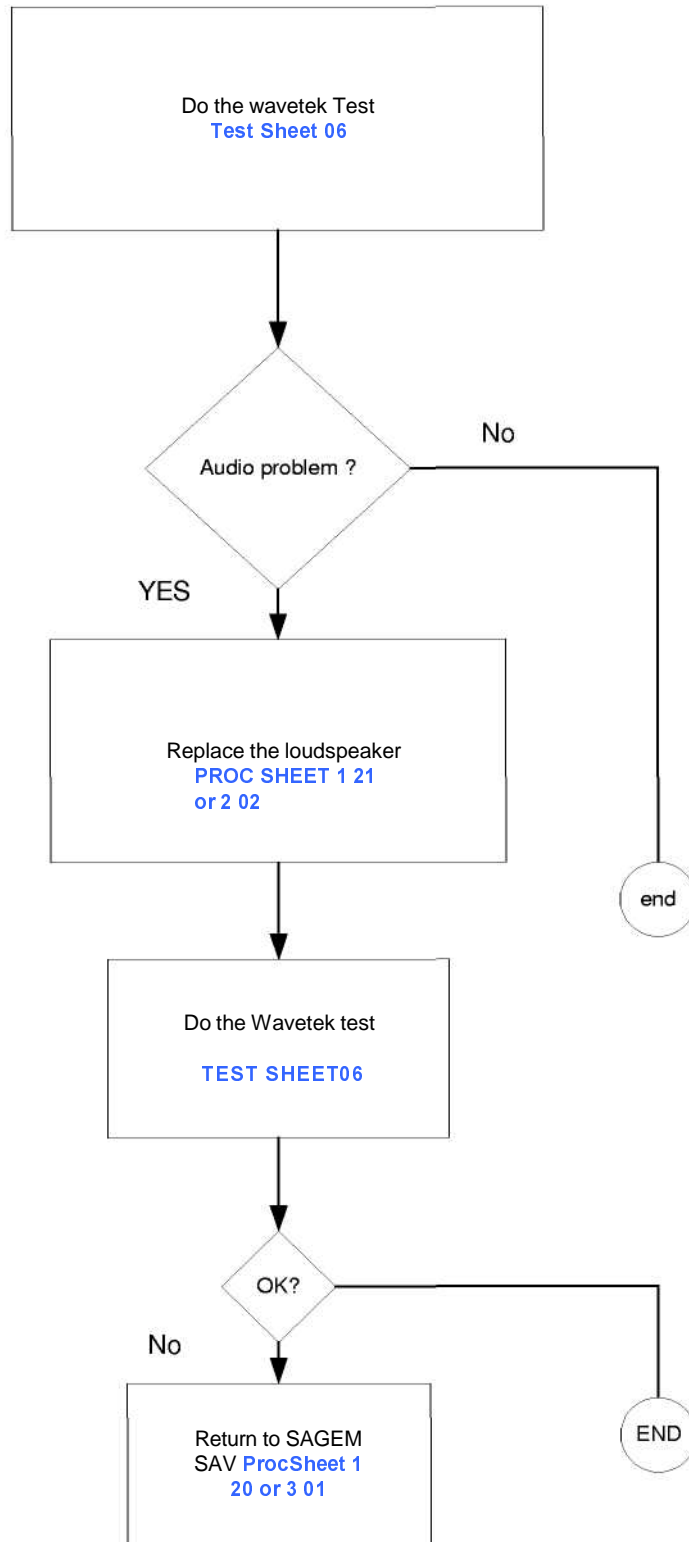

## CHAPTER 4 - TESTS AND CHECKS

### 4.1 ABOUT TESTS

Tests and checks are made after the troubleshooting procedures (chapter 3) and before the maintenance procedures (chapter 5).

They are broken down into modules and are sorted by types of confirmed faults. The user must be equipped with special test tools in order to carry out the tests.

### 4.2 TEST TOOLS

The references of SAGEM tools, listed hereafter, are given in Appendix 1 : Composition table.

The following test tools are necessary :

- the ARC downloading kit, including the test case provided with:
  - the data cable (to PC),
  - the retrofit cable,
  - the mains power supply module.
  - Retrofit adapter
- the radio test bench, provided with:
  - SIM card of test.
  - myC5-2m, myC5-2v calibration tool
  - Adjustable regulate power supply 0-15V / 4A
  - Wavetek 4107
- CADEX C7000 / C7200 / ASTRATEK with myC3-2 adapter
  - Charger test kit
  - Voltmeter (minimum impedance : 20 KW per Volt in DC)
  - Amperimeter
- an IMEI labels printing station, including :
  - Printer,
  - Roll of labels,
  - Connecting cable for PC (parallel printer cable),
  - Printing software,

### 4.3 INSTALLING ON A WORKSTATION

#### 4.3.1 Minimum required configuration

The minimum configuration of the workstation is :

- Processor 1Ghz,
- 128 Mbytes of RAM,
- Windows 2000, Windows XP,
- 2.1 Gbytes hard disk (1 Gbytes available),
- 1 parallel port and 2 serials port.
- USB port.
- Network card, sound card.

### 4.3.2 Installing the ARC downloading kit

The ARC downloading kit interfaces the SMT software with the phone to be repaired.

- Connect the 9-pin SUB-D connector to the PC serial port (COM1).
- Connect the power supply module to the mains power outlet.
- Connect the phone to be repaired to the system connector.


### 4.3.3 SMT functions

The SMT maintenance software can:

- Download new software if needed
- Configure default values and checks them.
- Unblocked the " PHONE CODE "
- Delete the customer directory and SMS
- Print identification labels.
- Make a electronic board swap.
- Adjust the display contrast
- Read the Site Technical Documentation ( manual of repair)
- Select a test sequence

The procedures for using these functions are described in TEST Sheet 01.

# TEST SHEETS

	<b>TEST AND CHECK BY SMT</b>	<b>TEST SHEET 01</b>
myC5-2m, myC5-2v		1/7

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

To run the functions described below, run the SMT application from the desktop icon.

**Notice:** The active connection with SMT ( via the serial port ), validates in itself the data functionality of the handset.

**Download the latest software**

1. Click on the DOWNLOAD button.
2. Follow the procedures on the screen.
3. Make sure that the mobile phone is not in standly mode (press the Start key)

The serial port of the PC is connected well, and that the port COM was well selected ( pop-up menu TOOLS then CHANGE OF PORT COM )

**Configure and check default values**

4. Click on the CONFIGURE pop-up menu and then VERIFY (Verfab).
5. Follow the procedures on the screen.

**Release the " PHONE CODE"**

6. In the case when phone code was programmed by the user.
7. Click on the CONFIGURE pop-up menu and then on RELEASE
8. Follow the procedures on the screen.

**Print identification labels**

9. Click on the LABEL pop-up menu and then PRINT LABEL .
10. Follow the procedures on the screen ( type the date of fabrication ).

**SMT SEQUENCE: Series of the different functions under SMT ( sequence of tests)**


1. Click on SMT SEQUENCE pop-up menu.
2. Select the different functions you want to carry out then click on the LAUNCH button.

▪ **Electronic board swap**


11. Carry out the exchange of a defective card by SWAP card
12. Follow the procedures on the screen.

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10


**1. SWAP : Electronic board Configuration**

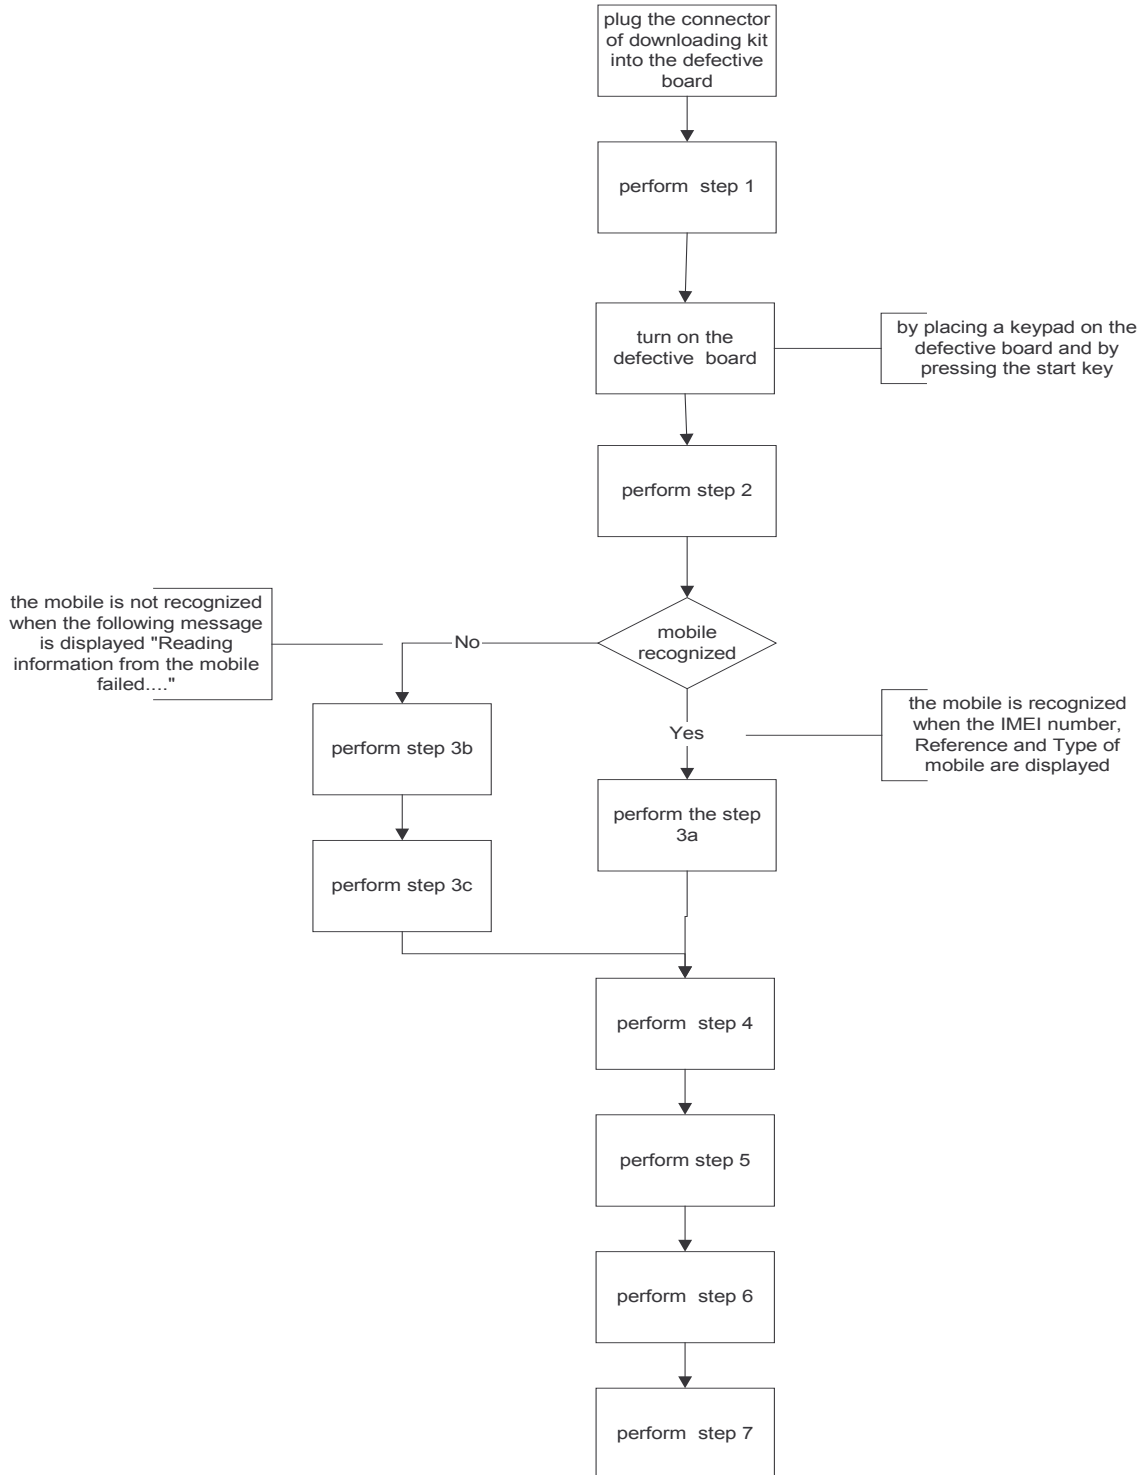




	<b>TEST AND CHECK BY SMT</b>	<b>TEST SHEET 01</b>
myC5-2m, myC5-2v		3/7


**Step 1**  
**SMT Front page**  
**Click on the « SWAP Process » menu.**  
**Example**

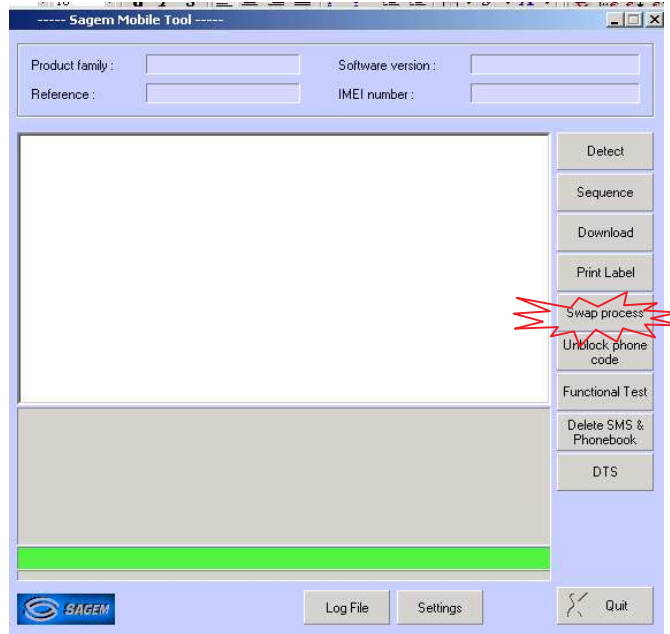

The following screen appears :

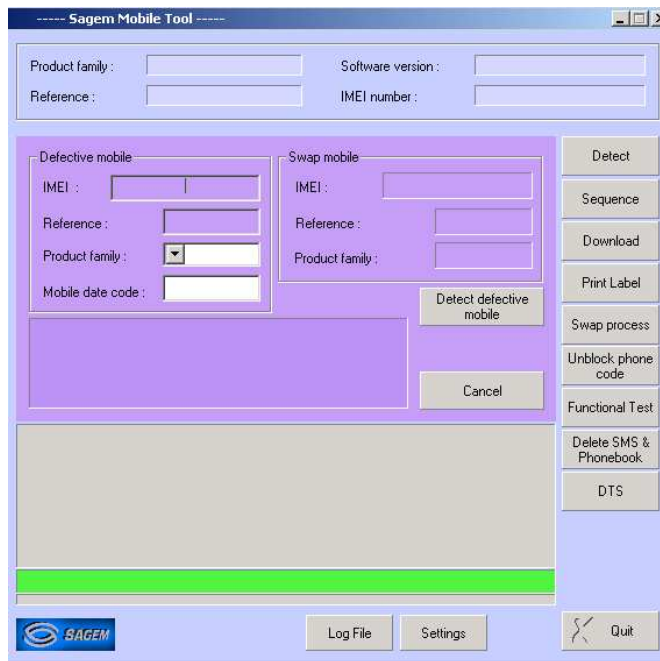


Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

	<b>TEST AND CHECK BY SMT</b>	<b>TEST SHEET 01</b>
myC5-2m, myC5-2v	4/7	


**Step 2**

Please click on « Detect defective mobile » button

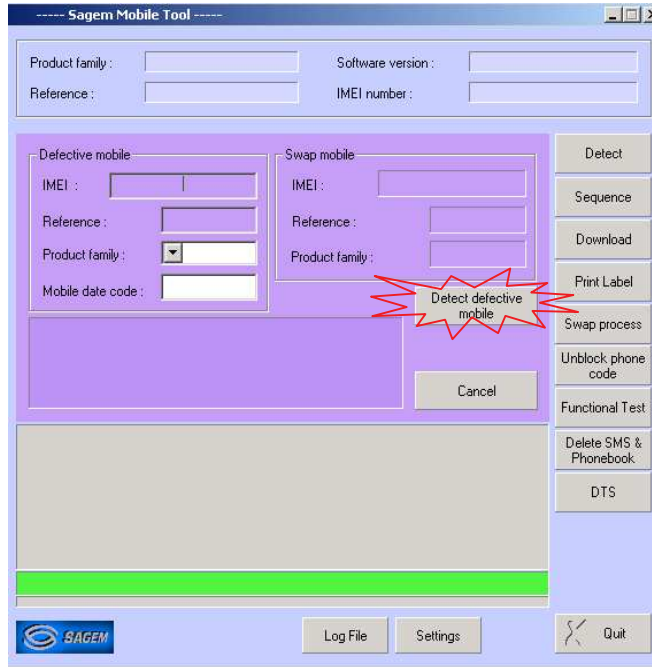

**Step 3a**


The following screen appears : the mobile is recognized. Then, enter the mobile date code

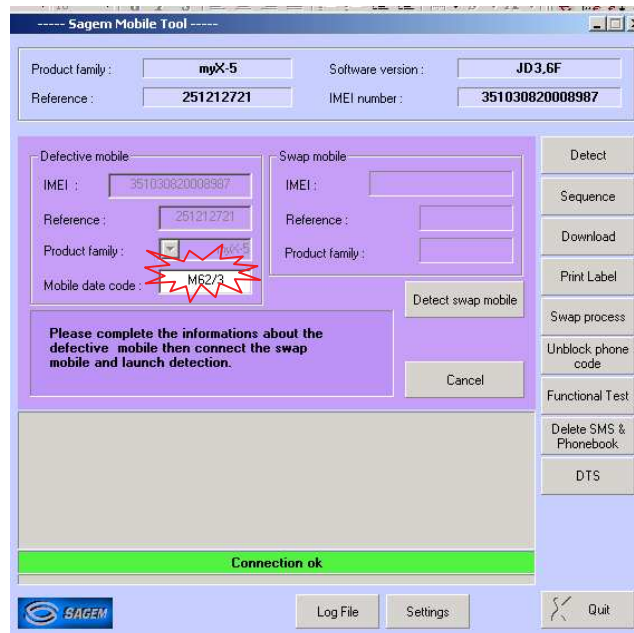


Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10


Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Step 3b**  
If this screen appears, the mobile is not recognized.

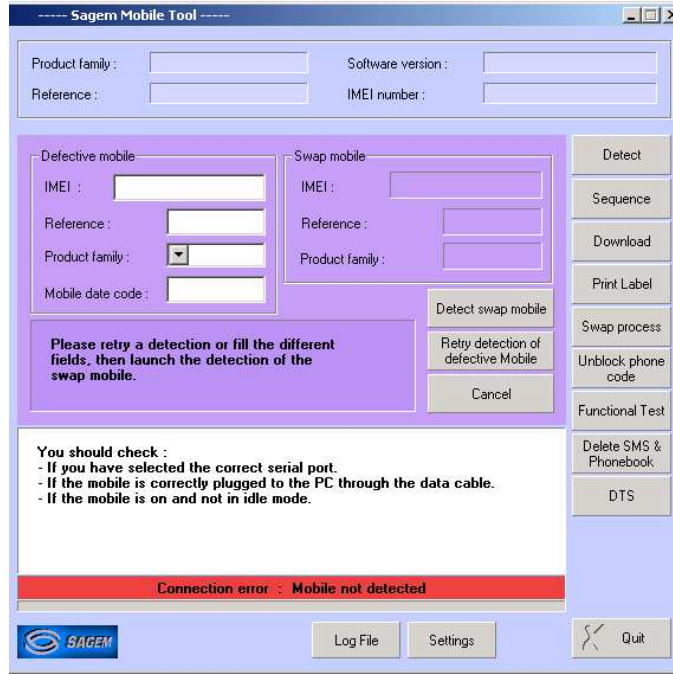


**Step 3c**  
You must fill in the blanks requested according to the information written on the production label

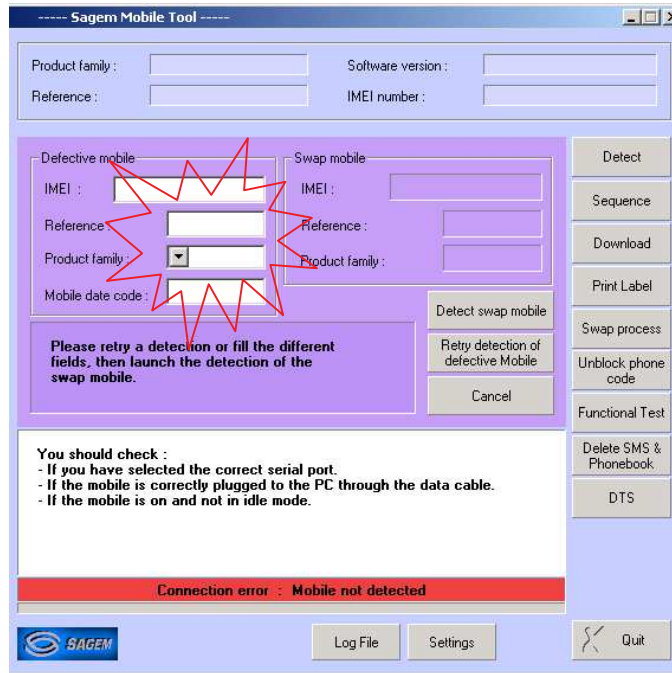

	<b>TEST AND CHECK BY SMT</b>	<b>TEST SHEET 01</b>
myC5-2m, myC5-2v		6/7


**Step 4**

**Plug in and switch on the new mobile, then push on the “Detect Swap mobile” button**

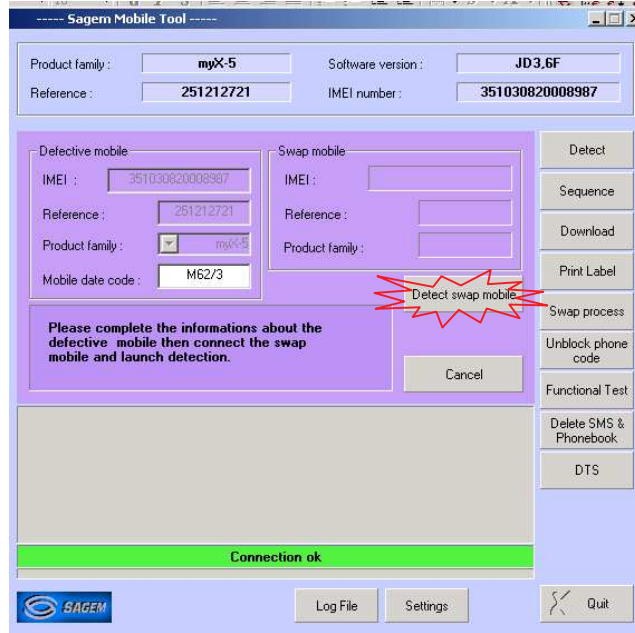


**Step 5**

**After clicking on “OK”, SMT prints the label which will be used to close the ESD bag of the defective board.**

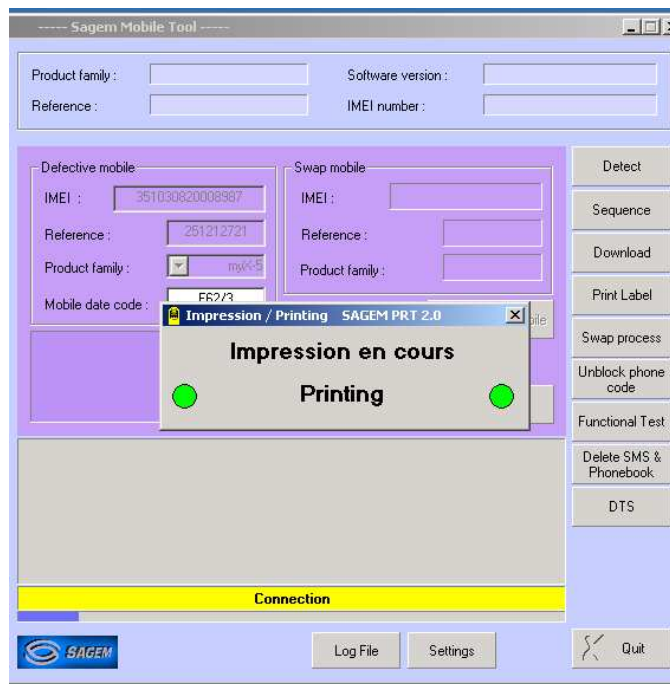


Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10


	<b>TEST AND CHECK BY SMT</b>	<b>TEST SHEET 01</b>
myC5-2m, myC5-2v		7/7

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10


**Step 6**  
**The downloading is stats if the mobile needs to be updated**

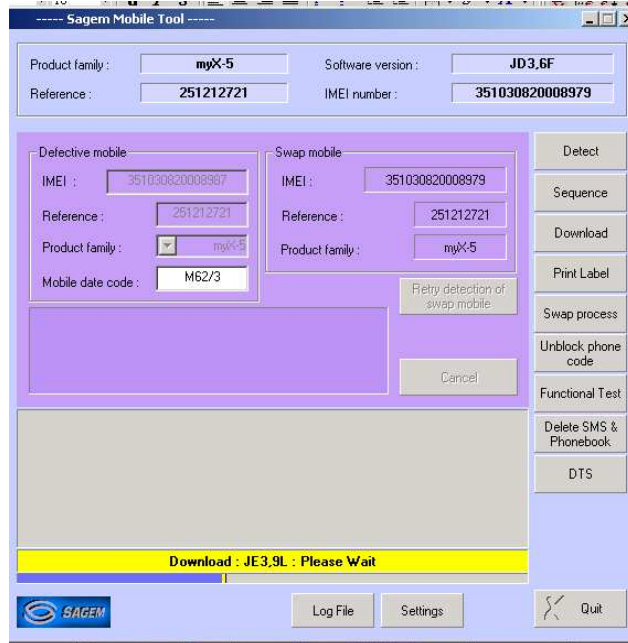

**Etape 7**  
**SMT opens the following screen to print the new label : please dial the “MAKING DATE” (Production date) written on the label of the defective mobile.**  
**Then stick the new label on the functional mobile**

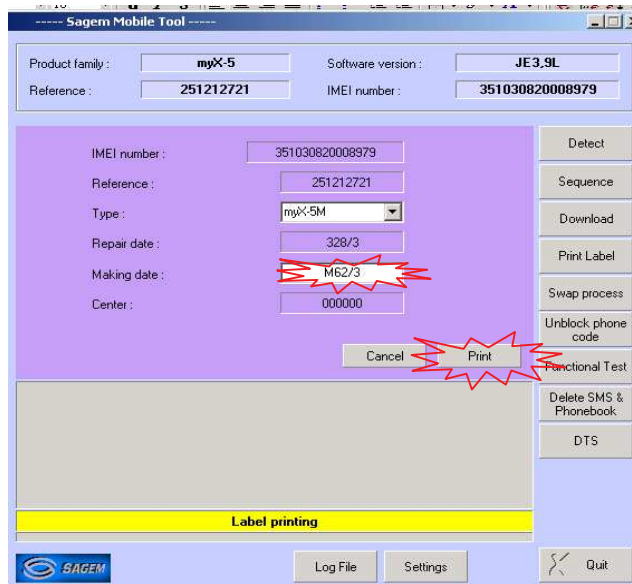

**The swap board sequence is completed.**

	<b>CHARGER TEST</b>	<b>TEST SHEET 02</b>
myC5-2m, myC5-2v		1/1

Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>
Procédure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>

**Test description**

This test checks the various battery chargers.

**Required tools**

- a voltmeter (minimum impedance 20 kΩ per Volt in DC),
- two sockets for banana connectors for connection to the voltmeter,
- the charger test kit.

**Test procedure**

Two terminals are used for measurements on the charger test kit


- red (+),
- black (-).

A pushbutton selects the measurement :

- No charge (released position),
- Under Charge (pushed in position).

1. Check the charger connector visually.
2. Connect the charger to be tested to the back of the tester.
3. Connect the voltmeter using the two banana connectors.
4. Before starting any other measurement, check that the charger is correctly powered (main voltage is in accordance with the charger specifications).
5. Make the two measurements.
6. Check the recorded values using the following board. If the values are not included in the min & max limits , then the charger is defective.

	NO Charge (released position)		Under Charge (Pushed in position)	
	Min.	Max.	Min.	Max.
Charger				
Travel 500 mA	5,5 V	7,5 V	2V	4V
Simple 300 mA	9V	15V	1,5 V	4V
cigar lighter	5,5 V	7,5 V	2V	4V

	<b>BATTERY TEST</b>	<b>TEST SHEET 03</b>
myC5-2m, myC5-2v		1/1

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Test description**

This test allows to test the various batteries.


**Required tools**

- CADEX C7000 / C7200 / ASTRATEK
- Battery adaptors,
- Amperometer interface
- a voltameter (minimum impedance 20 kΩ per Volt in DC).

**Test procedure**

1. Insert battery on ammeter interface
2. Measure the identification resistor between the Z poles :
  1. Li-Ion batteries : **120kΩ (tolerance = 117kΩ - 123kΩ**, according to the surrounding temperature)
  2. Measure the battery voltage between the V poles
    - a) If the voltage < 2.5 Volts the battery is defective
    - b) if the voltage < 4v ,load the battery for 30 minutes with a travel charger and measure the internal resistance with a CADEX or ASTRATEK battery tester
    - c) If the voltage > 4V measure the internal resistance with a CADEX or ASTRATEK battery tester

**Notice:** Choose on the battery tester ,the battery type (Li-ion) ,the nominal battery voltage (3,6V) and the battery capacity (1000 mA)
- 5 Read the result :If the internal resistance < 300 mOhms the battery is **OK**  
=> 300 mOhms the battery is **defective**

	<b>CONSUMPTION TEST</b>	<b>TEST SHEET 04</b>
myC5-2m, myC5-2v		1/1

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Test description**

This test tests the battery consumption.

**Required tools**

- Universal Batteries Adapter FlexArm (for batteries all Sagem series)
- An Ammeter.

**Test procedure**

Measurement when switched off

1. Insert the handset (switched off) onto the tool (customer phone and battery).
2. Connect the ammeter to the tool between A poles:  
Red tool terminal on the ammeter "**COM**" or "**GND**" terminal.  
Black tool terminal on the ammeter "**+**" terminal.

**NOTE: The ammeter rating must be set to DC (DC or =), range 100 mA.**


3. If the value indicated exceeds 1 mA ,the mobile is defective.

Measuring the charge

4. Insert the handset (switched off) onto the tool (customer phone and battery).
5. Connect the ammeter to the tool between A poles:  
Black tool terminal on the ammeter "**COM**" or "**GND**" terminal.  
Red tool terminal on the ammeter "**+**" terminal.  
**NOTE: The ammeter rating must be set to DC (DC or =), range 1 A.**
6. Connect the customer's charger when energised (after connecting the charger to the mains power supply).
7. If the value indicated is lower than 150 mA ,the mobile is defective.

**NOTE: When changing the ammeter rating (manual or automatic), the mobile can be disconnected.**



	<b>HOTLINE MENU</b>	<b>TEST SHEET 05</b>
myC5-2m, myC5-2v		1/1

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Access to the "HOTLINE" menu**

**NOTE:** "Hotline" menu is accessible with a valid SIM card

Access to the "HOTLINE" menu is possible with a powered up mobile.


The "HOTLINE" menu is accessed by pressing on the "menu" key and then the \* key (long press).

Enter the corresponding code (in bold) to choose the menu to be viewed.

To go out the "HOTLINE" menu, press successively on the **C** key to return to the operational screen of the mobile.

**Description of handset "HOTLINE" menu**

- APPLICATION
  - VERSION: reads the installed software version and the IMEI code.
  - BATTERY: gives the value of the battery voltage.
  
- PROM : Not used.
  
- SIM LOCK : accesses the "SIM LOCK" menu (password required).
  
- LCD TEST
  - BLACK : displays the screen in black.
  - WHITE SCREEN
  - RED SCREEN
  - GREEN SCREEN
  - BLUE SCREEN
  - WHITE DRAUGHTBOARD
  - FOR PHOTO : displays functions on the screen to take a photo.
  - VIBRATING DEVICE : tests the vibrating device.
  - And LED (if the handset has this fonction)

	<b>RADIO TEST</b>	<b>TEST SHEET 06</b>
myC5-2m, myC5-2v		1/2

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Test description**


This test evaluates handset radio fonction during a call.

**Required tools**

- a Wavetek or other network simulation tools.
- a radio golden sample.
- an adjustable regulated power supply 0-12V / 4A

**Installation**


RF test

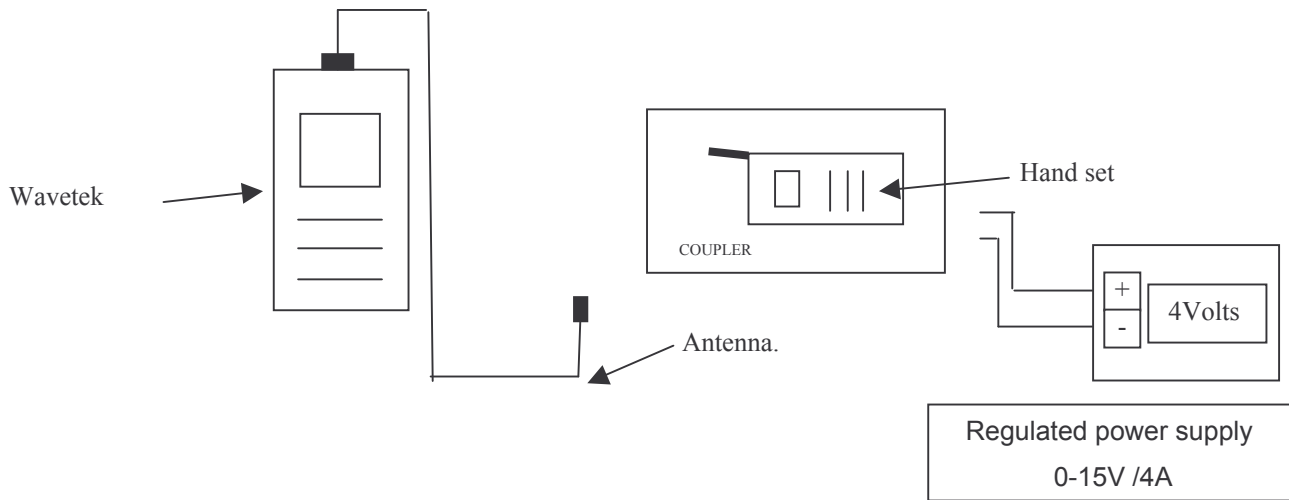

**Calibration process**

1. Position the calibration tool on the radio interface (1) (provided with a SIM test card)
2. Press the start key on the network simulation tool.
3. And press on "AUTOTEST".
4. Choose the corresponding program using the "UP" et "DOWN" arrows.
  - Mobile : **XXXXXXX**
  - Frequency range : **GSM, DCS ,PCS (if used),**
  - Coupling type : **Antenna.**
5. Press "ENTER" and wait until the end of the calibration.
6. Follow the instructions shown on the Wavetek.
7. Compare the network simulation tool result with the calibration report.
8. If there are any differences, adjust the network simulation tool. (we can have a difference of 0,5 bB )
9. Do the calibration process (point 5) again, to be sure the calibration is correct.


**Remark** : You must do a radio calibration each week, if you receive any handsets during that week.

	<b>RADIO TEST</b>	<b>TEST SHEET 06</b>
myC5-2m, myC5-2v		2/2

**Test procedure**

1. Position the handset on the radio interface (1) (provided with a SIM test card)
2. Switch it on and Switch on the Wavetek (or other network simulation tool) and press on "AUTOTEST".
3. Choose the corresponding program using the "UP" et "DOWN" arrows.
  - Mobile : Mobile reference.
  - Frequency range : **GSM, DCS ,PCS (if used),**
  - Coupling type : **Antenna .**
4. Press "ENTER" and wait until the end of the calibration.
5. Follow the instructions shown on the Wavetek (or other simulation tool).

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

	<b>PHOTO TEST</b>	<b>TEST SHEET 07</b>
myC5-2m, myC5-2v		1/1

Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07
Procédure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10

**Test description**

This test evaluates the functioning of the handset photo function.

**Required tools**

- The SAGEM test chart reference
- A USB data link
- Pictures and sounds transferring software from handset to PC (“My pictures and sounds.exe “ available on [www.planetsagem.com](http://www.planetsagem.com))
- A JPEG files publishing software

**Test precautions**

- Camera function test has to be done in a luminous environment**
- Select the high resolution mode in the Settings / Photo / Size menus**
- **The lens must be clean .if not cleaned with a lint free wipe**

**Test procedure**

- Put handset at about 30 cm from the colour test chart in order to visualize test chart entirely (inactive zoom). (Pattern for camera test : 251349685)
- Take photo by pressing on the dedicated key.
- Save the photo in the mobile.
- Link handset with the data link (serial / USB/ IRDA), download the picture (by means of My Pictures and sounds software ) to the computer.
- Open picture file by means of a JPEG editor.
- Check the Colour / grey gradation presence

**Remarks:** This test aims at verifying that the camera functions correctly.  
**Result disparities, being able to be obtained by different situations (computer screen / ambient lighting / distance ...), do not allow to confirm a qualitative judgment of the photo.**

# CHAPTER 5 - MAINTENANCE PROCEDURES

## 5.1 TECHNICAL WORK LEVELS

There are four technical work levels:

- Level 0,
- Level 1,
- Level 2,
- Level 3.

Each level represents a maintenance degree that depends on which elements are to be removed.

Note: Presence or use on the radiotelephone of non genuine element (material and software) leads automatically the exclusion from SAGEM warranty

## 5.2 SHORT LOOP PROCESS

### 1. Initialisation

From the communication by Sagem and the reception of the concerned products by the short loop process, the Repair Centre shall comply with the above procedure. The application of the Short loop process will end when received the authorisation of repairing given by Sagem.

### 2. Administrative checks to be done by the Repair Centre

- Authorisation from Sagem for treating the reference received (Part number)
- Process to be applied : short loop process or normal process (DTS, Normal, etc...). The Repair Centre shall check if the product received has to be treated according to the short loop process.
- Controls on the warranty conditions and DOA conditions (if the Repair Centre is authorised) communicated by Sagem.

### 3. Tests and controls :

- Checks if there are no external shocks or oxidation marks ( the covers shall be dismantled in case of exchangeable covers)
- Checks and confirmation of the defect (real call with SIM, functional test keypad , display, vibrating device, etc...)
- Check the concordance between the defect declared by the end-user and the defect observed
- Call back of the end-user or dealer (as far as possible) either in case of misunderstanding of the defect declared by the end-user or in case of the non observation of the defect. (see the appendix "Additional information about the No Fault Found –NFF-> at the end of this document allowing according to the case to understand the return of the product)

If any doubts occurred concerning out of warranty products received, the Repair Centre shall send to Sagem Montauban (with knowledge to the Area Manager and Support Engineer) the photo of the defect.

N.B :

- The handsets shall not be dismantled (by using screwdrivers) except previous request from Sagem.

- The Repair Centre will not make any Repair (such as spare parts exchange or software upgrade) except previous communication of Sagem. The exchanges of handsets or accessories are the only intervention authorised.

#### 4. Exchange by the Repair Centre

- The Repair Centre will use the products delivered for swap to the Repair Centre for exchanging the products to the end-users (except particular process defined by Sagem).

- The under- warranty handsets and accessories received shall be exchanged to the end-user.

- The under- warranty handsets and accessories declared No Fault Found (NFF) shall be exchanged to the end-users except previous communication of Sagem.

- The Out of warranty handsets and accessories (oxidation, shocks, ...) will be repaired by the Repair Centre after acceptance by the customer of an estimate according to the Sagem out of warranty repair prices communicated.

- The under- warranty and out of warranty handsets shall be sent to Sagem Montauban.

- In the frame of the Short loop process, there is no level 1 (L1) intervention

#### 5. Reports

An exchange of an handset and its accessories shall be codified Level 3 (L3)

An accessory exchange shall be codified Level 0 (L0).

The Repair Centre shall capture all the information required for issuing and sending the Repair Reports and Status reports according to the Contractual frequency defined. The Reports shall includes the products treated by the Repair Centre under- warranty or out of warranty.

#### 6. Procedure

From the beginning date of the Short loop process application and minimum each week, the Repair Centre shall ship the products (handsets and accessories) to Sagem Montauban.

##### 6.1. Handsets :

- MRA Procedure for the after-Sales products ( one MRA number for the products concerned by the short loop).

- MRA Procedure for DOA products ( one MRA DOA number for the products concerned by the short loop) if the Repair Centre is authorised to treat the DOA products.

The MRA request shall be sent to Sagem Montauban (with knowledge to the Area Manager and Support Engineer).

The shipment of products to Sagem Montauban shall comply with the MRA procedure. Furthermore each products shall be sent with the Return Product Sheet filled in indicating the defect declared by the end-user and the defect observed by the Repair Centre (Sagem Defect codes).

The NFF products sent to Sagem Montauban shall be identified by using separate package. Furthermore this products shall be sent with the complete description of the defect declared by the end-user ( not codified).

The accessories received by the Repair Centre shall be sent to Sagem Montauban sent back

attached with the handset ( not connected to the handset).

## 6.2. Accessories :

For the accessories received without the handsets, the procedure is the following:

Accessories return procedure to Sagem Montauban to be used. The Repair Centre shall indicate on the parcel Accessories + model (ex : myC 3-2) for the accessories received in the Repair Centre without the handsets.

## 7. Sagem Montauban

Sagem Montauban will ship back to the Repair Centre the same quantity of handsets and accessories as the quantity received.

## 8 Additional information about the no fault found

In any case: Ask to the end-user the frequency of the defect and the circumstances of its apparition (during an incoming or out-going call, while playing, while downloading, etc.). Try to answer the questions: Where? When? How?

- If the customer complains about a "Power supply / charging" failure : (shutting down of the mobile, problem of booting, etc.);
  - o During which operation ? In which circumstances ?
  - o What is the state of the battery and the charger before shipment to the repair centre ?
 If the mobile shuts down by itself, must he enter his code pin, adjust the date and the hour when rebooting the phone?

- If the customer complains about a communication problem:
  - o What are his residence zone and the reception level of the mobile (Number of receipt bar);
  - o What is the state of the battery when the defect appears?
  - o In case of loss of communication :
    - § With or without total extinction of the mobile?
    - § Does the loss of communication occur always in the same place and with the same person?
      - § Does the loss of communication occur while browsing in the menus, during the communication, or during playing or downloading?

- If the customer complains about a problem of blockage of key of the keyboard:
  - o In which circumstances does the problem occur?
  - o Did he activate the keypad locking ?
  - o Did he change or remove the upper cover ?
  - o Which are the non functioning keys ?

## 5.3 MAINTENANCE TOOLS

The following tools are necessary to carry out maintenance operations :

- Gloves
- Soldering iron
- metal dome positioning fixture MC2004+  
Code : 252434032




- Upper housing MC2004+  
Code : 251825859





## LEVEL 0 MAINTENANCE

	<b>Remove and Place</b>	Proc Sheet 0 01
myC5-2v, myC5-2m	<b>The battery</b>	1/1

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**Tools :**

- Not applicable.

Risk of the procedure :

- Damage the spurs of preservation battery.
- Damage the battery cover.

**Preliminary operation :**

Switch off the mobile phone.


**Removal procedure :**

1. Position the mobile as indicated ( 1 ).
2. Remove the battery by pressing the battery lock and pulling the cover downward ( 2 ).
3. Remove the battery by pulling and lifting it up to the notch ( 3 ).


**Placement procedure :**

1. Place the battery by positioning the bottom first then press down the top until it is flat ( 4 ).
2. Position the battery cover by sliding on the mobile.

1

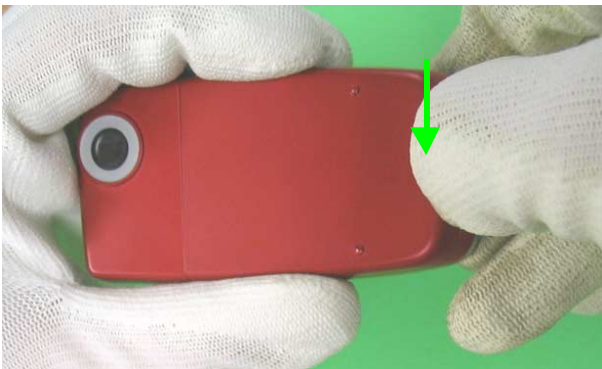

2

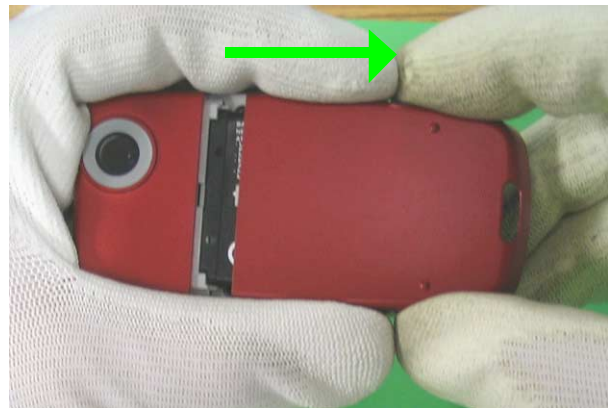


3



4



## LEVEL 1 MAINTENANCE

	<b>Remove and Place</b>	Proc Sheet 1 01
myC5-2v, myC5-2m	<b>Mobile lower housing.</b>	1/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**Risk of the procedure :**

- Damage the screw of fixation.
- Damage the lower housing.
- Damage the clips of the lower housing.

**Tools :**

- Cross shaped screwdriver.
- Plectrum.
- Upper housing myC5-2 fixture of PN SAGEM **25182585-9** Identification **27800313-2**.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).

**Removal procedure :**

1. Remove the four fixing screws from mobile lower housing ( 1 ).
2. Lift delicately the lower housing beginning with the bottom to its complete removal ( 2 ).
3. Remove mobile lower housing.


**Placement procedure :**

1. Place the top of mobile lower housing in the flat. Then put the bottom in place until the assembly is complete ( 3 ).
2. Position the mobile on the tool and screw to **0.06NM +/- 0.01NM** the four fixing screw ( 1 ).

**Further Operation :**

2. Place the battery ( [Proc Sheet 0 01](#) ).



 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Fiche Proc 1 01
myC5-2v, myC5-2m	<b>Mobile lower housing.</b>	2/2

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07


**1**




**2**



**3**

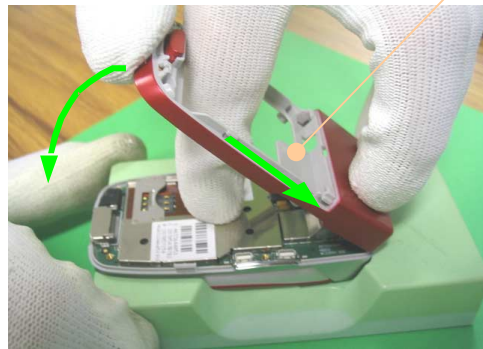

Lower casing of mobile.

	<b>Remove and Place</b>	Proc Sheet 1 04
myC5-2v, myC5-2m	<b>The keypad</b>	1/1

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

**Tools :**

- Gloves.
- Plectrum.
- Upper housing myC5-2 fixture of PN SAGEM **25182585-9** Identification **27800313-2**.

Risk of the procedure :

- Damage the keypad.
- Damace the FPC LCD.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).

**Removal procedure :**

1. Take off the MMI II using the plectrum making level control ( 1 ).
2. Remove the keypad of it place ( 2 ).

**Placement procedure :**

1. Place the keypad in it place ( 2 ).
2. Re place the MMI II of the place ( 1 ).

**Further operation :**

1. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
2. Place the battery ( [Proc Sheet 0 01](#) ).


**1**



**2**



Numeric Keypad

	<b>Remove and Place</b>	Proc Sheet 1 06
myC5-2v, myC5-2m	<b>Mobile lower housing conductive foam.</b>	1/1

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

**Tools :**

- Gloves.
- Plectrum.
- Upper housing fixture myC5-2 of PN SAGEM **25182585-9** Identification **27800313-2**.

Risk of the procedure :

- Damage the numeric keypad.
- Damace the FPC LCD.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove the lower casing of mobile ( [Proc Sheet 1 01](#) ).

**Removal procedure :**

1. Remove the MMI II using the plectrum ( 1 ).
2. Remove the MMI II from it flat ( 2 ).
3. Remove the conductive foam ( 3 ).

**Placement procedure :**

1. Place the keypad in it place ( 2 ).
2. Re place the MMI II in it place ( 1 ).
3. Place the conductive foam in their place ( 3 ).


**Further operation :**

1. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
2. Place the battery ( [Proc Sheet 0 01](#) ).

**1**




**2**

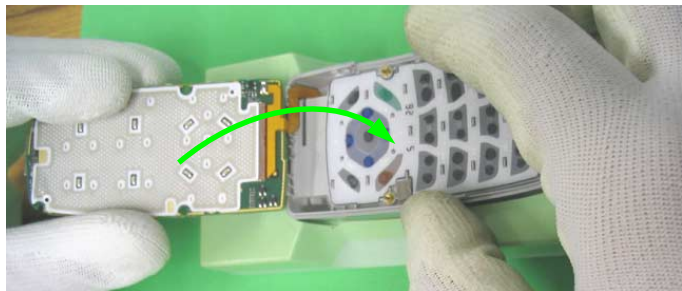


**3**

Conductive Foam

**4**

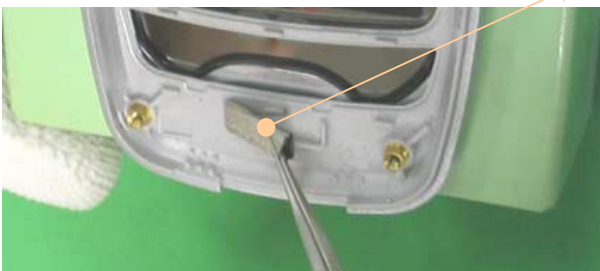

	<b>Remove and Place</b>	Proc Sheet 1 08
myC5-2v, myC5-2m	<b>metal dome</b>	1/1

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

**Tools :**

- Tweezers.
- Soldering iron.
- Gloves.
- Boxwood stick.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032**

Risk of the procedure :

- Damage the FPC connector.
- Damage the lateral key.
- Damage the components of the MMI II..

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove the volume control key ( [Proc Sheet 1 22](#) ).
4. Remove equipped electronic board ( [Proc Sheet1 18](#) ).

**Removal procedure :**

This procedure must be performed by a technician with gloves to avoid any risk.

1. Take the metal dome ( 1 ) with the boxwood stick paying attention not to break any component.
2. Remove the metal dome ( 2 ).


**Placement procédure :**

**Warning :** The metal dome is not reusable, it must be replaced by a new metal dome, unless the board is swapped and sent as level 3.


1. Stick a new metal dome ( 1 ) on the MMI II ( 2 ) using the metal dome positioning fixture.

**Further operation :**

1. Place equipped electronic board ( [Proc Sheet1 18](#) ).
2. Place the volume control key ( [Proc Sheet 1 22](#) ).
3. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
4. Place the battery ( [Proc Sheet 0 01](#) ).

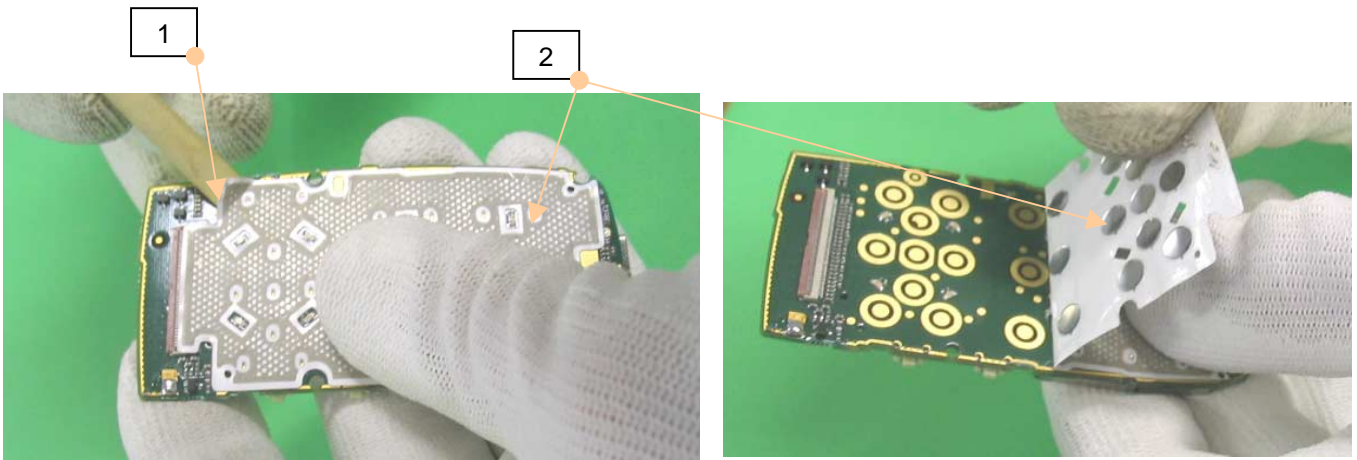



	<b>Remove and Place</b>	Proc Sheet 1 12
myC5-2v, myC5-2m	<b>FLAP big window.</b>	1/1

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**this operation must be made after license SAGEM.**

Risk of the procedure :

- Score the lower casing of the FLAP.

**Tools :**

- Tweezers.
- Upper housing myC5-2 fixture PN SAGEM **25182585-9** Identification **27800313-2**.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Remove lower housing of the FLAP ( [Proc Sheet 1 26](#) ).

**Removal procedure :**


1. Press the window inside out to pull it out from the FLAP lower housing ( 1 ).
2. Take out the window and it adhesive ( 2 ).


**Placement procédure :**

1. Position the window ( 3 ) and stick it on FLAP lower housing ( 4 ).

**Further operation :**

1. Place lower housing of the FLAP ( [Proc Sheet 1 26](#) ).
2. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
3. Place the keypad ( [Proc Sheet 1 04](#) ).
4. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
5. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
6. Place the battery ( [Proc Sheet 0 01](#) ).

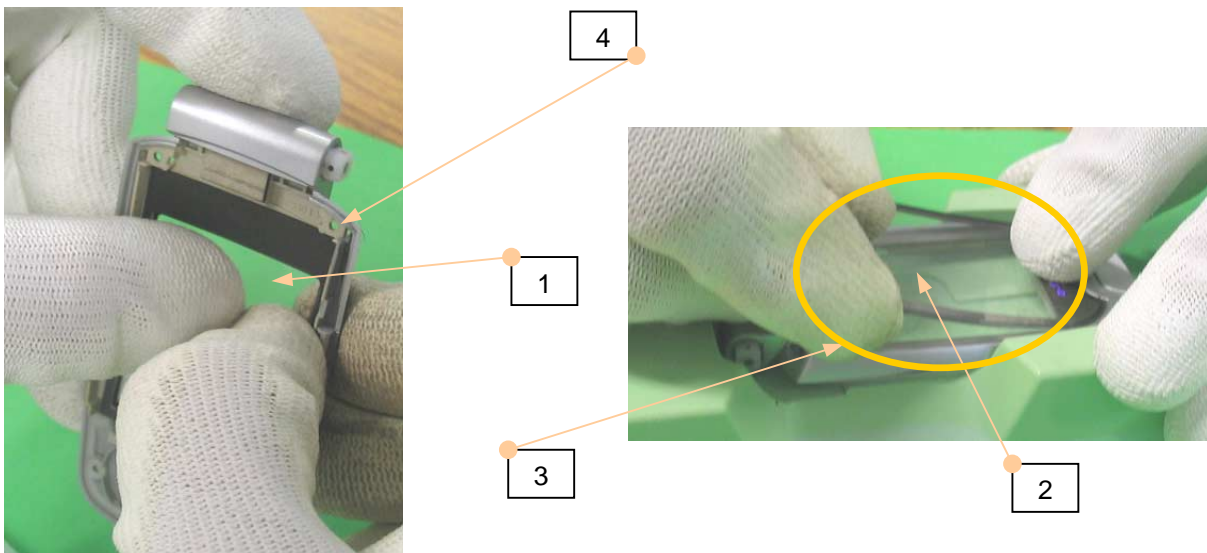

 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Proc Sheet 1 13
myC5-2v, myC5-2m	<b>Mobile upper housing.</b>	1/2

Risk of the procedure :

- Damage the FPC.
- Damage mobile upper housing.
- Damage the FLAP.

**Tools :**

- Gloves.
- Equipment to remove the hinge PN **25208133-6** Tools of desolidarisation FLAP.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove the volume control key ( [Proc Sheet 1 22](#) ).
4. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
5. Remove the keypad ( [Proc sheet 1 04](#) ).

**Removal procedure :**

1. Use the FLAP disassembly to press the hinge ( 1 ) to separate the FLAP from the mobile upper housing ( 2 ).
2. Take off the FPC ( 3 ).


**Placement procédure :**

1. Insert the FPC in mobile upper housing ( 3 ).
2. Position the FLAP on the new mobile upper housing ( 4 ).
3. Press the hinge ( 5 ) to put the FLAP in the upper housing of mobile.


**Further operation :**


1. Place the keypad ( [Proc Sheet 1 04](#) ).
2. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
3. Place the volume control key ( [Proc sheet 1 22](#) ).
4. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
5. Place the battery ( [Proc sheet 0 01](#) ).

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Proc Sheet 1 13
myC5-2v, myC5-2m	<b>Mobile upper housing.</b>	2/2

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

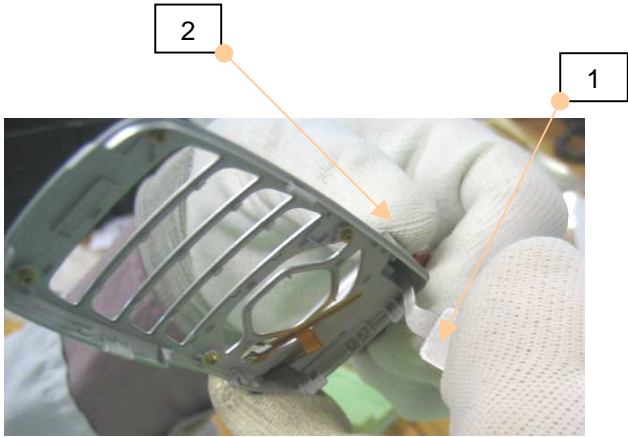

	<b>Remove and Place</b>	Proc Sheet 1 18
myC5-2v, myC5-2m	<b>equipped electronic board ( MMI II )</b>	1/2

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

**Tools :**

- Cross shaped screwdriver
- Tweezers
- Plait to be unsoldered
- Iron soldering

**Risk of the procedure :**

- Score the lower and upper casing.
- Damage the FPC LCD.
- Lose the audio rubber.
- Lose the camera rubber.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove the volume control key ( [Proc Sheet 1 22](#) ).

**Removal Procedure :**


1. Remove the MMI II using the plectrum ( 1 ).
2. Remove the MMI II from it area ( 2 ).
3. Unsoldered the FPC of the MMI II ( 3 ) by means a plait to be unsoldered.
4. Lift up the lock of the connector ( 4 ).
5. Remove delicately the FPC of the FLAP on the MMI II.
6. Remove the MMI II.

**Placement procedure :**

1. Connect the FLAP FPC to the equipped electronic board ( 4 ).
2. Apply flux on the soldering pad and solder the FPC on the MMI II ( 3 ).
3. Lock ( 4 ) the FPC of the FLAP.
4. Position the MMI II on the flat ( 2 ).
5. Carefully place the MMI II in the mobile.

**Further operation :**

1. Place the volume control key ( [Proc Sheet 1 22](#) ).
2. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Place the battery ( [Proc sheet 0 01](#) ).


 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Proc Sheet 1 18
myC5-2v, myC5-2m	<b>equipped electronic board ( MMI II ).</b>	2/2

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07


**1**




**2**

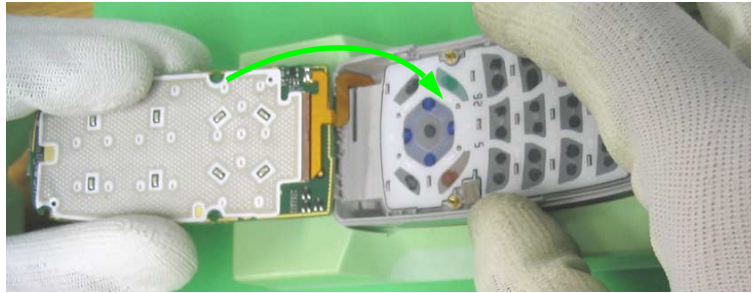


**3**

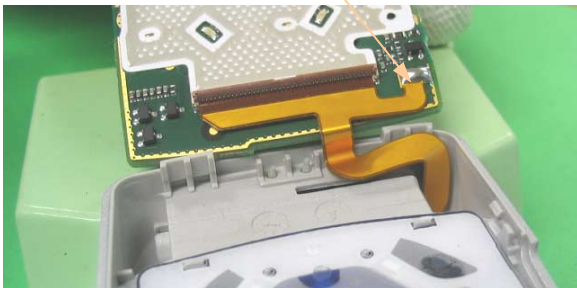

**4**

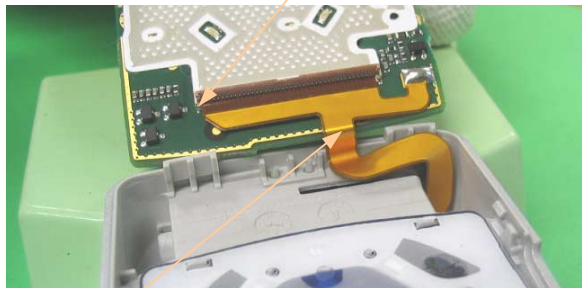

FPC LCD

	<b>Equipped electronic board exchange</b>	Proc Sheet 1 20	Procedure
myC5-2v, myC5-2m		1/3	Proc 0 01 Proc 1 01 Proc 1 04 Proc 1 06 Proc 1 08 Proc 1 12 Proc 1 13 Proc 1 18 Proc 1 20 Proc 1 22 Proc 1 26 Proc 1 28 Proc 1 29 Proc 1 32 Proc 1 36 Proc 1 37 Proc 2 05 Proc 2 06 Proc 2 07 Proc 3 01 Proc 3 02 Proc 4 01 Symptom Symp 01 Symp 02 Symp 03 Symp 04 Symp 05 Symp 06 Symp 07 Symp 08 Symp 09 Symp 10 Test Test 01 Test 02 Test 03 Test 04 Test 05 Test 06 Test 07

**Preliminary operation**

1. Control of the IMEI label integrity
2. Remove the equipped electronic board (**Proc sheet 1 18**)
3. Control of any oxidation marks (on the equipped electronic board and under the metal dome)

**Return procedure :**

- (a) The equipped electronic boards are packaged in individual electrostatic envelopes. They must be stocked in their original package of reception , to insure a good protection against external attacks (see enclosed photos)
- (b) During the equipped electronic boards manipulation , gloves and electrostatic strap must be worn at all times.
- (c) The defective equipped electronic boards have to be returned to SAGEM factory, packaged individually, in the original package (see enclosed photos) , in the appropriate ESD box : One box per Sagem reference (check reference written on the box).
- (d) The defective board should display the defect code written on a sticker (placed on the shielding) and written on the ESD bag label too (printed with SMT).

**Note :**


- **On the defective boards , it is necessary to check visually under the metal dome to discover if it shows oxidation marks. The defective boards should be returned with their original metal dome**
- **Boards with oxidation should not to set in conformance with the warranty**
- **The defective boards must never be mixed with the complete mobiles**

**Placement procedure :**

1. Take a board in the stock of swap boards from the same Sagem reference.

**Further operations :**

1. Place the new equipped electronic board on the assembly plate. .(**Proc sheet 1 18**)
2. Follow stages ( see enclosed photos)

	<b>Equipped electronic board exchange</b>	Proc Sheet 1 20
myC5-2m, myC5-2v		2/3

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

Example of equipped electronic boards packaging :



Equipped electronic board with metal dome and microphone

ESD shielding bag

Humidity absorber

Boards packaging SAGEM -> ARC

Boards packaging ARC -> SAGEM



ESD shielding bag closed by the product label



ESD shielding bag closed by the IMEI label


Write the defect code on the label



SAGEM electrostatic shielding box  
Reference 20 boards: 25 141059-6  
Reference 100 boards: 25 141060-3

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

**Electronic board exchange process**

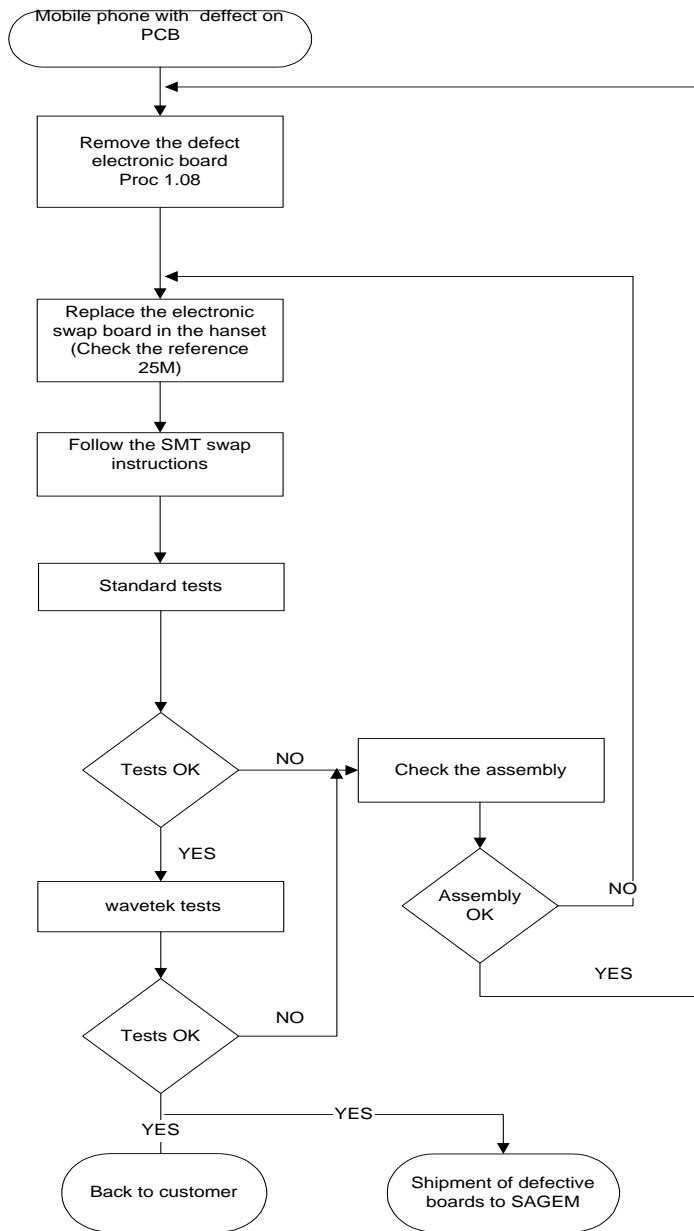

Detection of N3 defect : See the Technical documentation

-Check oxidation under the metal dome .


- Audio parameters written on the new swap board

- Display test : Hot Line Menu  
- Keypad test  
- Vibrating device test

- See Technical documentation (test sheet 05)

- Follow return instructions page 5-31



	<b>Remove and Place</b>	Proc Sheet 1 22
myC5-2v, myC5-2m	<b>volume control key</b>	1/1

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

Risk of the procedure :

- Be careful not to place the volume control key in the bad way.

**Tools :**

- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).

**Removal procedure :**


1. Remove the volume control key ( 1 ) from its area ( 2 ).


**Placement procedure :**

1. Position the volume control key ( 1 ) into its area. Position the bigger side on the left ( 3 ).

**Further operation :**

1. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
2. Place the battery ( [Proc Sheet 0 01](#) ).

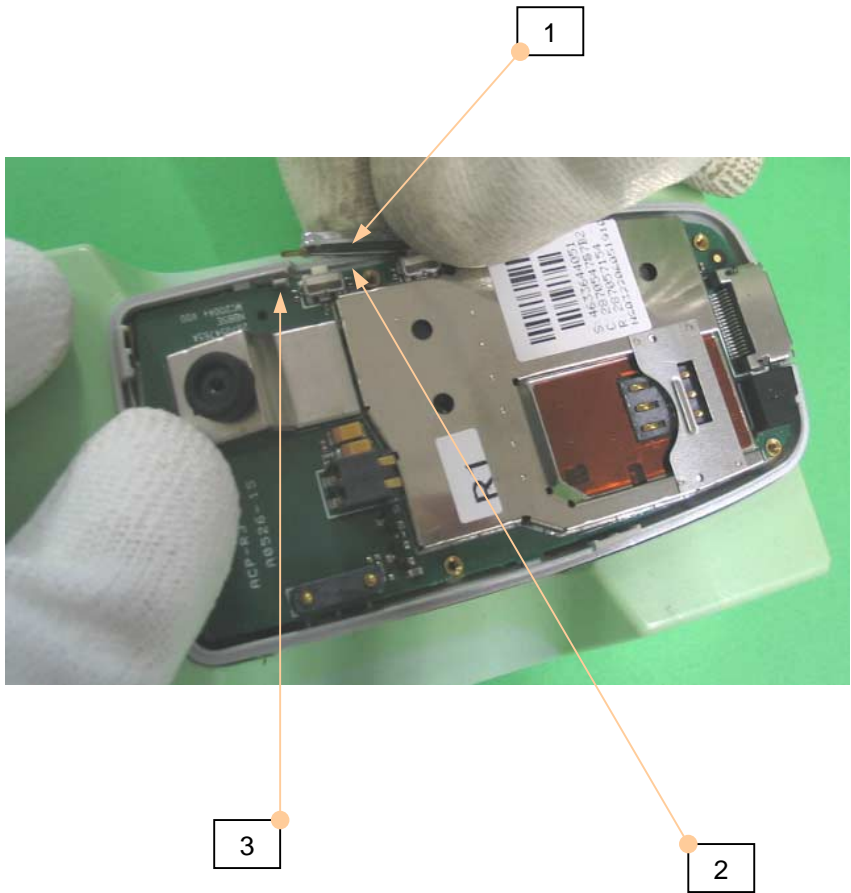

	<b>Remove and Place</b>	Proc Sheet 1 26
myC5-2v, myC5-2m	<b>FLAP lower housing.</b>	1/2

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

***This operation must be made after license SAGEM.***

Risk of the procédure :

- Stripe the lower and upper housing of the FLAP.

Obligation of the procedure :

- **Change both two in one receiver and FPC when changing of the FLAP lower housing.**

**Tools :**

- Tweezers.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

***Preliminary operation :***

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc sheet 1 18](#) ).
4. Remove the keypad ( [Proc sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc sheet 1 13](#) ).
6. Remove FLAP upper housing ( [Proc sheet 1 32](#) ).
7. Remove the two in one receiver ( [Proc Sheet 2 05](#) ).
8. Remove the vibrator ( [Proc sheet 2 06](#) ).
9. Remove the Module LCD ( [Proc Sheet 2 07](#) ).

***Removal procedure :***


1. Remove the hinge of the lower casing of the FLAP ( 1 ).
2. Remove the foam of the upper casing of the FLAP ( 2 ).

***Placement procedure :***


1. Place the hinge on the lower casing of the FLAP ( 1 ).
2. Place the foam on the upper casing of the FLAP ( 2 ).


***Further operation :***

1. Place the module LCD ( [Proc Sheet 2 07](#) ).
2. Place the vibrator ( [Proc Sheet 2 06](#) ).
3. Place the two in one receiver ( [Proc Sheet 2 05](#) ).
4. Place FLAP upper housing ( [Proc Sheet 1 32](#) )
5. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Place the keypad ( [Proc Sheet 1 04](#) ).
7. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
8. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
9. Place the battery ( [Proc Sheet 0 01](#) ).

 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Proc Sheet 1 26
myC5-2v, myC5-2m	<b>FLAP lower housing.</b>	2/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

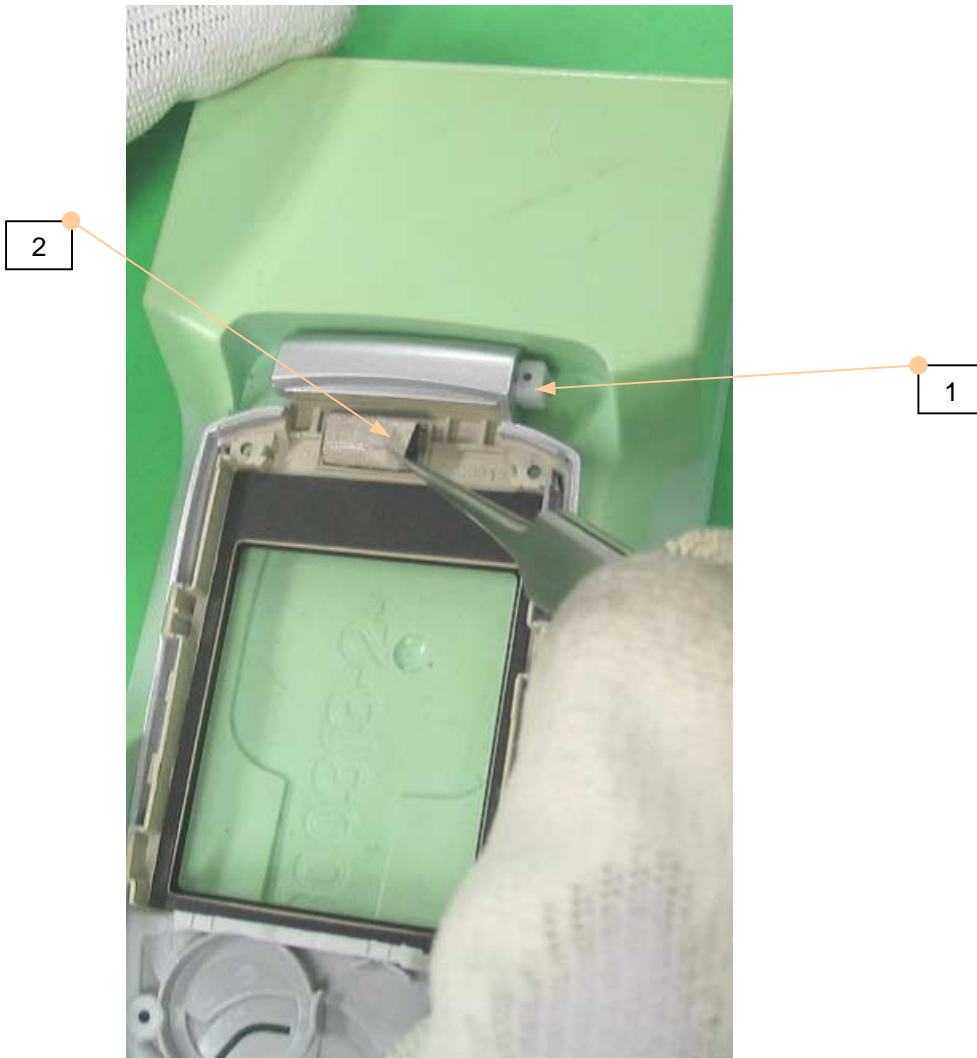

	<b>Remove and Place</b>	Proc Sheet 1 28
myC5-2v, myC5-2m	<b>The camera.</b>	1/1

Risk of the procedure :

- Damage the board to board connector.
- Damage the shield.
- Damage the MMI II components.

**Outillages :**

- Tweezers.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove the camera rubber ( [Proc Sheet 1 36](#) ).

**Removal procedure :**

1. Remove the shield ( 1 ) with make level control on point 2 and 3 of the shield ( 2 and 3 ).
2. Disconnect the camera ( 4 ) from the connector board to board ( 5 ).


**Placement procedure :**


1. Connect the camera ( 4 ) on the connector board to board ( 5 ).
2. Re place the shield on the camera ( 4 ).

**Further operation :**

1. Place the rubber camera ( [Proc Sheet 1 36](#) ).
2. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Place the battery ( [Proc Sheet 0 01](#) ).

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

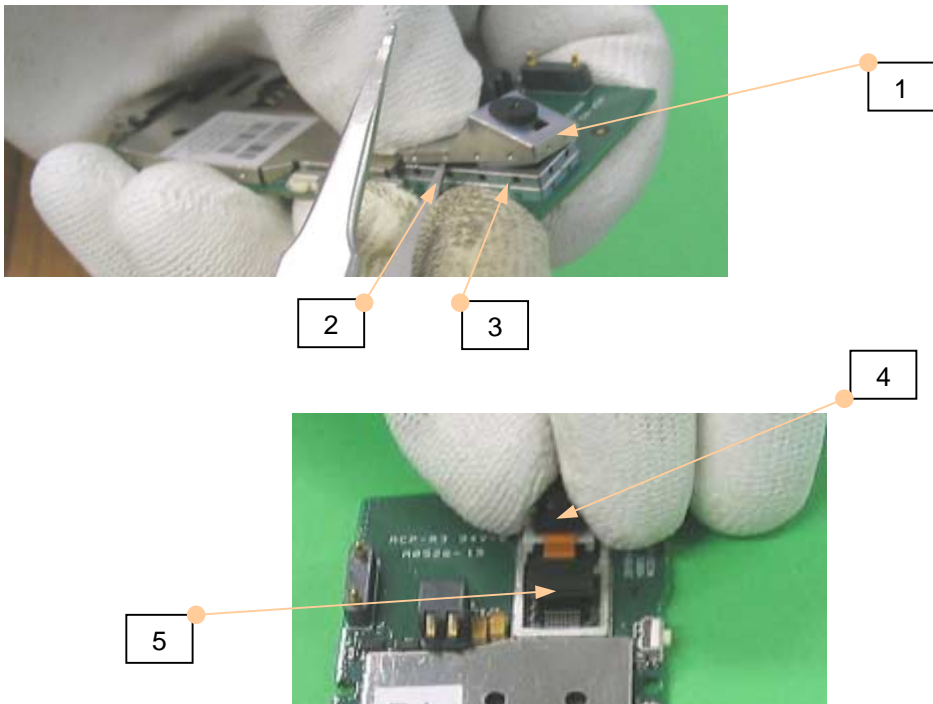

	<b>Remove and Place</b>	Proc Sheet 1 29
myC5-2v, myC5-2m	<b>The micro rubber</b>	1/1

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**Risk of the procedure:**

- Damage the electronic board.
- Oxydize the electronic board.
- Damage the micro.

**Tools :**

- Cross shaped screwdriver.
- Tweezers.
- Fixture to positioning the metal dome PN **NBSSE 20136375 SAGEM 252434032**.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).

**Removal procedure :**

1. Remove the micro rubber with hands or with a tweezers ( 1 ).


**Placement procedure :**


1. Place the micro rubber taking care to put it in the right way ( 1 ).

**Further operation :**

1. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
2. Place the battery ( [Proc Sheet 0 01](#) ).

**1**

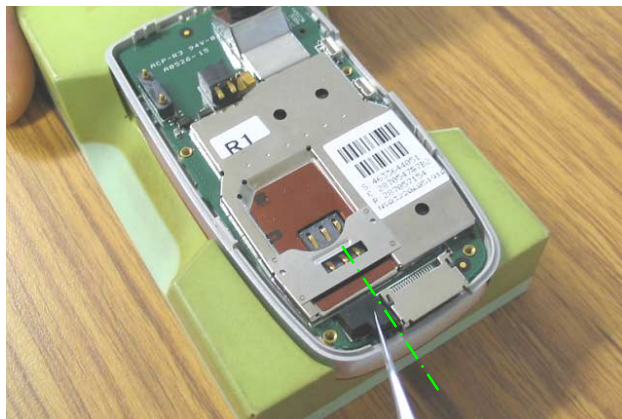

	<b>Remove and Place</b>	Proc Sheet 1 32
myC5-2v, myC5-2m	<b>FLAP upper housing.</b>	1/2

Risk of the procedure :

- Damage the FLAP housing.
- Damage the FPC.

**Outillages :**

- Tweezers.
- Cross shaped screwdriver.
- Fixture to positioning the metal dome PN **NBSSE 20136375 SAGEM 252434032**.
- Plectrum.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).

**Removal procedure :**

1. Remove the two screw cover ( 1 ) with tweezers.
2. Remove the left and right screw cover ( 2 ) with tweezers.
3. Remove the four fixing screw of the FLAP ( 3 ).
4. Lift delicately the upper casing of the FLAP beginning from the bottom until the complete removal ( 4 ).

**Placement procedure :**



1. Place the new assembled FLAP upper housing in its area, then press the bottom until the assembly is complete ( 5 ).
2. Position and screw : **0.08NM +/- 0.01NM** the four fixing screw ( 3 ).
3. Place the left and right FLAP screw cover ( 2 ).
4. Place the two flip stop of the FLAP ( 1 ).


**Further operation :**

1. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
2. Place the keypad ( [Proc Sheet 1 04](#) ).
3. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
5. Place the battery ( [Proc Sheet 0 01](#) ).

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

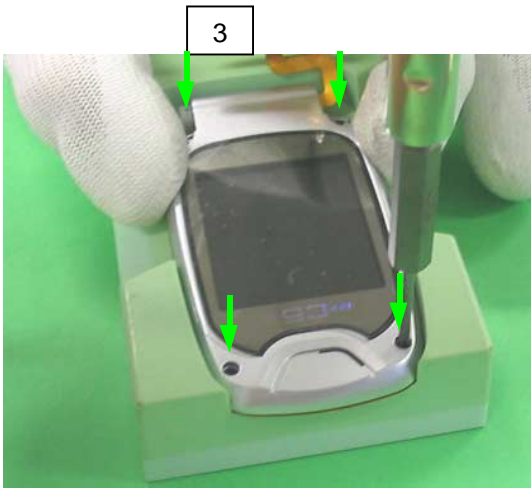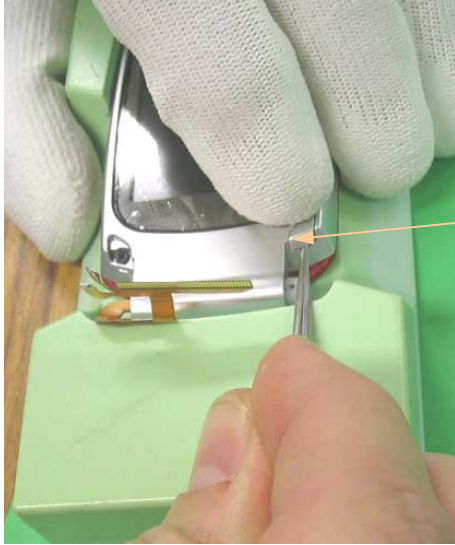

	<b>Remove and Place</b>	Proc Sheet 1 36
myC5-2v, myC5-2m	<b>The camera rubber</b>	1/1

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**Risk of the procedure :**

- Damage the electronic board.
- Oxydise the electronic board.
- Damage the micro.

**Tools :**

- Cross shaped screwdriver.
- Tweezers.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032**.

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).

**Removal procedure :**

1. Remove the camera rubber with hands or with a tweezers ( 1 ).


**Placement procedure :**

1. Place the camera rubber with hands or with a tweezers ( 1 ).


**Further operation :**

1. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
2. Place the battery ( [Proc Sheet 0 01](#) ).

**1**

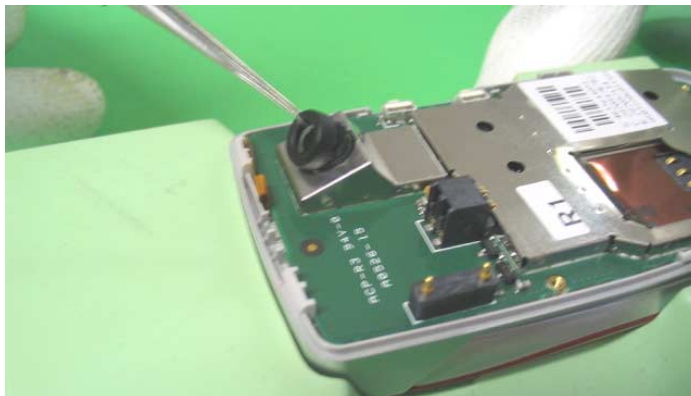



	<b>Remove and Place</b>	Proc Sheet 1 37
myC5-2v, myC5-2m	<b>FLAP small window.</b>	1/1

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

***This operation must be made after license SAGEM.***

Risk of the procedure :

- Stripe the FLAP upper housing.

**Tools :**

- Tweezers.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

**Preliminary operation :**

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Remove FLAP upper housing ( [Proc Sheet 1 32](#) ).

**Removal procedure :**


1. Press the window inside out to pull it out from the FLAP lower housing ( 1 ).
2. Take off the window and adhesive ( 2 ).

**Placement procedure :**


1. Position the window ( 3 ) and stick her on the upper casing of the FLAP ( 4 ).

**Further operation :**

1. Place FLAP upper housing ( [Proc Sheet 1 32](#) )
2. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
3. Place the keypad ( [Proc Sheet 1 04](#) ).
4. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
5. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
6. Place the battery ( [Proc Sheet 0 01](#) ).

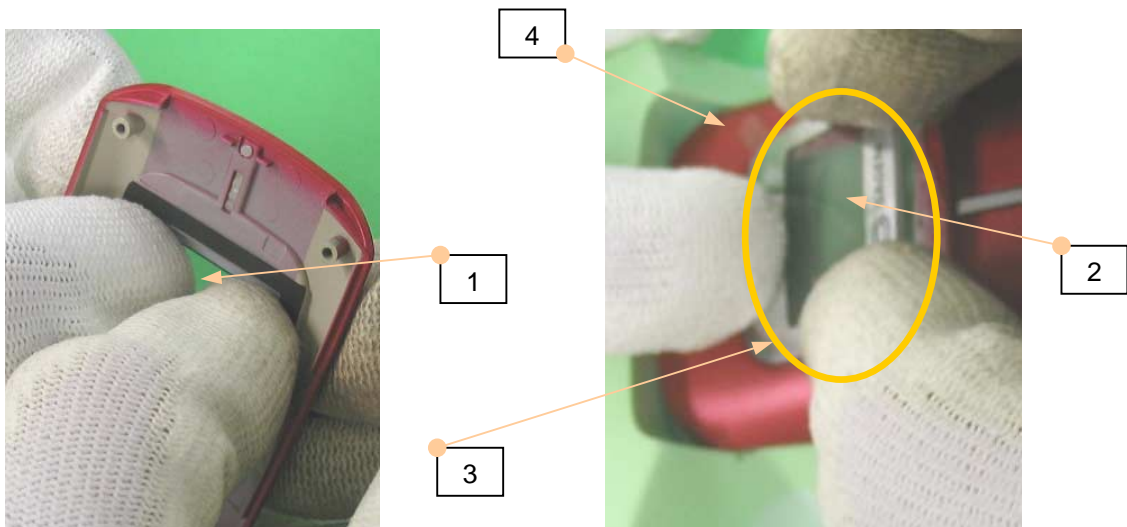

## LEVEL 2 MAINTENANCE

	<b>Remove and Place</b>	Proc Sheet 2 05
myC5-2v, myC5-2m	<b>two in one receiver.</b>	1/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

***This operation must be made after license SAGEM.***

Risk of the procedure :

- Stripe the lower and upper FLAP housing.

**Tools :**

- Tweezers.
- Soldering iron.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

***Preliminary operation :***

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Remove FLAP upper housing ( [Proc Sheet 1 32](#) ).

***Removal procedure :***

1. Disolder the two in one receiver ( 1 ).
2. Remove the two in one receiver ( 2 ) from the FLAP lower housing use level control with tweezers.


***Placement procedure :***

1. Solder a two in one receiver ( 1 ) and position the string of the two in one receiver in area ( 3 ).
2. Position the two in one receiver in its area ( 4 ).

***Further operation :***

1. Place FLAP upper housing ( [Proc Sheet 1 32](#) )
2. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
3. Place the keypad ( [Proc Sheet 1 04](#) ).
4. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
5. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
6. Place the battery ( [Proc Sheet 0 01](#) ).

Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

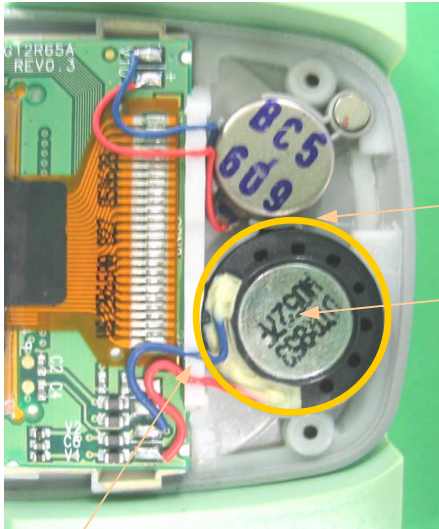


4

1

3

2



 <b>Sagem Communication</b> <small>SAFRAN Group</small>	<b>Remove and Place</b>	Proc Sheet 2 06
myC5-2v, myC5-2m	<b>The vibrator.</b>	1/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

***This operation must be made after license SAGEM.***

Risk of the procedure :

- Stripe the lower et upper FLAP housing.

**Tools :**

- Tweezers.
- Soldering iron.
- Metal dome fixture to positioning PN **NBSSE 20136375 SAGEM 252434032.**

***Preliminary operation :***

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Remove FLAP upper housing ( [Proc Sheet 1 32](#) ).

***Removal procedure :***

1. Disolder the vibrator ( 1 ).
2. Unstick the vibrator ( 2 ) from the FLAP lower housing making level control with tweezers.

***Placement procedure :***

1. Solder the vibrator ( 1 ) and position the string of the vibrator in the area overmold ( 3 ).
2. Position the vibrator in its area ( 4 ).

***Further operation :***

1. Place FLAP upper housing ( [Proc Sheet 1 32](#) ).
2. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
3. Place the keypad ( [Proc Sheet 1 04](#) ).
4. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
5. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
6. Place the battery ( [Proc Sheet 0 01](#) ).

myC5-2v, myC5-2m

**The vibrator.**

2/2


Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>




4

1

3

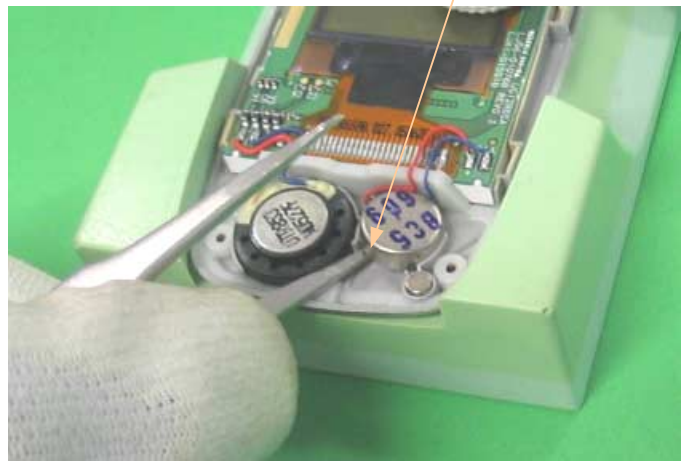

2

	<b>Remove and Place</b>	Proc Sheet 2 07
myC5-2v, myC5-2m	<b>The LCD module.</b>	1/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

***This operation must be made after SAGEM license.***

Risk of the procedure :

- Stripe the lower and upper housing.

Obligation of the procedure :

- **Change of the two in one receiver and the FPC if change FLAP lower housing.**

**Tools :**

- Tweezers.
- Metal dome positioning fixture PN **NBSSE 20136375 SAGEM 252434032.**

***Preliminary operation :***

1. Remove the battery ( [Proc Sheet 0 01](#) ).
2. Remove mobile lower housing ( [Proc Sheet 1 01](#) ).
3. Remove equipped electronic board ( [Proc Sheet 1 18](#) ).
4. Remove the keypad ( [Proc Sheet 1 04](#) ).
5. Remove mobile upper housing ( [Proc Sheet 1 13](#) ).
6. Remove FLAP upper housing ( [Proc Sheet 1 32](#) ).
7. Remove the two in one receiver ( [Proc Sheet 2 05](#) ).
8. Remove the vibrator ( [Proc Sheet 2 06](#) ).

***Removal operation :***

1. Remove the module LCD ( 1 ).
2. Take off the module LCD and its FPC from the FLAP lower housing ( 2 ).

***Placement operation :***

1. Place the new FPC on the module LCD ( 3 ).
2. Position the FPC of the module LCD ( 4 ) and then position the module LCD in its area ( 1 ).

***Further operation :***


1. Place the vibrator ( [Proc Sheet 2 06](#) ).
2. Place the two in one receiver ( [Proc Sheet 2 05](#) ).
3. Place FLAP upper housing ( [Proc Sheet 1 32](#) ).
4. Place mobile upper housing ( [Proc Sheet 1 13](#) ).
5. Place the keypad ( [Proc Sheet 1 04](#) ).
6. Place equipped electronic board ( [Proc Sheet 1 18](#) ).
7. Place mobile lower housing ( [Proc Sheet 1 01](#) ).
8. Place the battery ( [Proc Sheet 0 01](#) ).

myC5-2v, myC5-2m

**The LCD module.**

2/2

Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

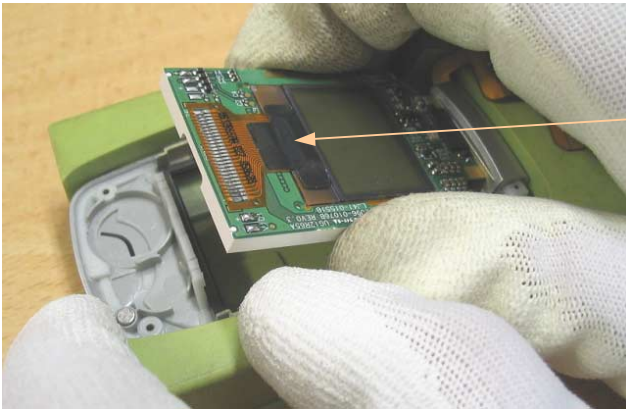


1



2

4

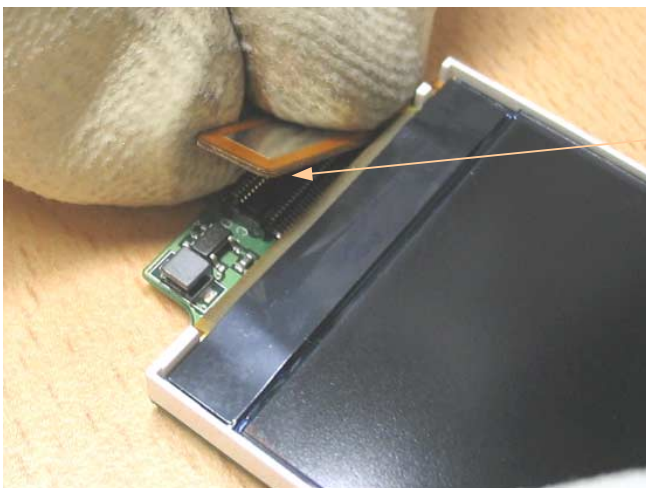

3



## LEVEL 3 MAINTENANCE

## **IMPORTANT**

### **Mobile packaging sent to SAGEM COMMUNICATION GROUPE SAFRAN :**

Follow the Proc Sheet 1 20


### **Packaging for swap or mobile components storage :**

The swap and the mobile components must be stored with a particular care especially for the most sensible component ( Display, loudspeaker etc .....)

**(Mandatory)**

This form must be attached around the defective mobile or the ESD bag containing the defective board:  
it must not be put inside the ESD bag.

Procedure
Proc 0 01
Proc 1 01
Proc 1 04
Proc 1 06
Proc 1 08
Proc 1 12
Proc 1 13
Proc 1 18
Proc 1 20
Proc 1 22
Proc 1 26
Proc 1 28
Proc 1 29
Proc 1 32
Proc 1 36
Proc 1 37
Proc 2 05
Proc 2 06
Proc 2 07
Proc 3 01
Proc 3 02
Proc 4 01
Symptom
Symp 01
Symp 02
Symp 03
Symp 04
Symp 05
Symp 06
Symp 07
Symp 08
Symp 09
Symp 10
Test
Test 01
Test 02
Test 03
Test 04
Test 05
Test 06
Test 07

ARC INFORMATION	
ARC Name .....	
ARC Adress.....	
ARC Country.....	
ARC Phone nr.....	
PRODUCT INFORMATION	
Warranty.....	<input type="checkbox"/> YES <input type="checkbox"/> NO
Product name.....	_____
Product reference.....	_____
IMEI.....	 * 3 5 1 2 3 1 2 3 1 2 3 0 0 0 0 *
Date of purchase.....	...../...../.....
Incoming date in ARC.....	...../...../.....
Last swap date (if applicable, <3 month)	...../...../.....
Defect code found by ARC.....	<input type="text"/> <input type="text"/>
Second NFF Return .....	<input type="checkbox"/> YES <input type="checkbox"/> NO

- Proc 0 01
- Proc 1 01
- Proc 1 04
- Proc 1 06
- Proc 1 08
- Proc 1 12
- Proc 1 13
- Proc 1 18
- Proc 1 20
- Proc 1 22
- Proc 1 26
- Proc 1 28
- Proc 1 29
- Proc 1 32
- Proc 1 36
- Proc 1 37
- Proc 2 05
- Proc 2 06
- Proc 2 07
- Proc 3 01
- Proc 3 02
- Proc 4 01
- Symptom
- Symp 01
- Symp 02
- Symp 03
- Symp 04
- Symp 05
- Symp 06
- Symp 07
- Symp 08
- Symp 09
- Symp 10
- Test
- Test 01
- Test 02
- Test 03
- Test 04
- Test 05
- Test 06
- Test 07

Code SAGEM	Type de défauts	Type of fault
<b>PROBLEME D'AFFICHAGE</b>		<b>DISPLAY PROBLEM</b>
A1	PAS D'AFFICHAGE - LCD INTERNE DEFECTUEUX	NO POWER UP - DEFECTIVE INTERNAL LCD
A3	BLOCAGE DE L'AFFICHAGE LCD INTERNE	FREEZES UP INTERNAL LCD
A5	AFFICHEUR CASSE LCD INTERNE	BROKEN INTERNAL LCD
A6	LIGNE, DIGIT OU PIXEL MANQUANT, CONTRASTE, COULEUR LCD INTERNE	MISSING LINE, DIGIT or PIXEL, CONTRAST, COLOR INTERNAL LCD
A7	PB RETROECLAIRAGE LCD INTERNE	BACKLIGHT'S PROBLEM INTERNAL LCD
A11	PAS D'AFFICHAGE LCD EXTERNE DEFECTUEUX	NO POWER UP - DEFECTIVE EXTERNAL LCD
A13	BLOCAGE DE L'AFFICHAGE LCD EXTERNE	FREEZES UP EXTERNAL LCD
A14	AFFICHEUR CASSE LCD EXTERNE	BROKEN EXTERNAL
A15	LIGNE, DIGIT OU PIXEL MANQUANT, CONTRASTE, COULEUR LCD EXTERNE	MISSING LINE, DIGIT or PIXEL, CONTRAST, COLOR EXTERNAL LCD
A16	PB RETROECLAIRAGE LCD EXTERNE	BACKLIGHT'S PROBLEM EXTERNAL LCD
<b>PROBLEME D'ANTENNE</b>		<b>ANTENNA PROBLEM</b>
A10	ANTENNE CASSEE / ABSENTE	BROKEN / MISSING ANTENNA
<b>PROBLEME D'ALIMENTATION / CHARGEUR</b>		<b>POWER SUPPLY / CHARGING PROBLEM</b>
B1	CONTACT BATTERIE DU MOBILE DEFECTUEUX	DEFECTIVE MOBILE BATTERY CONTACT
B2	CONNECTEUR DE CHARGE DU MOBILE DEFECTUEUX	DEFECTIVE MOBILE CHARGER CONNECTOR
B3	ALIMENTATION CARTE DEFECTUEUSE	DEFECTIVE POWER SUPPLY OF THE BOARD
B4	AFFICHAGE CHARGE DEFECTUEUX	DEFECTIVE CHARGE ICON DISPLAY
B5	CONSOMMATION MODE ET INT	CURRENT CONSUMPTION WITH PHONE OFF
B7	PROBLEME D'AUTONOMIE	INSUFFICIENT BATTERY DURATION
B8	BATTERIE DEFECTUEUSE	ELECTRICALLY DEFECTIVE BATTERY
B9	TENUE MECANIQUE BATTERIE	MECHANICAL LOCK PROBLEM ON BATTERY
B10	BATTERIE CASSEE	BROKEN BATTERY
B11	CHARGEUR DEFECTUEUX	DEFECTIVE CHARGER
B12	CHARGEUR CASSE	BROKEN CHARGER
B13	COUPEURE INTERMITTENTE AVEC REDEMARRAGE	INTERMITTENT SWITCH OFF WITH REBOOT
B14	COUPEURE INTERMITTENTE SANS REDEMARRAGE	INTERMITTENT SWITCH OFF WITHOUT REBOOT
<b>PROBLEME DE CLAVIER</b>		<b>KEYBOARD PROBLEM</b>
C1	CLAVIER INOPERANT CORPS PRINCIPAL	NOT FUNCTIONING BODY KEYBOARD
C2	PROBLEME TOUCHE LATERALE	SIDE KEY PROBLEM
C3	CLAVIER INOPERANT FLAP/SLIDE	NOT FUNCTIONING FLIP OR SLIDE KEYBOARD
<b>MESSAGE D'ERREUR</b>		<b>ERROR MESSAGE</b>
D1	SIM ABSENTE	SIM MISSING
D2	AUTRES MESSAGES	OTHER MESSAGES
D4	MOBILE NON REGLE	UNTUNED MOBILE
D6	SIM VERROU	SIM VERROU
D7	CODE POSTE	POST CODE BLOCKED
D8	RETOUR SAV	SAV RETURN
<b>PROBLEME AUDIO</b>		<b>AUDIO PROBLEM</b>
E1	HP DEFECTUEUX	DEFECTIVE LOUDSPEAKER (beats)
E3	MICRO DEFECTUEUX	DEFECTIVE MICROPHONE
E5	PROBLEME DE VIBREUR	VIBRATING DEVICE PROBLEM
E6	CONNECTEUR AUDIO DEFECTUEUX	DEFECTIVE AUDIO CONNECTOR
<b>PROBLEME DE COMMUNICATION</b>		<b>COMMUNICATION PROBLEM</b>
F1	PAS DE LOCALISATION RESEAU	NO NETWORK RETRIEVAL
F2	COUPEURE DE COMMUNICATION	INTERMITTENT CALLS DROP
F4	TEST RADIO NON OK	TEST RADIO NOT OK
F5	ECHEC APPEL SORTANT	OUTGOING CALL FAILURE
F6	ECHEC APPEL ENTRANT	INCOMING CALL FAILURE
F7	PERTE TEMPORAIRE DE RESEAU	NETWORK TEMPORARY DROP
<b>PROBLEME COSMETIQUE / DEFAULT VISUEL</b>		<b>COSMETIC PROBLEM</b>
G1	VITRE CASSEE OU ABIMEE CORPS PRINCIPAL	BROKEN OR DAMAGED BODY GLASS
G2	COQUE CASSEE OU ABIMEE	BROKEN OR DAMAGED COVER
G3	FLAP CASSE OU ABIME	BROKEN OR DAMAGED FLIP
G5	CLAVIER CASSE OU ABIME CORPS PRINCIPAL	BROKEN OR DAMAGED BODY KEYBOARD
G6	BOUTON VERROU DEFECTUEUX	DEFECTIVE LOCK BUTTON
G7	VITRE CASSEE OU ABIMEE FLAP/SLIDE	BROKEN OR DAMAGED GLASS FLIP/SLIDE
G8	CLAVIER CASSE OU ABIME FLAP/SLIDE	BROKEN OR DAMAGED FLIP/SLIDE KEYBOARD
<b>AUTRES PROBLEMES</b>		<b>OTHER PROBLEM</b>
H1	KIT ACCESSOIRES HS (KIT PIETON CLASSIQUE, KITS BLUETOOTH...)	BROKEN OR DAMAGED ACCESSORY (PEDESTRIAN HEADSET, BLUETOOTH KITS...)
H2	FONCTION FM (MOBILE) OU MP3	FM OR MP3 FUNCTION (Mobile)
I1	TRACE D'OXYDATION	OXIDATION MARKS
I3	PAS DE DEFAULT CONSTATE	NO FAULT FOUND
I10	PAS DE DEFAULT CONSTATE SECOND RETOUR (sauf pendant la boucle courte)	NO FAULT FOUND SECOND RETURN (excepted during short loop process)
I5	MANQUE FONCTION DANS MENU	LACK FUNCTION IN THE MENU
I6	CONNECTEUR SIM DEFECTUEUX	DEFECTIVE SIM CONNECTOR
I7	DYSFONCTIONNEMENT D'UNE FONCTION DU MENU	MAJFUNCTION OF THE MENU
I8	RECONFIGURATION DU MOBILE	MOBILE RETROFIT
I9	BLACK LISTE	BLACK LIST
<b>PROBLEME MULTIMEDIA</b>		<b>MULTIMEDIA PROBLEM</b>
K2	FONCTION VIDEO	VIDEO FUNCTION
K4	FONCTION WAP	WAP FUNCTION
K5	FONCTION GPRS	GPRS FUNCTION
K6	FONCTION SMS, EMS, MMS	SMS, EMS, MMS FUNCTION
K7	NE COMMUNIQUE PAS AVEC UN PC	NO COMMUNICATION WITH A PC
K8	NE COMMUNIQUE PAS AVEC UN POCKET PC OU PALM	NO COMMUNICATION WITH A POCKET PC or PALM
K9	LIAISON DATA (MESSAGE "AUCUNE PORTEUSE DETECTEE")	DATA (MESSAGE "NO CARRIER DETECTED")
K10	TELECHARGEMENT JEUX	DOWNLOADING GAME
K11	TELECHARGEMENT IMAGE / SON / ECONOMISEUR D'ECRAN	DOWNLOADING PICTURE / RINGTONE / SCREEN SAVER
K12	PB DATA SANS FIL (IRDA, BLUETOOTH...)	WIRELESS DATA FUNCTION PB (IRDA, BLUETOOTH...)
K13	PB CONNECTIQUE SLOT I/O (SD/MMC)	SLOT I/O PB (SD/MMC)

**Procedure**

<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
<a href="#">Symptom</a>
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
<a href="#">Test</a>
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

<b>Cachet du Vendeur/Dealer's Stamp :</b>		<b>Informations Client /Information :</b>	
		Nom/Name :	
		Rue /Street :	
		Ville / City :	
		Code postal /Postcode :	
		Pays/Country :	
		Telephone /Phone :	
Nom du produit/product :		N° Série/Sérial n° :	
Date d'achat/Date of purchase :		N° IMEI :	
<b>Garantie/Warranty :</b>		<b>Hors garantie/Out of warranty :</b>	
Garantie standard/Standard warranty :		Garantie expirée /Expired warranty :	
Déjà réparé/préviously repaired :		Mauvaise utilisation / Missuse :	
Code SAGEM	Type de défaut	Kind of fault	
A0	AFFICHAGE DEFECTUEUX	DISPLAY MALFUNCTION	
A10	ANTENNE CASSEE / ABSENTE	ANTENNA BROKEN / MISSING	
B0	ALIMENTATION/CHARGE	POWER SUPPLY / NO CHARGE	
B7	PROBLEME D'AUTONOMIE	AUTONOMY	
B8	BATTERIE DEFECTUEUSE	BROKENBATTERY	
B11	CHARGEUR DEFECTUEUX	CHARGER MALFUNCTION	
C0	PROBLEME CLAVIER	KEYBOARD MALFUNCTION	
C2	PROBLEME TOUCHE LATERALE	LATERAL TOUCH PROBLEM	
D0	MESSAGE D'ERREUR	ERROR MESSAGE	
D1	SIM ABSENTE	SIM MISSING	
D7	CODE POSTE	POST CODE BLOCKED	
E0	PROBLEME AUDIO	AUDIO PROBLEM	
E3	MICRO DEFECTUEUX	MICROPHONE MALFUNCTION	
E5	PROBLEME DE VIBREUR	VIBRATING DEVICE MALFUNCTION	
F0	PROBLEME DE COMMUNICATION	COMMUNICATION MALFUNCTION	
G1	VITRE CASSEE OU ABIMEE	BROCKEN GLASS	
G2	COQUE CASSEE OU ABIMEE	BROCKEN COVER	
G3	FLAP CASSE OU ABIME	BROKEN FLIP	
G5	CLAVIER CASSE OU ABIME	BROCKEN KEYBOARD	
G6	BOUTON VERROU DEFECTUEUX	DEFECTIVE LOCK BUTTON	
K2	FONCTION VIDEO	VIDEO FUNCTION	
K3	FONCTION INFRAROUGE (IRDA )	INFRARED FUNCTION (IRDA)	
K4	FONCTION WAP	WAP FUNCTION	
K5	FONCTION GPRS	GPRS FUNCTION	
K6	FONCTION SMS, EMS, MMS.	SMS, EMS, MMS FUNCTION	
K7	NE COMMUNIQUE PAS AVEC UN PC	NO COMMUNICATION WITH A PC	
K8	NE COMMUNIQUE PAS AVEC UN POCKET PC OU PALM	NO COMMUNICATION WITH A POCKET PC or PALM	
K9	LIAISON DATA (MESSAGE "AUCUNE PORTEUSE DETECTEE")	DATA ( MESSAGE "NO CARRIER DETECTED")	
K10	TELECHARGEMENT JEUX	DOWNLOADING GAME	
K11	TELECHARGEMENT IMAGE / SON / ECONOMISEUR D'ECRAN	DOWNLOADING PICTURE / RINGTONE / SCREEN SAVE	
H1	KIT ACCESSOIRES HS	BROCKEN ACCESSORIES	
H2	FONCTION FM (MOBILE)	FM FUNCTION	
H3	FONCTION MONETIQUE	MONETIC FUNCTION	
I5	MANQUE FONCTION DANS MENU	LACK FUNCTION IN THE MENU	
I7	DYSFONCTIONNEMENT D'UNE FONCTION DU MENU	MALFUNCTION OF THE MENU	
I8	RECONFIGURATION DU MOBILE	MOBILE RETROFIT	
I9	BLACK LISTE	BLACK LIST	
I0	AUTRES DEFAULTS A PRESICER	OTHERS / TO BE PRECISED	

## OUT OF WARRANTY INTERVENTION

	<b>Remove and Place the I/O connector</b>	Proc Sheet 4 01
myC5-2v, myC5-2m		1/3


Procedure
<a href="#">Proc 0 01</a>
<a href="#">Proc 1 01</a>
<a href="#">Proc 1 04</a>
<a href="#">Proc 1 06</a>
<a href="#">Proc 1 08</a>
<a href="#">Proc 1 12</a>
<a href="#">Proc 1 13</a>
<a href="#">Proc 1 18</a>
<a href="#">Proc 1 20</a>
<a href="#">Proc 1 22</a>
<a href="#">Proc 1 26</a>
<a href="#">Proc 1 28</a>
<a href="#">Proc 1 29</a>
<a href="#">Proc 1 32</a>
<a href="#">Proc 1 36</a>
<a href="#">Proc 1 37</a>
<a href="#">Proc 2 05</a>
<a href="#">Proc 2 06</a>
<a href="#">Proc 2 07</a>
<a href="#">Proc 3 01</a>
<a href="#">Proc 3 02</a>
<a href="#">Proc 4 01</a>
Symptom
<a href="#">Symp 01</a>
<a href="#">Symp 02</a>
<a href="#">Symp 03</a>
<a href="#">Symp 04</a>
<a href="#">Symp 05</a>
<a href="#">Symp 06</a>
<a href="#">Symp 07</a>
<a href="#">Symp 08</a>
<a href="#">Symp 09</a>
<a href="#">Symp 10</a>
Test
<a href="#">Test 01</a>
<a href="#">Test 02</a>
<a href="#">Test 03</a>
<a href="#">Test 04</a>
<a href="#">Test 05</a>
<a href="#">Test 06</a>
<a href="#">Test 07</a>

**Notice:** The handsets requiring the replacement of system connectors cannot be repaired under Sagem warranty.

The eventual deterioration of the board due to a bad replacement of the connector fall under the Repair Centre responsibility.

**- Replacement procedure of DATA/ AUDIO/ CHARGE connector**

- 1-Disassemble the handset ( [Proc Sheet 1 20](#) )
- 2-Replace the defective connector (see below) **Ref: 28 700 046-0**
- 3 - Replace the electronic board in the mobile phone ( [Proc Sheet 1 20](#) )
- 4 -To test the replacement of the connector, it is necessary to:
  - a) Connect the mobile phone on SMT maintenance software (test Sheet 01)
  - b) Make real calls with a pedestrian handsfree Kit **Reference : 25-130 173-9**
  - c) Test the charge of mobile phone
- 5 - Standard test after repair

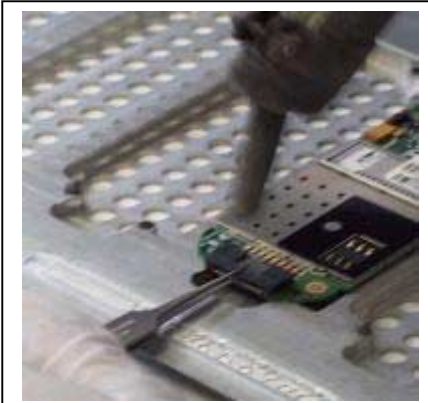

- Maintain the electronic board  
 - flux Correctly the pins of the connector.  
 - Reference of the flux to be used:  
 - LITTON flux -Supplier reference 952-D6  
                   -SAGEM reference 18 775 103-7  
 - With tweezers, hold the connector and heat the pins up.  
**ATTENTION:**  
 -Do not pull the connector but let it come , in order to avoid destroying the pads



**After having removed the connector, uncork rather quickly the four holes of the connector while the tin is still warm.**



**Flux and heat the pads in place of the connector to equalise the foot prints**



*In order to tin the pins of the DATA/ AUDIO/ CHARGE connector, load the solder wick with tin on approximately 1 inch.*



myC5-2v, myC5-2m

3/3

Procedure

Proc 0 01

Proc 1 01

Proc 1 04

Proc 1 06

Proc 1 08

Proc 1 12

Proc 1 13

Proc 1 18

Proc 1 20

Proc 1 22

Proc 1 26

Proc 1 28

Proc 1 29

Proc 1 32

Proc 1 36

Proc 1 37

Proc 2 05

Proc 2 06

Proc 2 07

Proc 3 01

Proc 3 02

Proc 4 01

Symptom

Symp 01

Symp 02

Symp 03

Symp 04

Symp 05

Symp 06

Symp 07

Symp 08

Symp 09

Symp 10

Test

Test 01

Test 02

Test 03

Test 04

Test 05

Test 06

Test 07




Before any operation,

-flux correctly the pins of the connector.

-with the solder wick loaded with tin , tin the pins of the DATA/ AUDIO/ CHARGE connector by positioning it straight ahead (pads upward), and by heating the solder wick which is in touch with pins.

**Attention:**

- At the end of the operation , verify that there is no short circuit between pads.

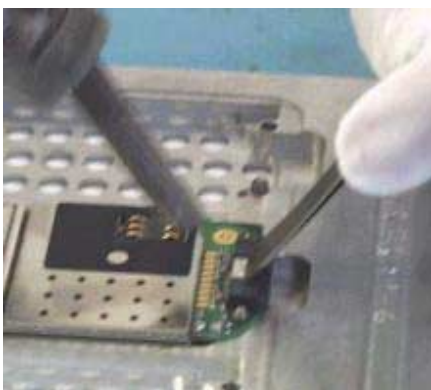

Start soldering the connector pins.

-Flux the place of the connector and position the DATA/ AUDIO/ CHARGE connector.

-Verify that the pins of the DATA/ AUDIO/ CHARGE connector are well centred on pads.

-Heat pins with an air blow device while maintaining the connector with tweezers

**-Verify that there is no short-circuit, that solders are shiny and that they cover well the pins**



At last, solder the 4 pins crossing the board..

## CHAPTER 6 - ACCESSORIES

### 6.1 CIGAR LIGHTER CHARGERAC1

#### 6.1.1 Description

This charger is for use in a car (or truck) only. The adapter is fitted with a cigar lighter type connector. AC1 is used to charge a mobile on a cigar lighter connector.

#### 6.1.2 Caractéristiques

Packaging :


Blister

Comment :

Input voltage : 10.8 to 30 V

No load voltage : 6.5 V

Output current : 500 mA

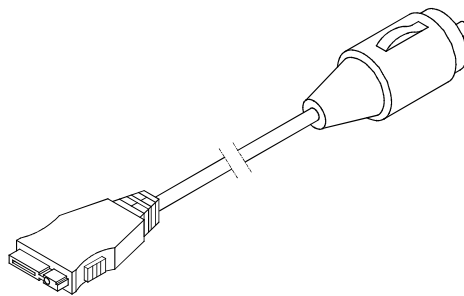

## 6.2 PEDESTRIAN HANDSFREE KIT


### 6.2.1 Description

Ear support with microphone on the cable for handsfree conversation

### 6.2.2 Caractéristiques

Comment :

Length: 1.25 m Dist. micro/loudspeaker: 25 cm



## 6.3 DATA CABLE PC USB

### 6.3.1 Description

Data cables are used for transferring data through standard equipment.

### 6.3.2 Caractéristiques

Packaging :  
Blister

## CHAPTER 7 - TECHNICAL INFORMATION BULLETIN

### 7.1 PURPOSE

The purpose of the Technical Information Bulletin (TIB) is to complete the maintenance operations described in this document. They give to the repair centers the complementary technical informations and the corrective procedures to be applied to maintain the product following it's evolution.

### 7.2 APPLICATION

The Technical Information Bulletin (TIB) are reference and must be applied by the repair centers. The Technical Information Bulletin (TIB) will be sent only to the concerned repair centers. The Technical Data Bulletin will not be received by the repair centers with a reference number in sequence.

The follow up of the Technical Information Bulletin (TIB) and the action being to be performed are under the responsibility of the repair centers.

## CHAPTER 8 - ILLUSTRATED PARTS CATALOG

### 8-1 SPARE PARTS myC5-2m, myC5-2v

ASSEMBLY	Quantity	Designation
5	1	Lower cover
10	1	Upper cover
15	1	Keypad
20	1	Antenna
25	1	FPC
30	1	Battery cover
35	4	Flap screw
40	1	Assembled loudspeaker
50	1	Battery
55	1	Volume Key
60	1	Spacer & metal dome
70	2	Screw protection
75	1	LCD
80	1	Flap upper housing
85	1	Main board
95	4	Body Screw
145	1	Vibrating device
150	1	Micro rubber
250	1	Flap lower housing
275	2	Conductive foam lower housing
310	1	Left screw cover
315	1	Right screw cover
320	1	camera window
325	1	FLAP small window
330	1	FLAP big window



# Index

## CHAPTER 1 - FOREWORD

1-1 HOW TO USE THE SITE TECHNICAL DOCUMENTATION	1-1
1-1-1 USE	1-2
1-2 ABREVIATIONS	1-2
1-3 COMMENTS SHEET	1-3

## CHAPTER 2 - DESCRIPTION - OPERATION

2-1 REMINDERS ABOUT THE GENERAL CHARACTERISTICS OF GSM AND PCS NETWORKS	2-1
2-2 REMINDERS ABOUT THE HAND SET CHARACTERISTICS	2-2
2-3 IN & OUT CONNECTOR	2-8
2-3-1 CONNECTOR DESCRIPTION	2-8
2-3-2 SIGNAL DESCRIPTION	2-8
2-4 IDENTIFICATION	2-9
2-4-1 ILLUSTRATION	2-9
2-4-2 DESCRIPTION	2-9
2-4-3 DESCRIPTION AFTER REPARATION	2-9
2-5 PHONE BLOCK DIAGRAMS	2-10
2-5-1 BLOCK DIAGRAM	2-10
2-5-2 STANDARDS AND ENVIRONMENT	2-10
2-6 EQUIPMENTS	2-10
2-6-1 BATTERY PACKS	2-10
2-6-1-1 CHARACTERISTICS	2-10
2-6-1-2 DESCRIPTION	2-11
2-6-1-3 CHARGING TIME	2-12
2-6-2 MAINS MODULES	2-12
2-6-2-1 DESCRIPTION	2-12
2-6-2-2 TRAVEL MAINS MODULES	2-12
2-6-2-3 SIMPLE MAINS MODULES	2-13



## CHAPTER 3 - SYMPTOMS

3-1 GENERAL	3-1
3-2 LIST OF REPORTED DEFECTS	3-4
3-3 ERROR MESSAGES DURING START UP	3-8
3-4 OTHER ERROR MESSAGES	3-8
3-5 LIST OF OBSERVED DEFECTS	3-10
3-6 INFORMATION ABOUT NEW NOTICED FAULTS	3-10
SYMPTOM SHEETS	3-11
Symp sheet 01 - Endurance battery and charger problem	3-12
Symp sheet 02 - communication problem	3-13
Symp Sheet 03 - no fault given	3-14
Symp Sheet 04 - DISPLAY PROBLEM	3-15
Symp Sheet 05 - Keypad problem	3-16
Symp Sheet 06 - Ring tones problem	3-17
Symp Sheet 07 - vibrating device problem	3-18
Symp Sheet 08 - Audio problem	3-19
Symp Sheet 09 - Camera problem	3-20
Symp Sheet 10 - LOUDSPEAKER PROBLEM	3-21

## CHAPTER 4 - TESTS AND CHECKS

4-1 GENERAL ABOUT TESTS	4-1
4-2 TEST TOOLS	4-1
4-3 INSTALLING ON A WORKSTATION (SMT STATION)	4-1
4-3-1 MINIMUM REQUIRED CONFIGURATION	4-1
4-3-2 INSTALLING THE CRA DOWNLOADING KIT	4-1
4-3-3 SMT FUNCTIONS	4-2
TEST SHEETS	4-3
Test Sheet 01 - TEST AND CHECK BY SMT	4-4
Test Sheet 02 - CHARGER TEST	4-11

Test Sheet 03 - BATTERY TEST	4-12
Test Sheet 04 - CONSUMPTION TEST	4-13
Test Sheet 05 - HOTLINE MENU	4-14
Test Sheet 06 - RADIO TEST	4-15
Test Sheet 07 - PHOTO TEST	4-17
CHAPTER 5 - MAINTENANCE PROCEDURES	
5-2 SHORT LOOP PROCESS	5-1
5-1 TECHNICAL WORK LEVELS	5-3
5-2 SHORT LOOP PROCESS	5-3
5-3 MAINTENANCE TOOLS	5-3
LEVEL 0 MAINTENANCE	5-5
Proc Sheet 0 01 - Remove and Place the Battery	5-6
LEVEL 1 MAINTENANCE	5-7
Proc Sheet 1 01 - Remove and Place mobile lower housing	5-8
Proc Sheet 1 04 - Remove and Place the keypad	5-10
Proc Sheet 1 06 - Remove and Place mobile lower housing conductive foam	5-11
Proc Sheet 1 08 - Remove and Place metal dome	5-12
Proc Sheet 1 12 - Remove and Place FLAP big window	5-13
Proc Sheet 1 13 - Remove and Place mobile upper housing	5-14
Proc Sheet 1 18 - Remove and Place equipped electronic board	5-16
Proc Sheet 1 20 - Equipped electronic board exchange	5-18
Proc Sheet 1 22 - Remove and Place volume control key	5-21
Proc Sheet 1 26 - Remove and Place FLAP lower housing	5-22
Proc Sheet 1 28 - Remove and Place the camera	5-24
Proc Sheet 1 29 - Remove and Place the micro rubber	5-25
Proc Sheet 1 32 - Remove and Place FLAP upper housing	5-26
Proc Sheet 1 36 - Remove and Place the camera rubber	5-28
Proc Sheet 1 37 - Remove and Place FLAP small window	5-29
LEVEL 2 MAINTENANCE	5-30
Proc Sheet 2 05 - Remove and Place the two in one receiver	5-31

Proc Sheet 2 06 - Remove and Place the vibrator	5-33
Proc Sheet 2 07 - Remove and Place the LCD module	5-35
LEVEL 3 MAINTENANCE	5-38
Proc Sheet 3 01 - Return to Sagem factory	5-39
Proc Sheet 3 02 - return to the client	5-41
OUT OF WARRANTY INTERVENTION	5-42
Proc Sheet 4 01 - Remove and Place the IO connector	5-43
CHAPTER 6 - ACCESSORIES	
6-1 CIGAR LIGHTER CHARGERAC1	6-1
6-1-1 DESCRIPTION	6-1
6-1-2 CARACTÉRISTIQUES	6-1
6-2 PEDESTRIAN HANDSFREE KIT	6-2
6-2-1 DESCRIPTION	6-2
6-2-2 CARACTÉRISTIQUES	6-2
6-3 DATA CABLE PC USB	6-3
6-3-1 DESCRIPTION	6-3
6-3-2 CARACTÉRISTIQUES	6-3
CHAPTER 7 - TECHNICAL INFORMATION BULLETIN	
7-1 PURPOSE	7-1
7-2 APPLICATION	7-1
CHAPTER 8 - ILLUSTRATED PARTS CATALOG	
8-1 SPARE PARTS	8-1